


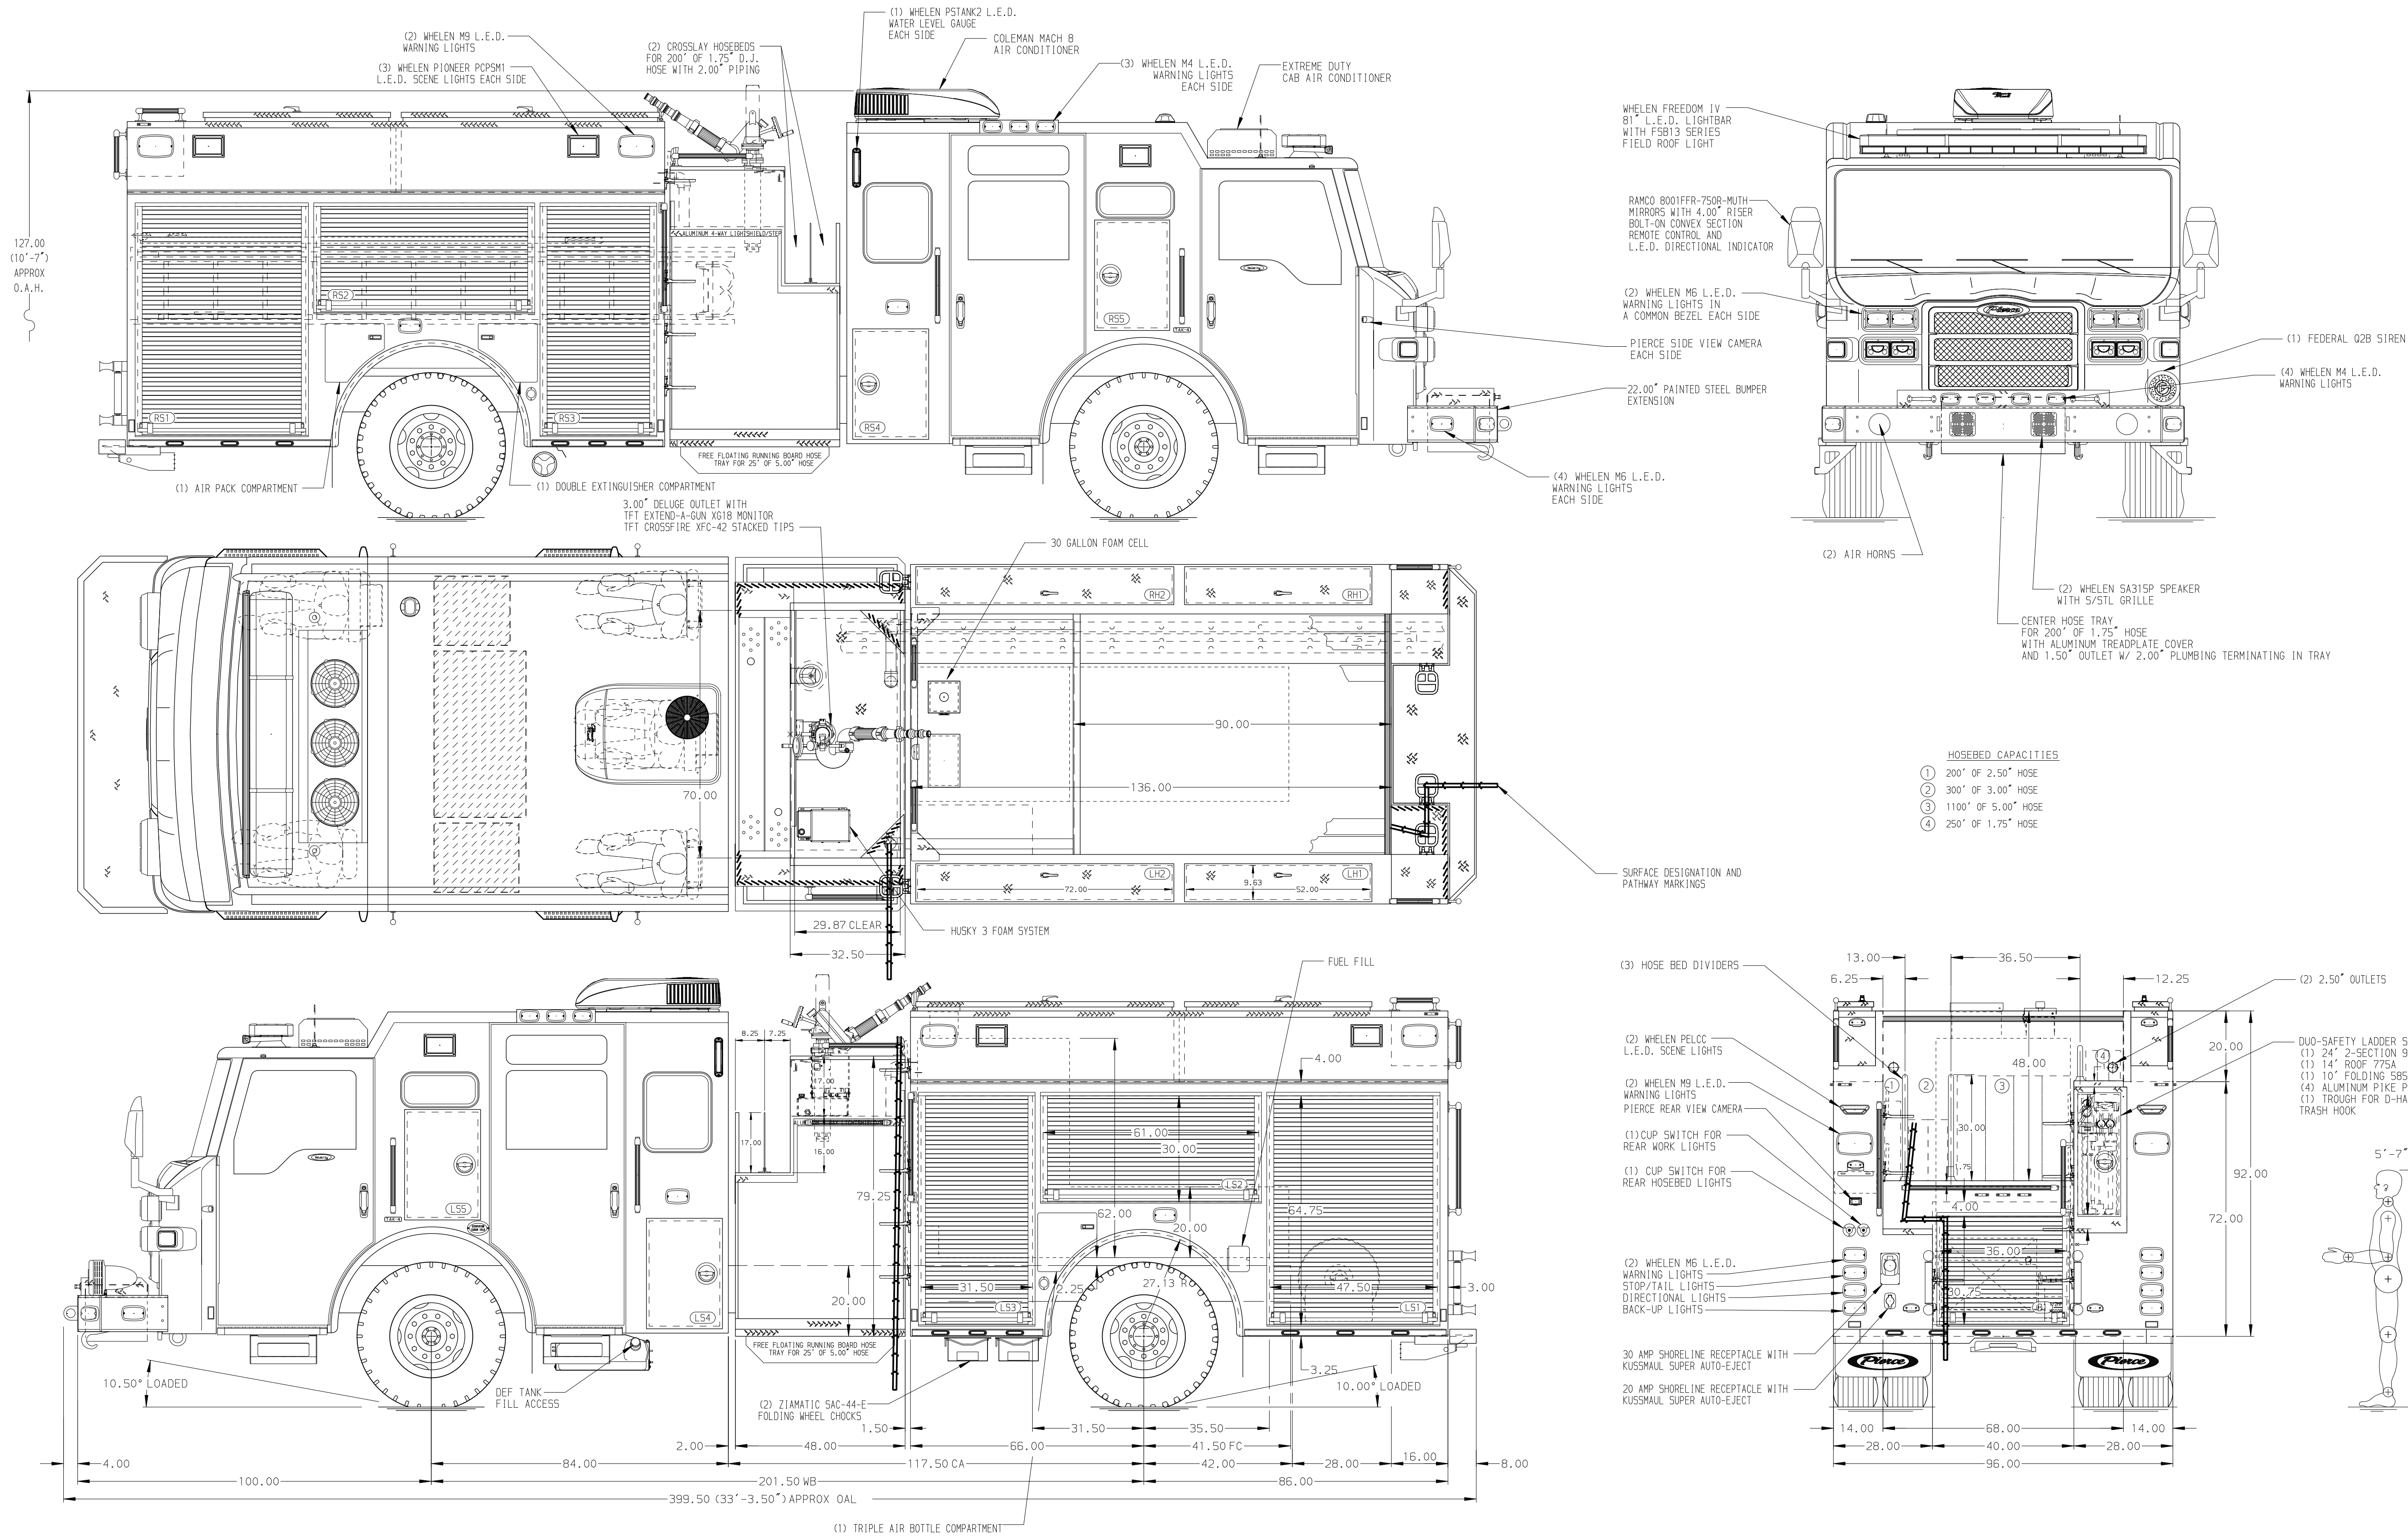

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED IN DRIVER'S SIDE FORWARD STEP WELL
- BATTERY CHARGER LOCATED IN DRIVER SIDE HATCH COMPARTMENT
- BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
- INVERTER XANTREX FREEDOM X, 817-2000 LOCATED PER ORDER
- ONE HANNAY BOOSTER REEL WITH CAPACITY FOR 200' OF 1.00" BOOSTER HOSE AND 1.50" PIPING LOCATED IN COMPARTMENT B1 (MODEL: EF34-23-24)

REV	DATE	BY	CH	VELOCITY
1	17FEB26	LST	KBO	CHASSIS DATA
2	16DEC25	LST	KBO	MAKE
3	06NOV25	LST	KBO	PIERCE
4	26SEP25	LST	KBO	MODEL

TITLE FOR DWG NO.	1500GPM, 530G TANK, 500G WATER, 30G FOAM 152" PUMPER, MUX GARLAND FIRE DEPARTMENT GARLAND, TEXAS 40127AD-SH1	Pierce MANUFACTURING INC.		JOB NO. SCALE DRAWN BY CHECKED BY SHEET SIZE	40127 01-03 DATE 18SEP25 19SEP25 SHEET NO. 1 OF 2
				JWR	
				KBO	
				D	