


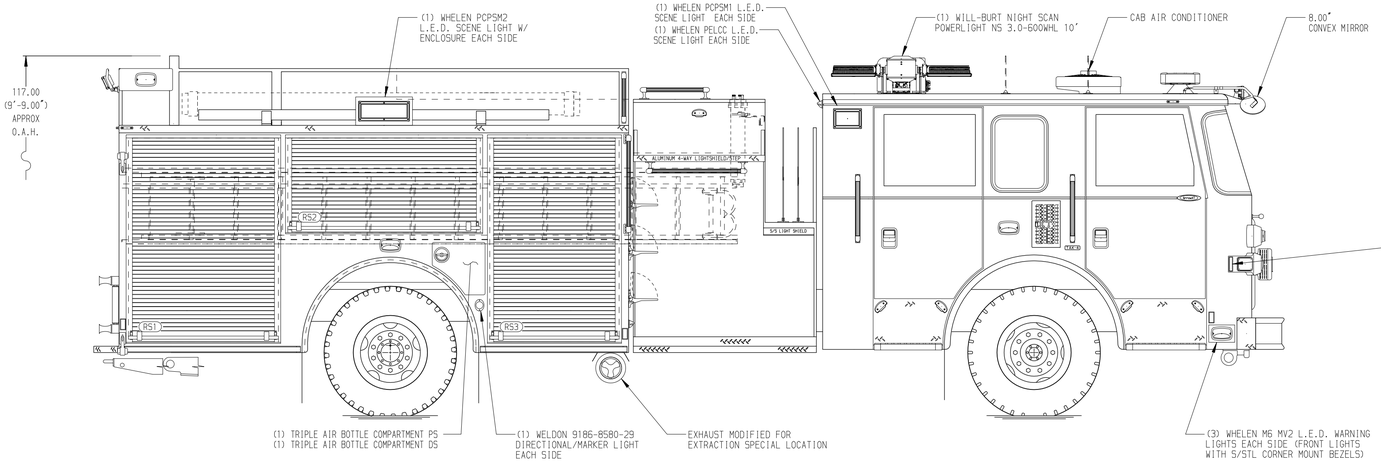


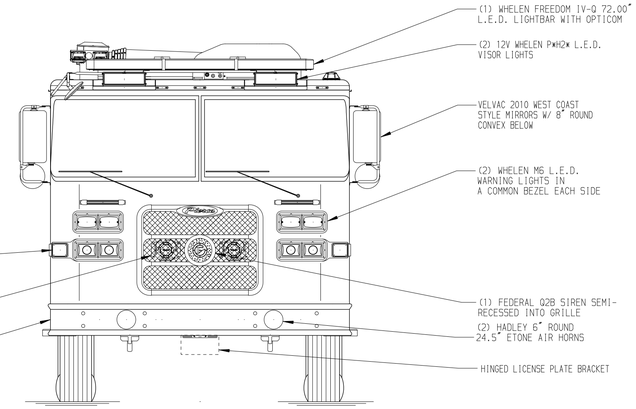

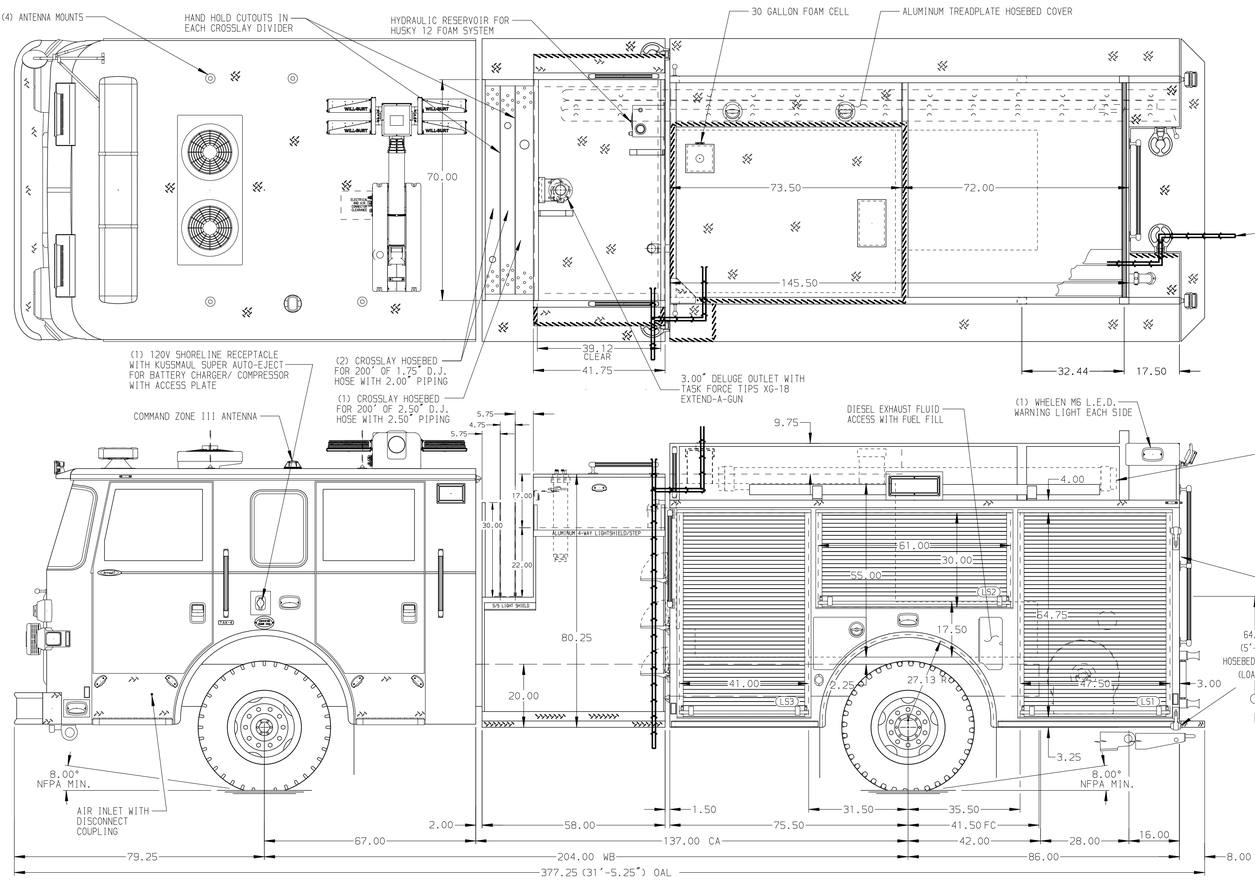

HOSEBED CAPACITIES

1. 200' OF 2.50" D.J. HOSE
2. 200' OF 1.75" D.J. HOSE
3. 200' OF 1.75" D.J. HOSE
4. 1200' OF 4.00" L.D. HOSE
5. 300' OF 3.00" D.J. HOSE

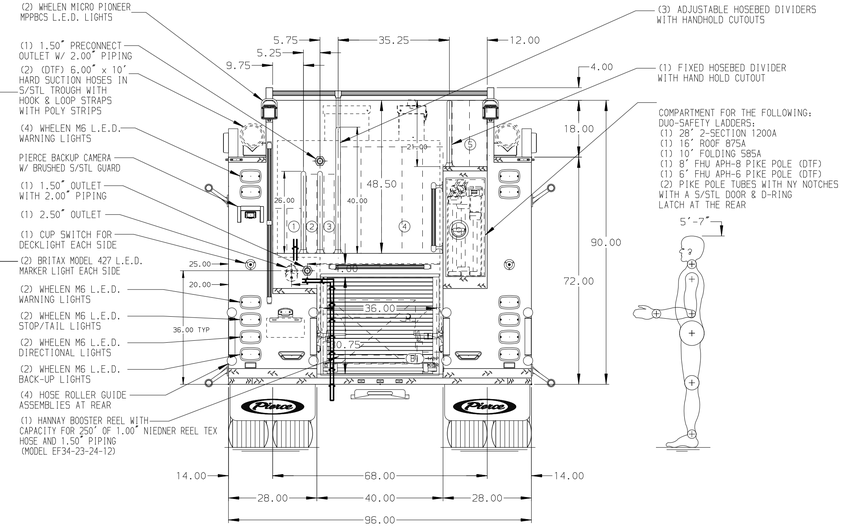

STAINLESS STEEL BODY | MAXIMUM O.A.H. 116.50" | MAXIMUM O.A.L. 378" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED IN CREW CAB SEAT RISER
3. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET

REV	DATE	BY	CH
V	04FEB26	LST	ARG
V	22DEC25	LST	ARG

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT

Pierce MANUFACTURING INC.

TITLE: 1500 GPM, 750 G TANK, 720 G WATER, 30 G FOAM CELL 161" BODY, MUX
FOR: FALMOUTH FIRE DEPARTMENT FALMOUTH, MASSACHUSETTS
DWG NO.: 40181AD-SH1

JOB NO.: 40181
SCALE: 1:24
DATE
DRAWN BY: LST 05JUN25
CHECKED BY: SZE 06JUN25
SHEET SIZE: D
SHEET NO.: 1 OF 2

View File Created 06-FEB-2026 10:19:47