

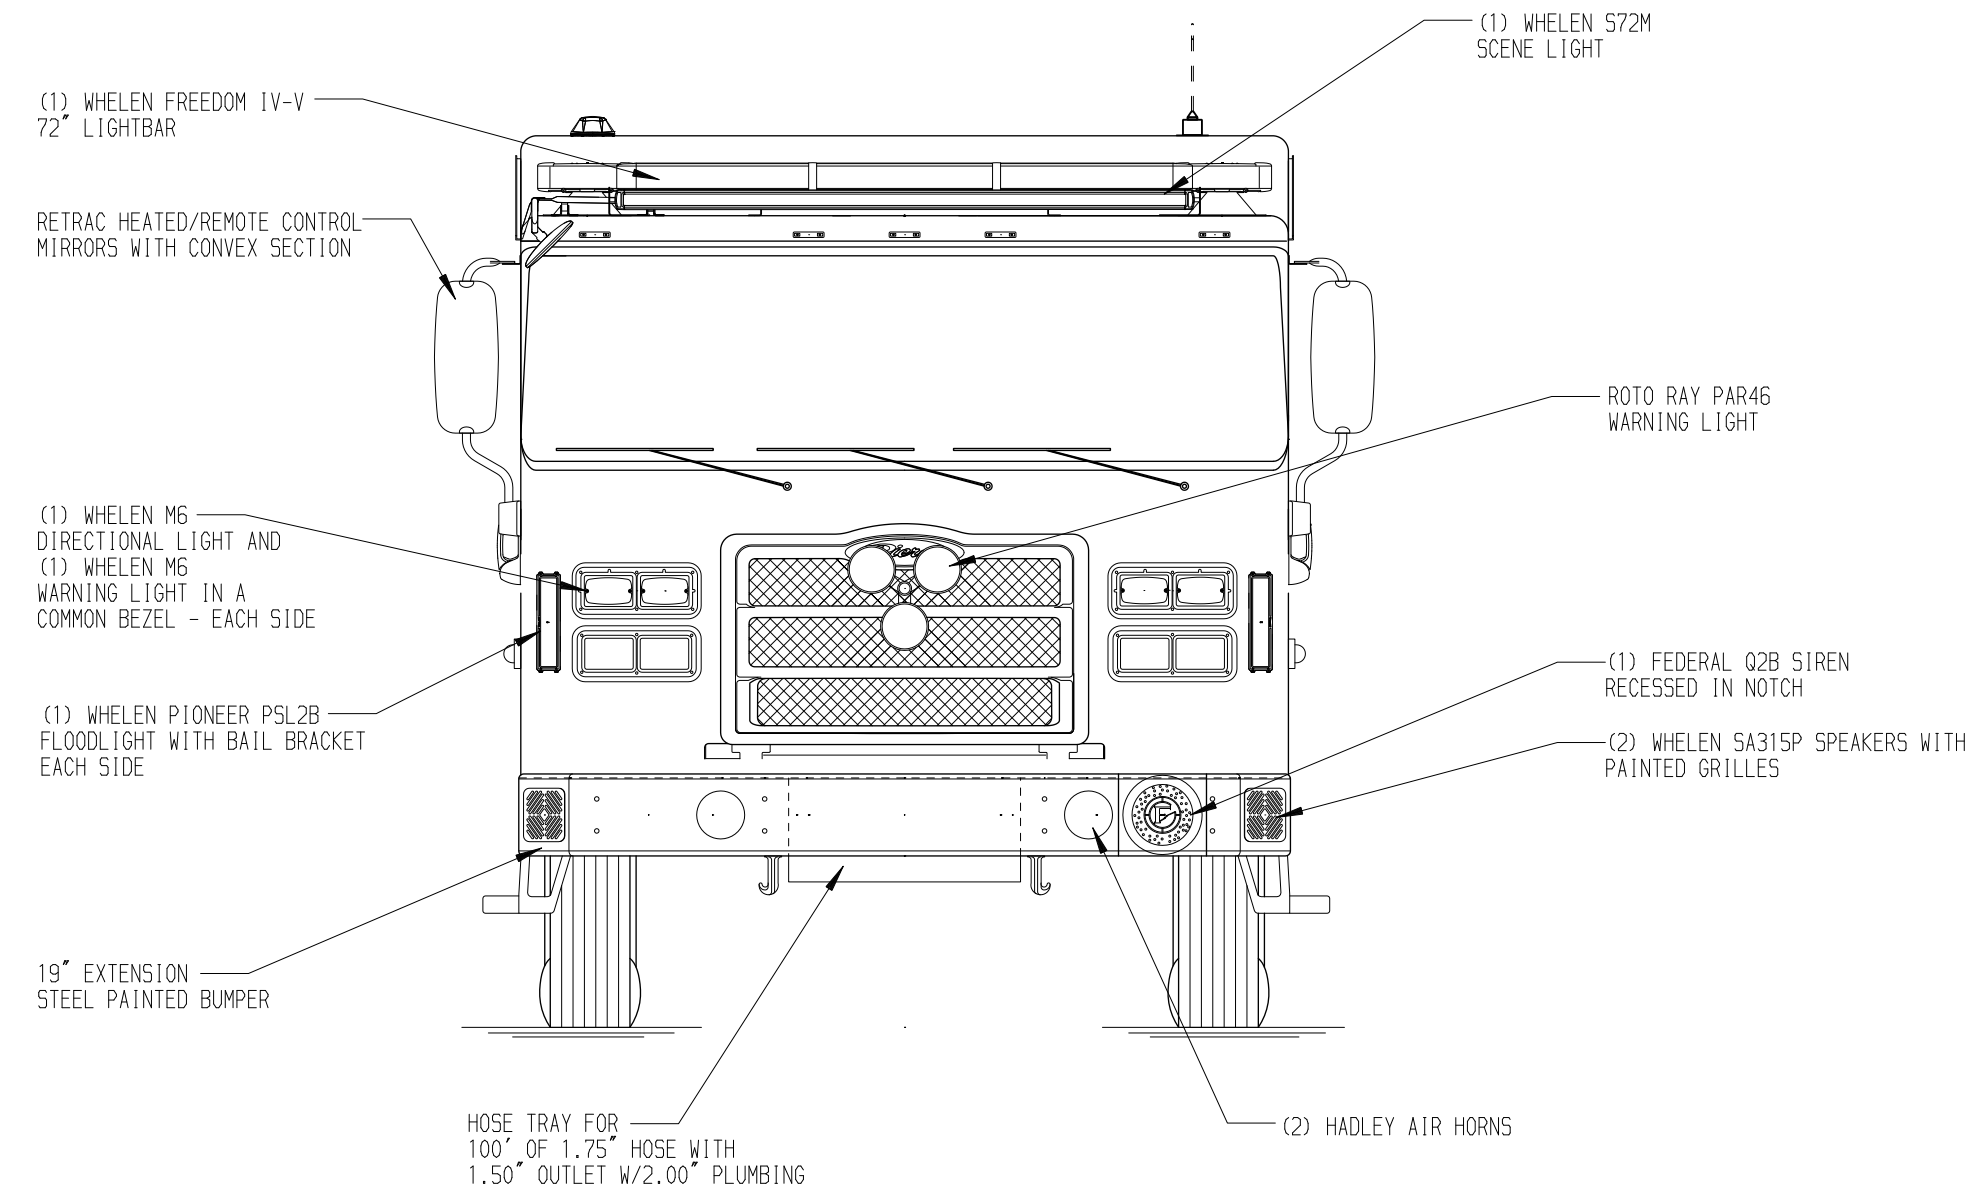
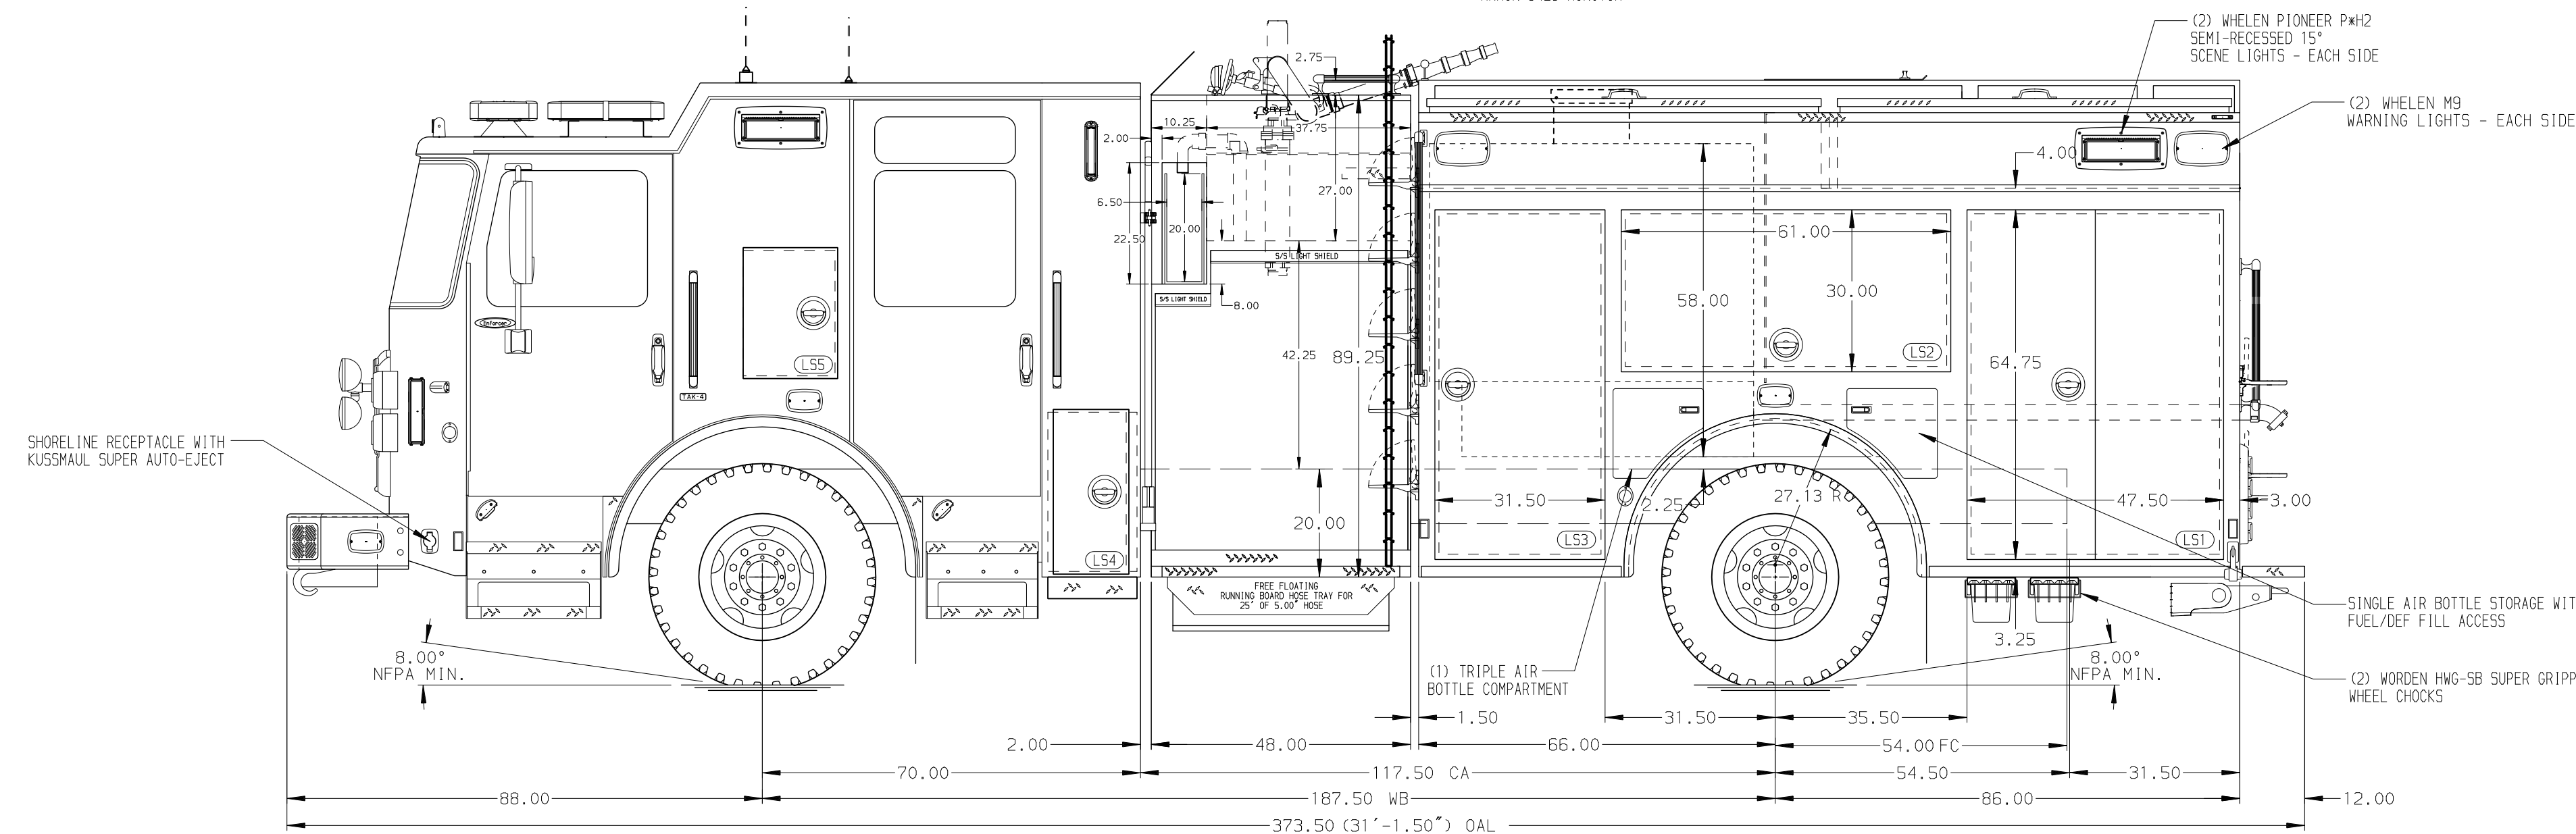
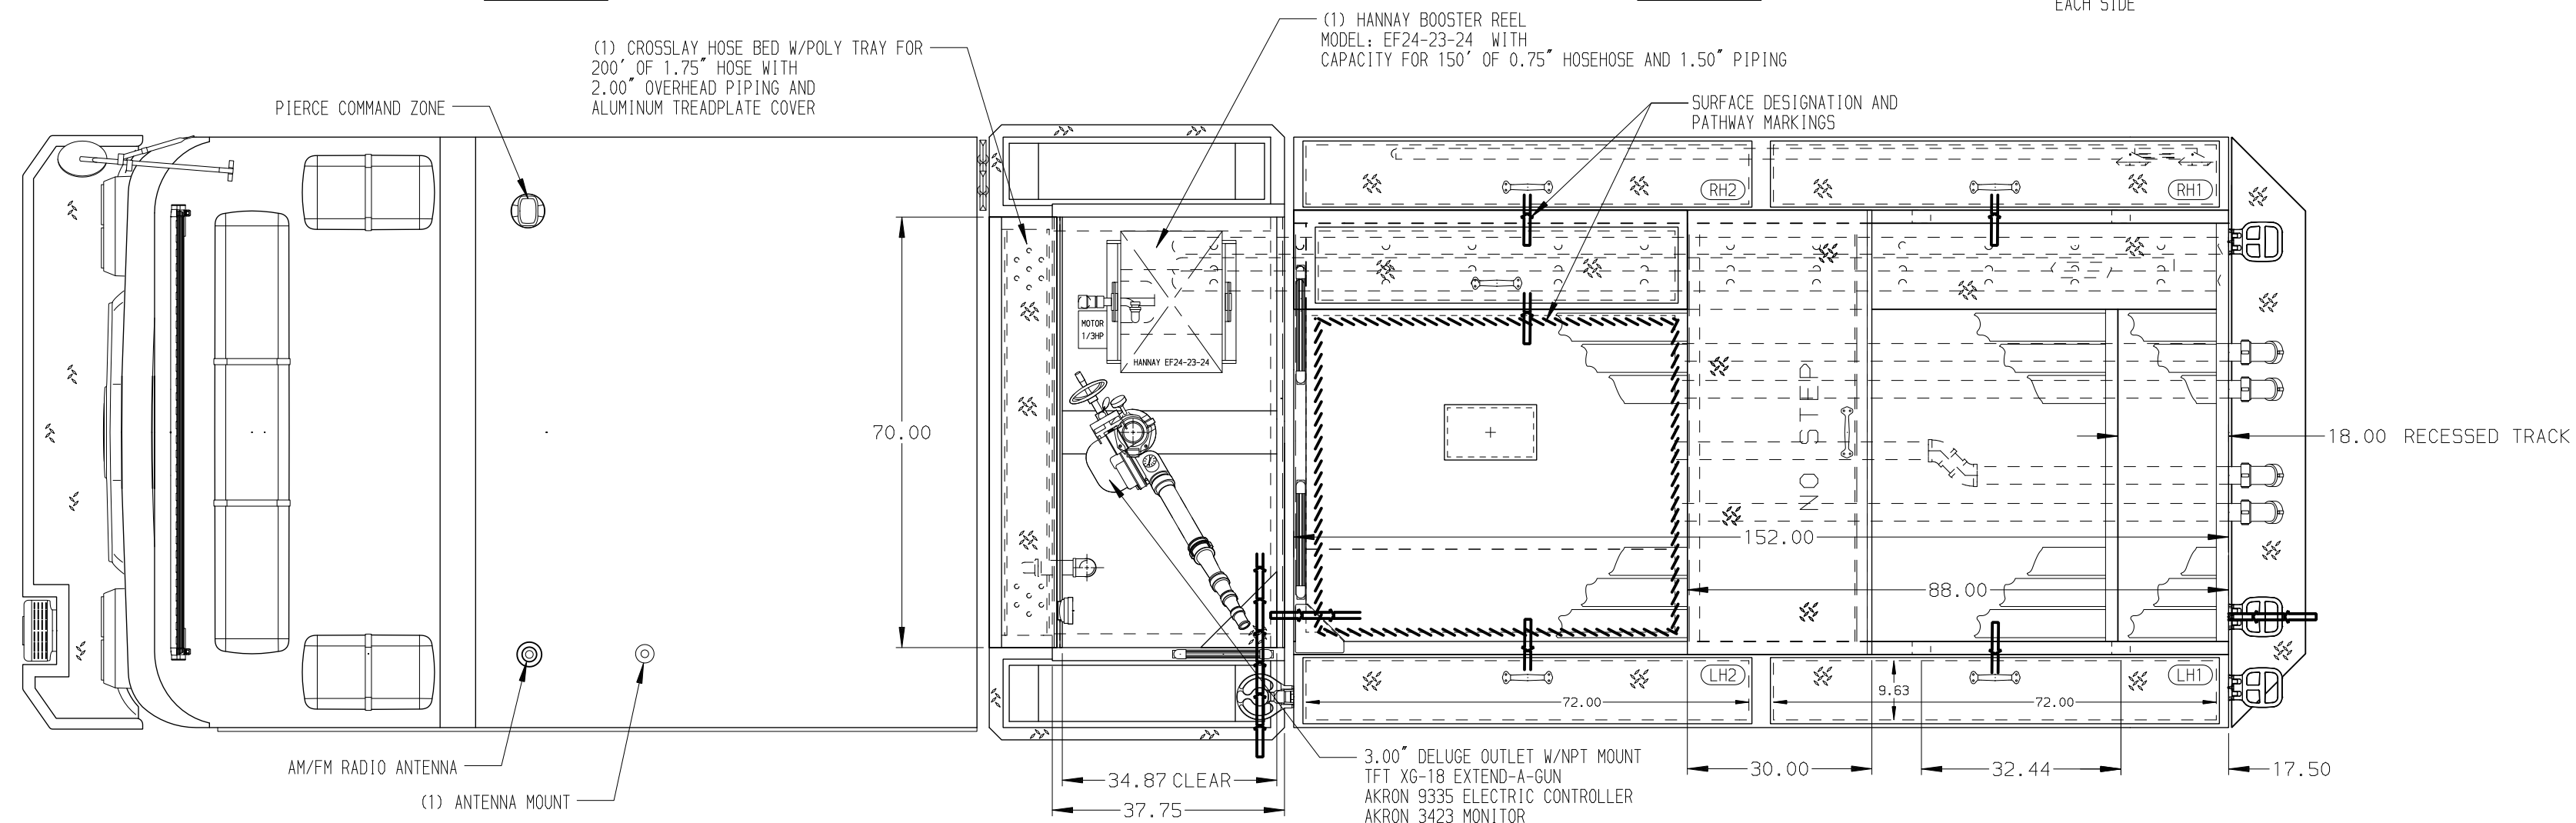


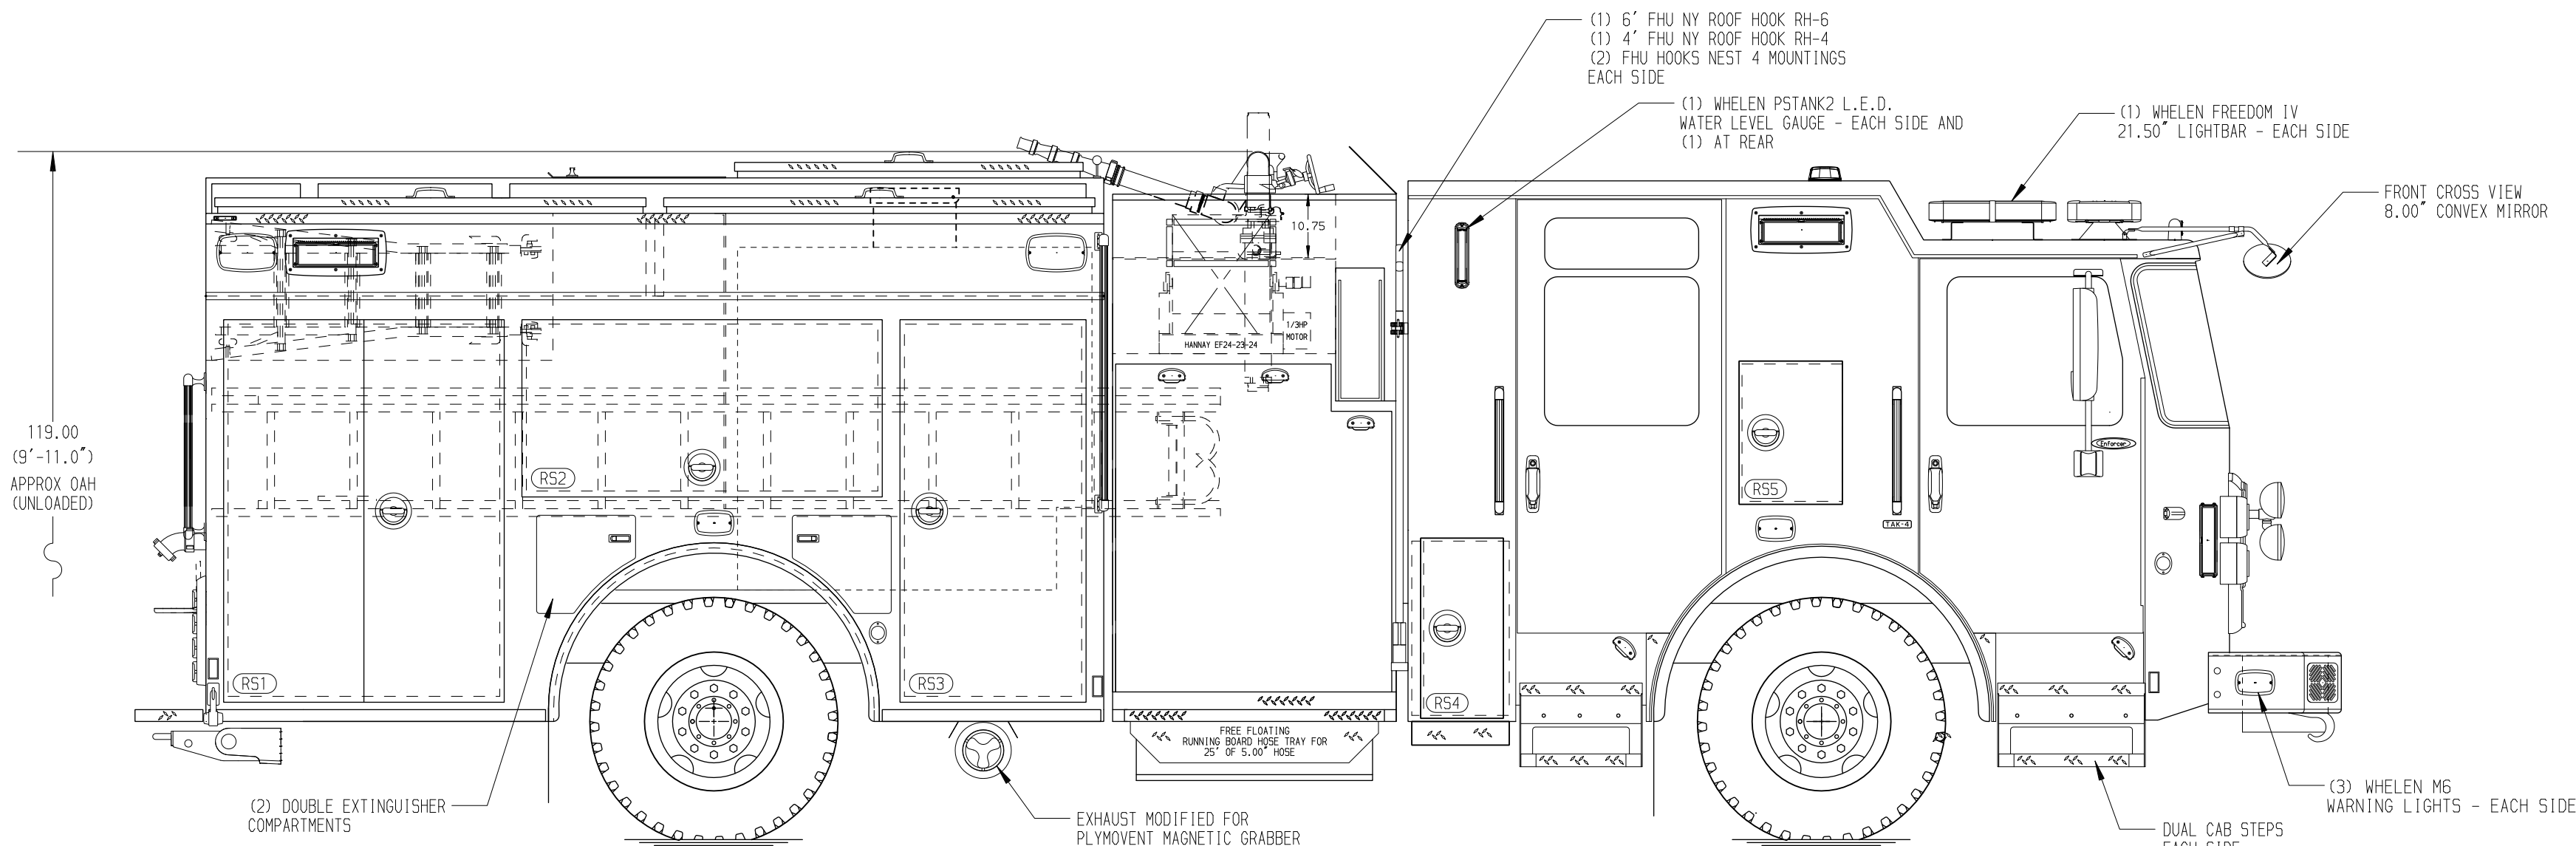

HOSEBED CAPACITIES

- ① - 400' OF 2.50" DJP HOSE
- ② - 200' OF 2.25" DJP HOSE
- ③ - 750' OF 5.00" DJP HOSE
- ④ - 400' OF 1.75" DJP HOSE
- ⑤ - 200' OF 1.75" DJP HOSE

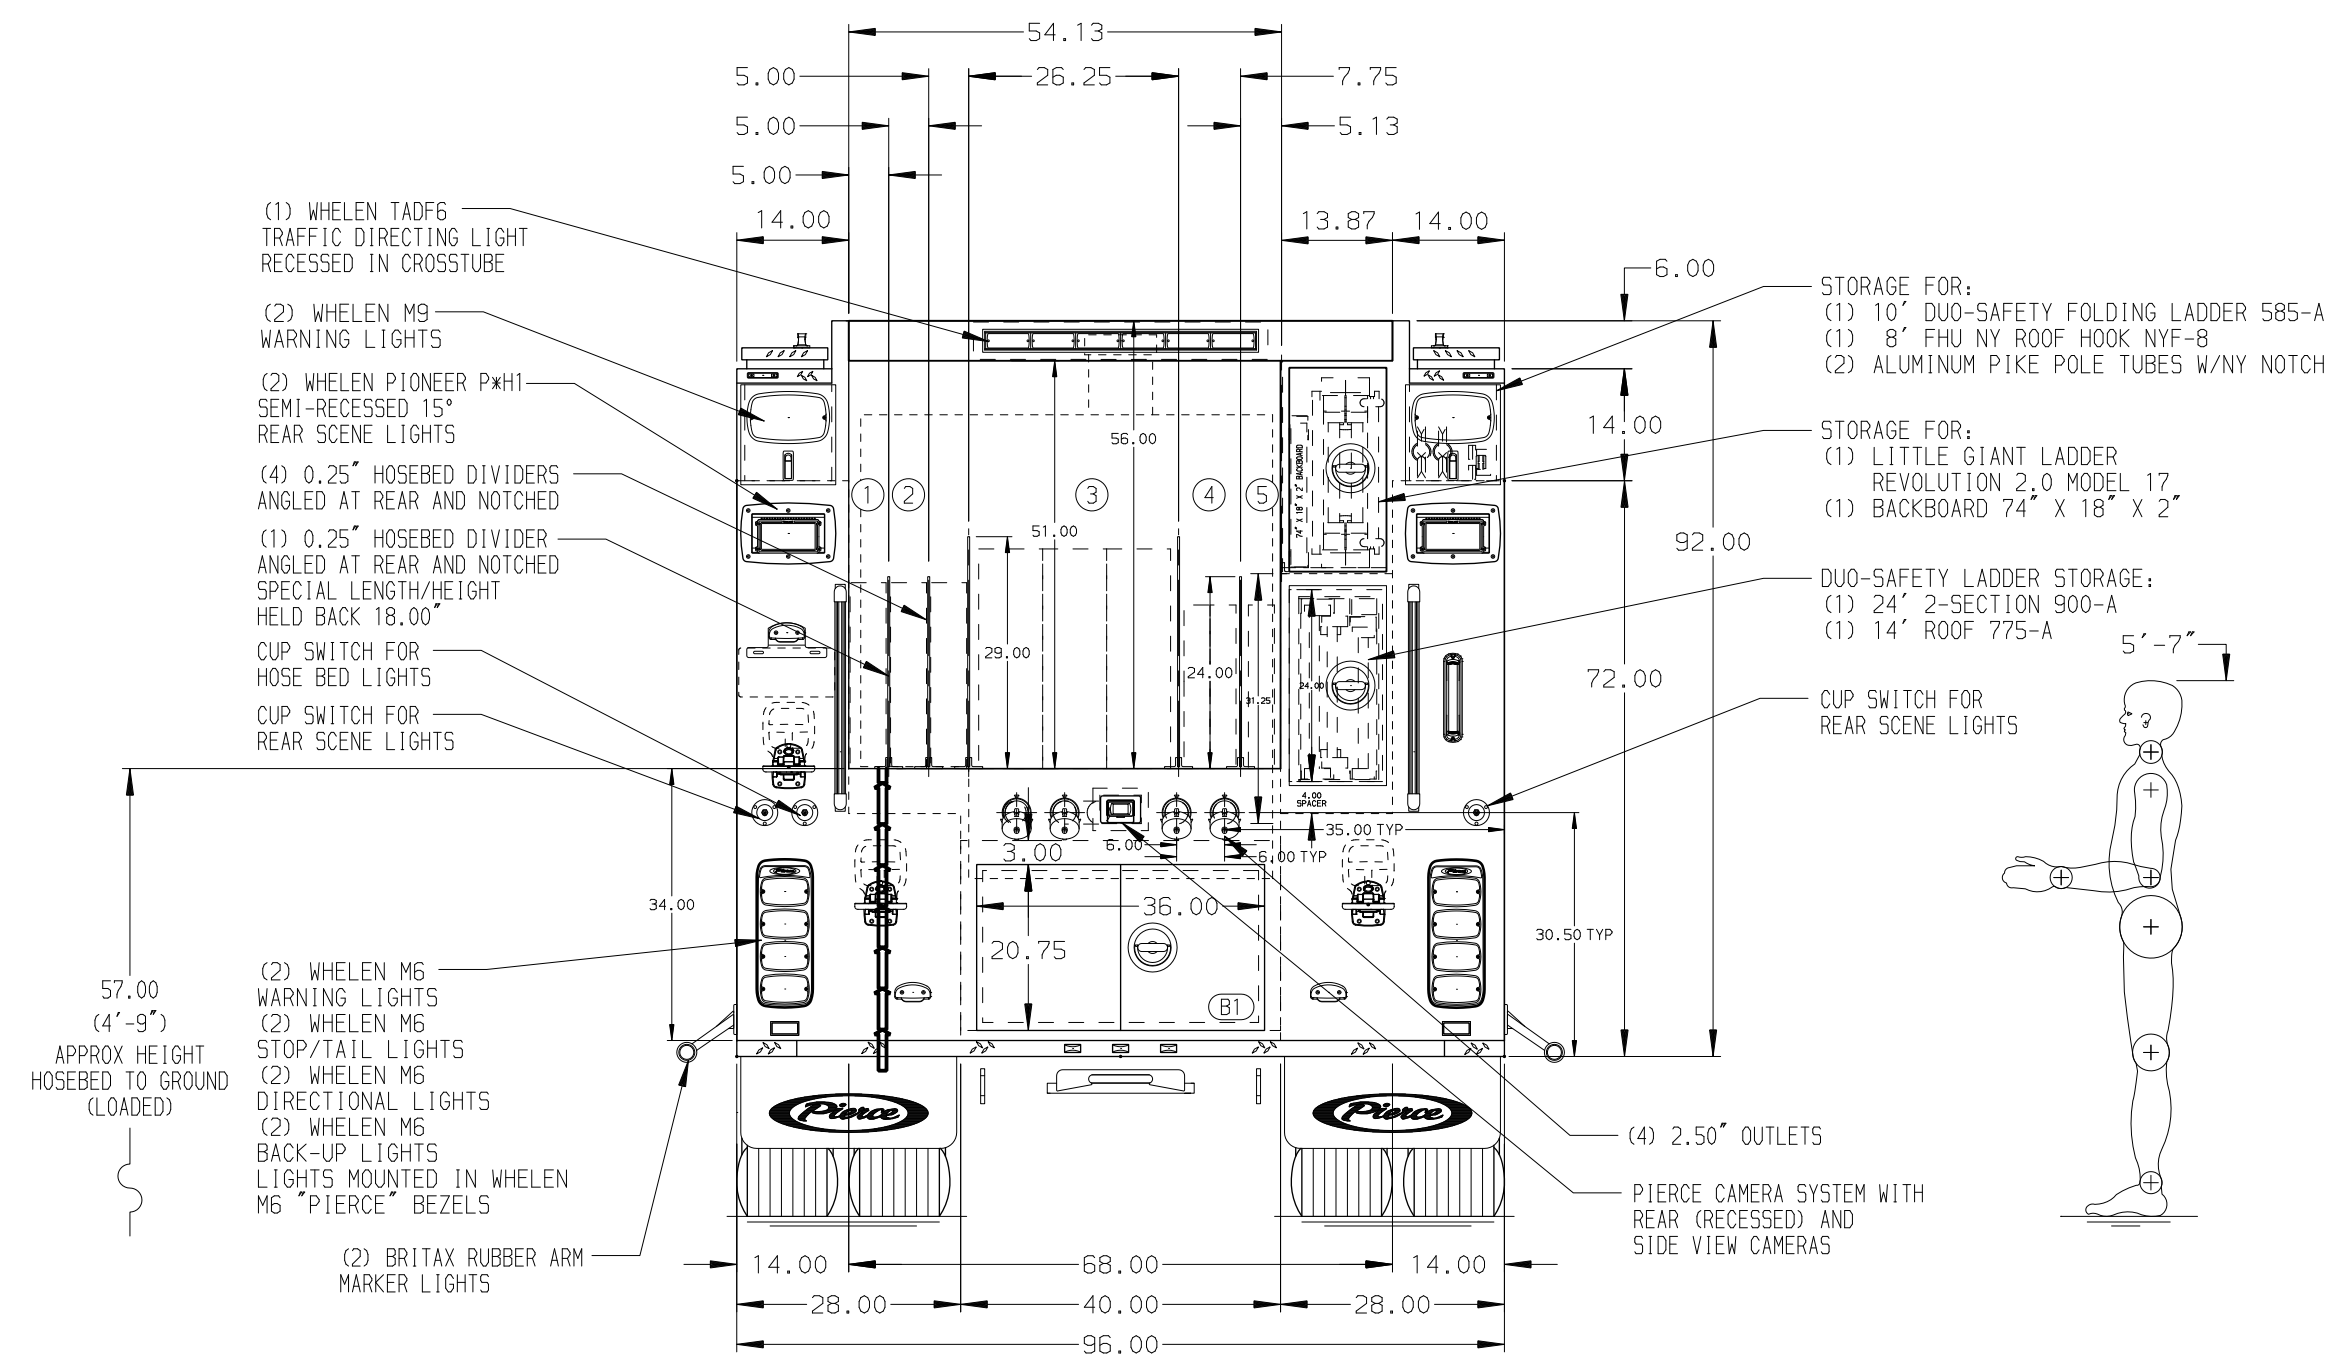

ALUMINUM BODY

SIDE ROLL & FRONTAL IMPACT PROTECTION

AIR RIDE REAR SUSPENSION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. AIR COMPRESSOR LOCATED BEHIND DRIVER'S SEAT
3. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
4. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
5. DRAIN AND BLEEDER VALVE LOCATED AT ALL INLETS AND OUTLETS PER ORDER
6. HOT WATER HEATER LOCATED IN PUMP COMPARTMENT PER ORDER
7. COLD CLIMATE PACKAGE
8. HOWLER SIREN SPEAKER SYSTEM LOCATED PER ORDER
9. TWO DUPLEX RECEPTACLE IN BODY COMPARTMENTS PER ORDER

REV	DATE	BY	CH	ENFORCER
1	12FEB26	SAM	PHA	CHASSIS DATA
2	17NOV25	SAM	PHA	MAKE
3	02SEP25	SAM	PHA	PIERCE
4	09JUL25	SAM	PHA	MODEL

		JOB NO.	40201-01-03
		SCALE	DATE
		1:24	
		DRAWN BY	27JUN25
		SAM	
		CHECKED BY	27JUN25
		SZE	
		SHEET SIZE	SHEET NO.
		D	1 OF 1

TITLE 1500GPM, 600G TANK, 600G WATER, OG FOAM 152" PUMPER, MUX
FOR IOWA CITY FIRE DEPARTMENT
IOWA CITY, IOWA
DWG NO. 40201AD