

**PUMPER BODY**  
Medium Aluminum 2nd Gen Pumper

**CHASSIS**  
Arrow XT Chassis

**ELECTRICAL SYSTEM**  
Hard Wired

**CHASSIS AXLE, FRONT, CUSTOM**  
22,800 Lb TAK-4 Axle

**AXLE, REAR**  
24,000 Lb Meritor Axle

**ENGINE**  
450 HP Cummins L9 Engine

**TRANSMISSION**  
Allison 6th Gen, 3000 EVS P

**BUMPER**  
19" Extended Pointed Steel

**CAB**  
6710 Arrow Cab

**BODY TOTAL TANK CAPACITY**  
525 Gallon New York Style Poly Tank

**WATER CAPACITY**  
500 Gallons of Water

**FOAM CELL CAPACITY**  
25 Gallon Foam Cell

**COMPT, PUMPER, REAR**  
30.75" FF Lap Door Rear Compt

**COMPT, PUMPER, LEFT SIDE**  
152" RollUp Full Height & Depth Front Full Height Rear, FDLER

**COMPT, PUMPER, RIGHT SIDE**  
152" RollUp Low FDLER

**FIRE SUPPRESSION PUMPHOUSE**  
45" Control Zone Top Mount

**PUMP**  
1500 GPM Waterous CSU

**CROSSLAYS, 1.50"**  
1.50" Crosslays Not Required

**CROSSLAYS, 2.50"**  
2.50" Crosslay Not Required

**SPEEDLAYS**  
(2) 1.50" Without Tray Std. Capacity


**GENERATOR**  
Generator Not Required

**FOAM SYSTEM**  
External Foam System

**SAFETY**

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET/OUTLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL IN RECESSED TREADPLATE BOX
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON DS OF CAB WHEELWELL
- SEVEN ADJUSTABLE SHELVES LOCATED PER ORDER
- THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
- ONE CTECH CABINET LOCATED PER ORDER

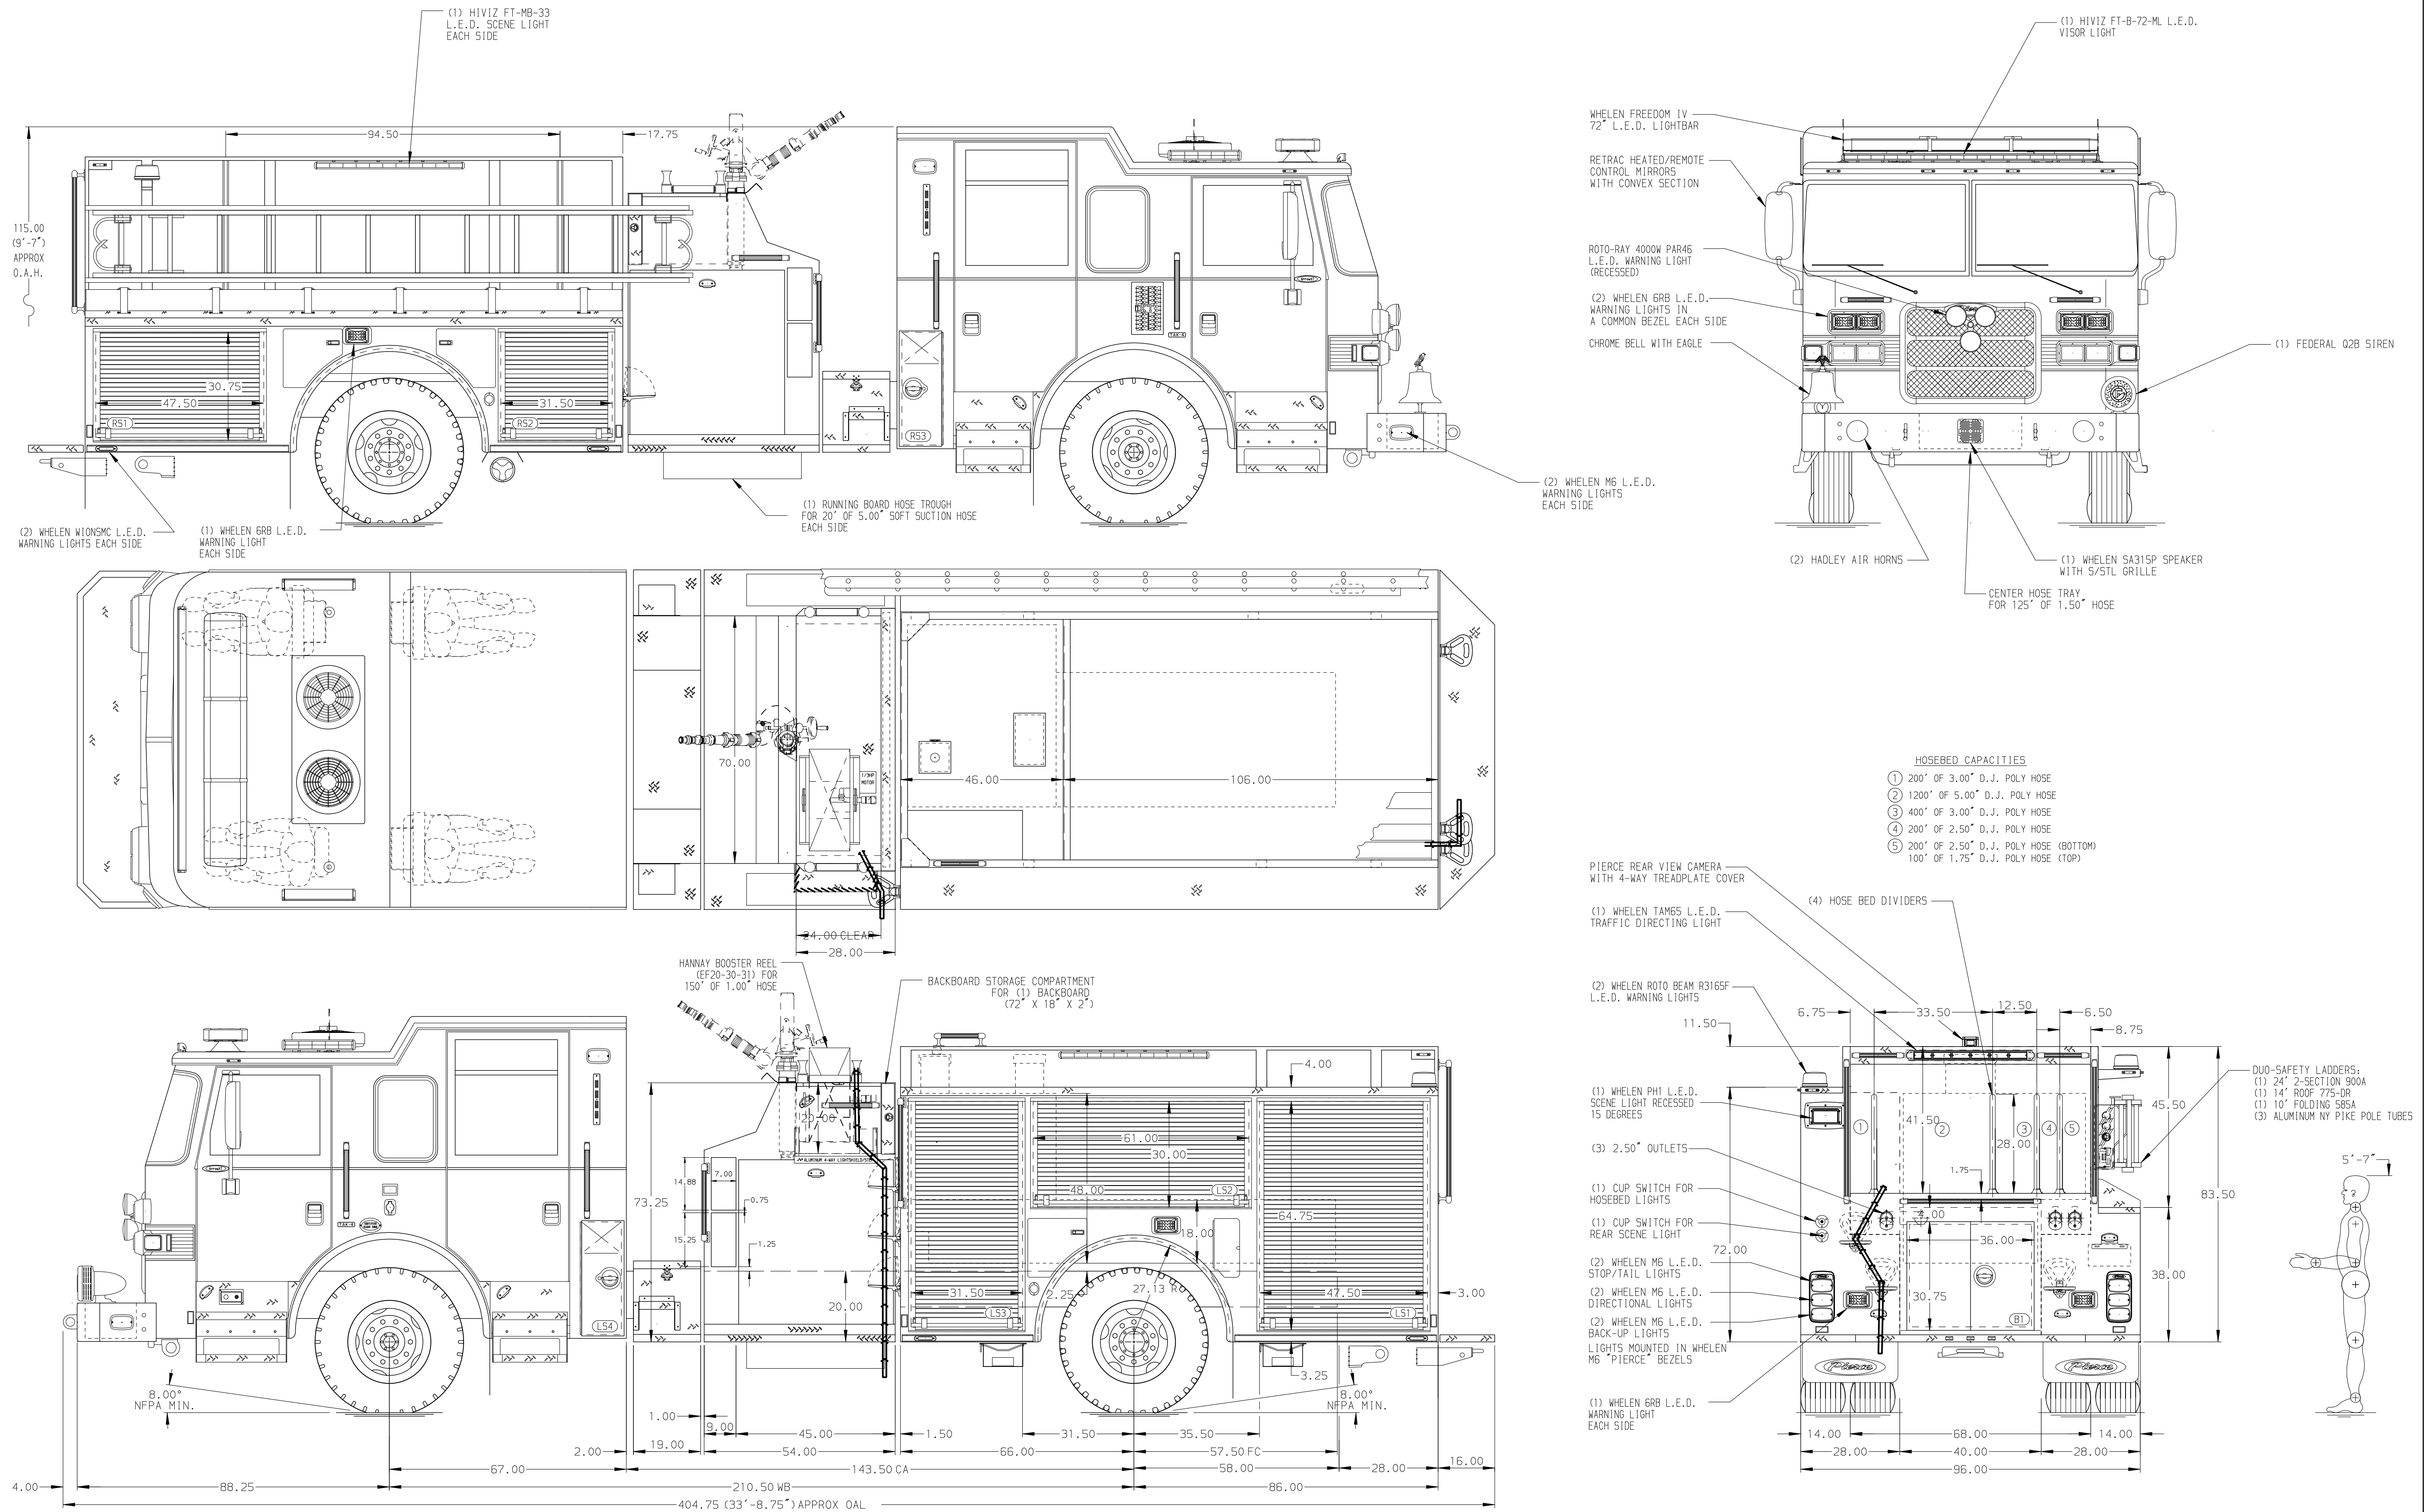

		<b>Pierce MANUFACTURING INC.</b>		JOB NO.	40213
				SCALE	DATE
				DRAWN BY	17JUL25
				CHECKED BY	18JUL25
				SHEET SIZE	SHEET NO.
				D	1 OF 1

CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
MAKE	FOR	Gainesville Fire Department
MODEL	DWG NO.	40213AD
ARROW XT	REV	