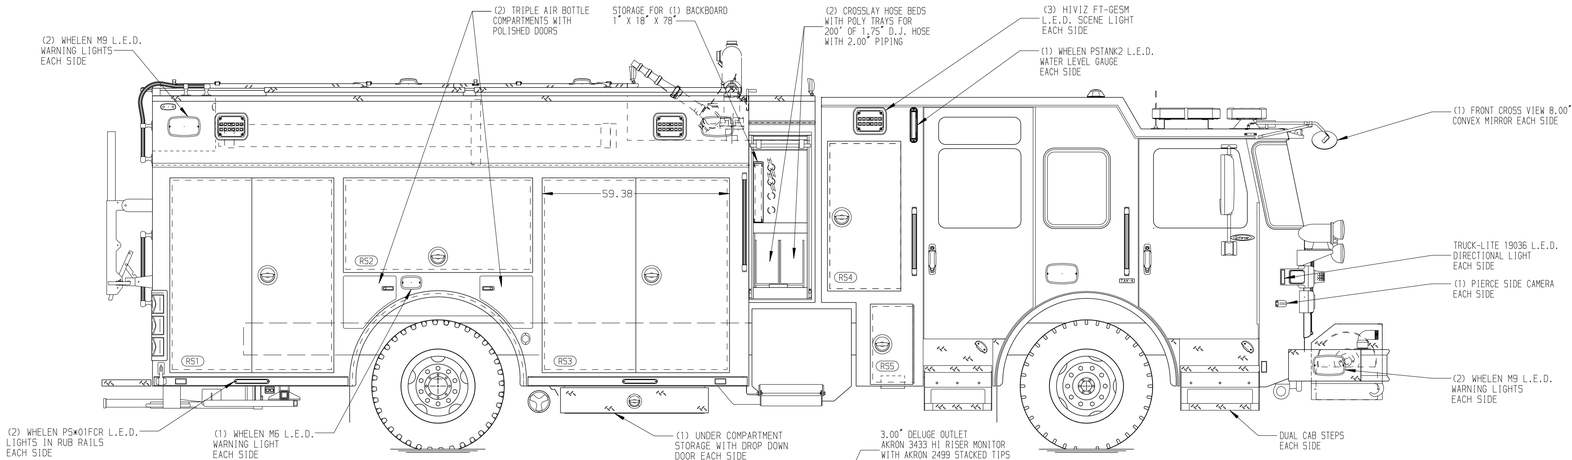

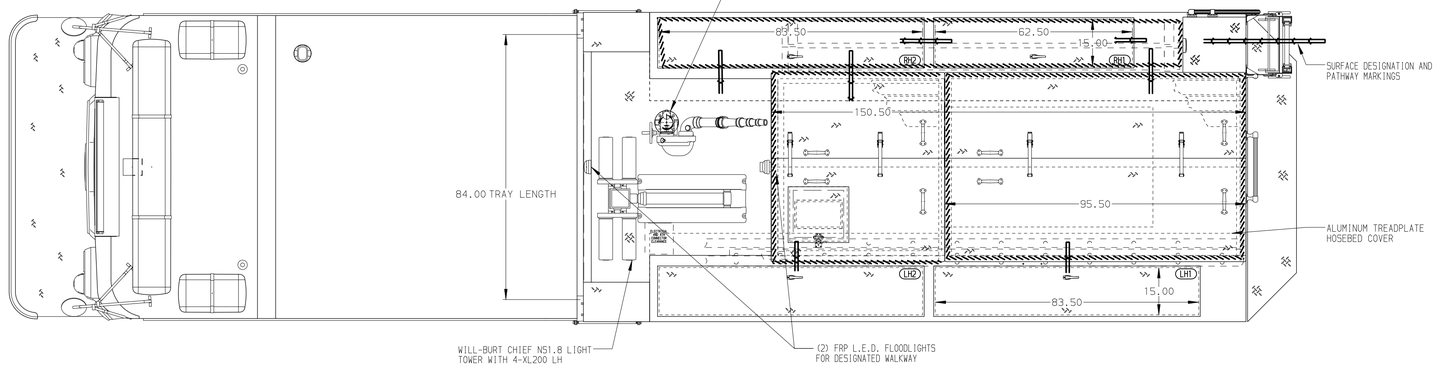

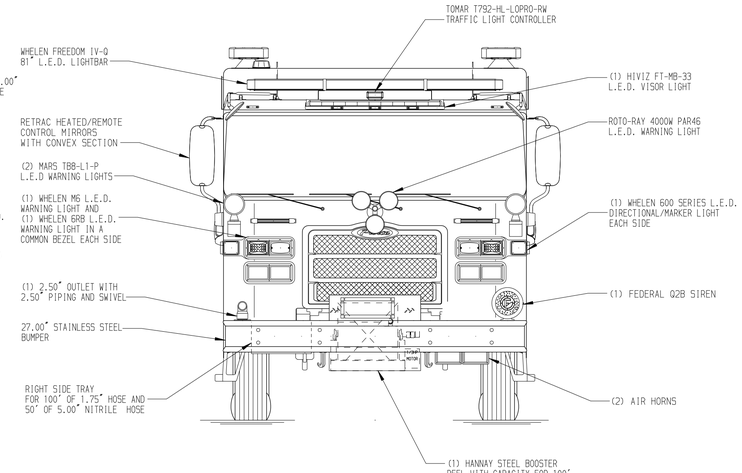

HOSEBED CAPACITIES

1. 800' OF 5.00" D.J. POLY HOSE
2. 400' OF 2.50" D.J. POLY HOSE (TOP)
   100' OF 1.75" D.J. POLY HOSE (BOTTOM)
3. 200' OF 2.25" D.J. POLY HOSE
4. 400' OF 2.50" D.J. POLY HOSE

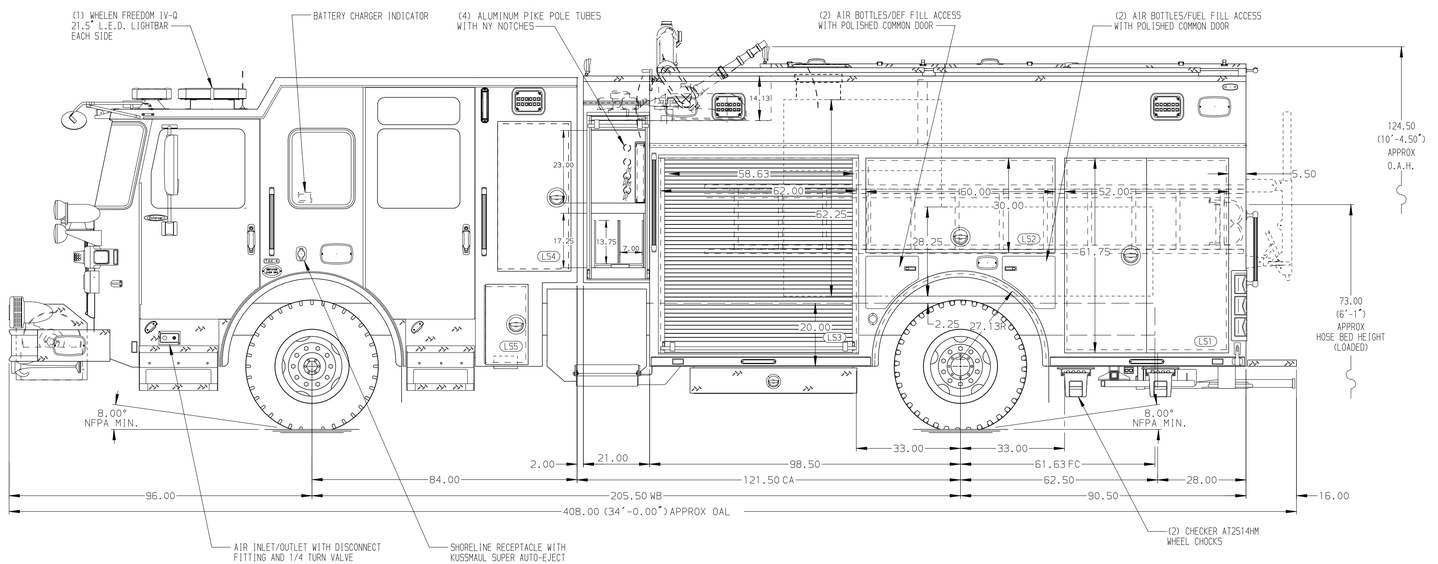

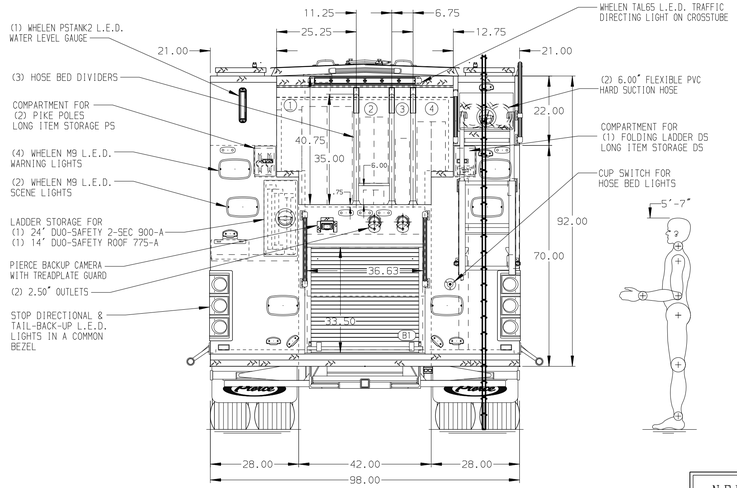

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. BATTERY CHARGE INDICATOR NOT REQUIRED
3. XANTREX FREEDOM X INVERTER LOCATED PER ORDER
4. HOT WATER HEATER LOCATED IN PUMP HOUSE
5. SIX 15/20A 120V RECEPTACLES LOCATED PER ORDER

REV	DATE	BY	CH	
5	14NOV25	BTH	SJS	CHASSIS DATA
4	13NOV25	BTH	SJS	
3	12NOV25	BTH	SJS	MAKE
2	130CT25	BTH	SJS	PIERCE
1	25JUL25	BTH	IPR	MODEL
				ENFORCER

NFPA 1900 (2024) COMPLIANT

PIERCE MANUFACTURING INC.

TITLE	1500GPM, 750G WATER TANK 189" PUMPER PUC, MUX	JOB NO.	40249
FOR	OTTAWA FIRE DEPARTMENT OTTAWA, ILLINOIS	SCALE	1:24
DWG NO.	40249AD	DATE	
		DRAWN BY	BTH 16JUL25
		CHECKED BY	IPR 17JUL25
		SHEET SIZE	D
		SHEET NO.	1 OF 1

View File Created 14-NOV-2025 09:20:00