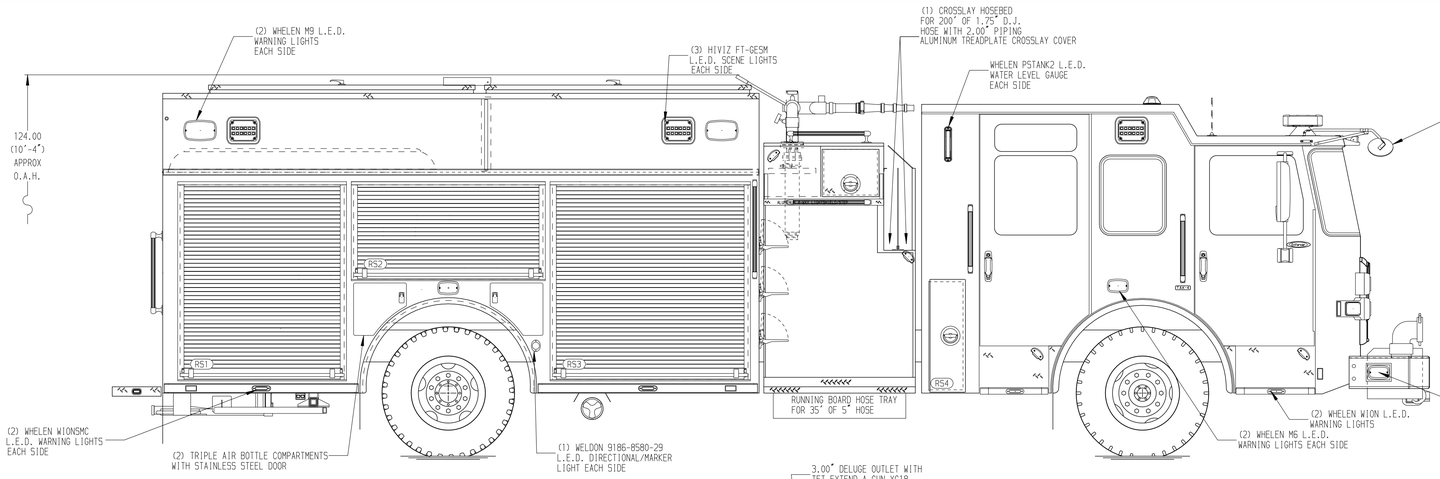

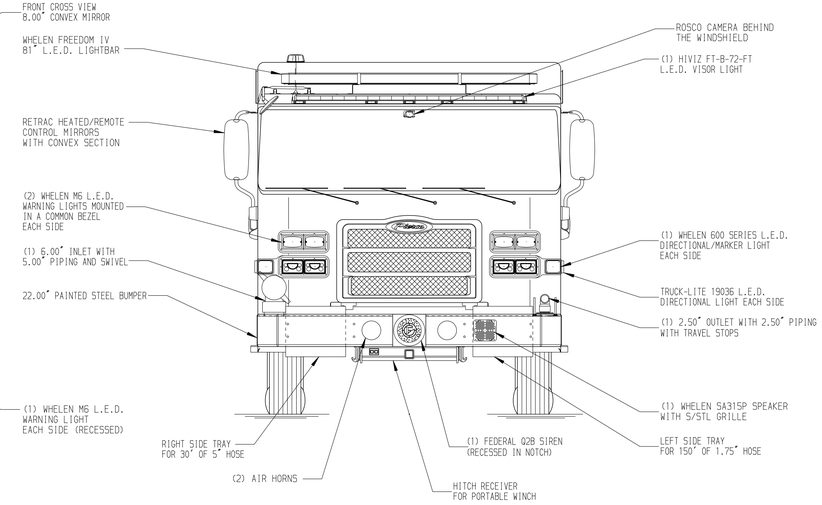

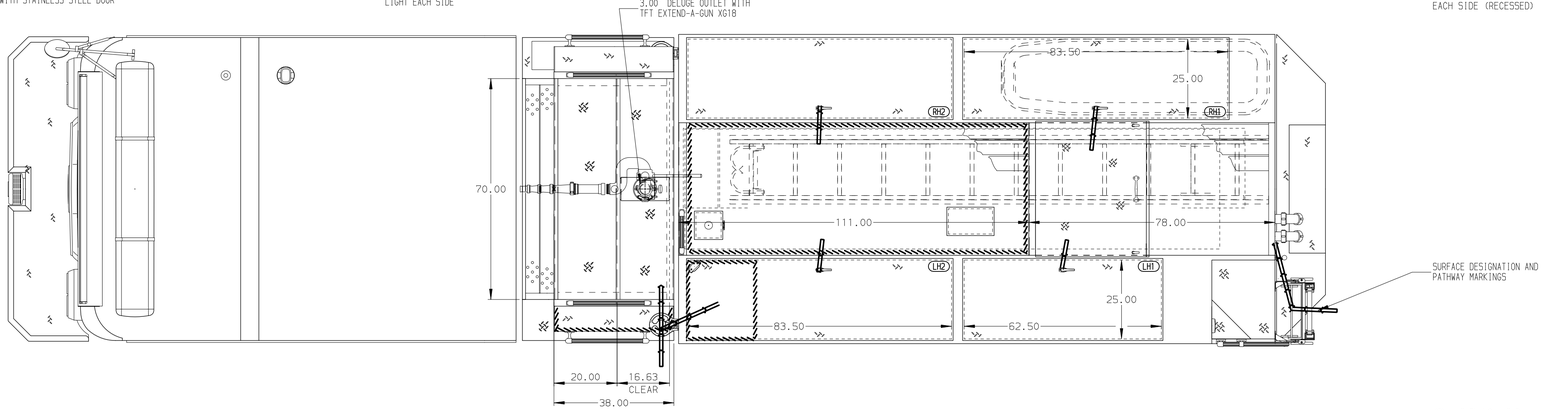

HOSEBED CAPACITIES

1. 300' OF 1.75" MERCEDES AQUA FLOW HOSE
2. 300' OF 2.50" MERCEDES AQUA FLOW HOSE
3. 300' OF 2.50" MERCEDES AQUA FLOW HOSE
4. 1100' OF 5.00" MERCEDES MEGA FLOW HOSE

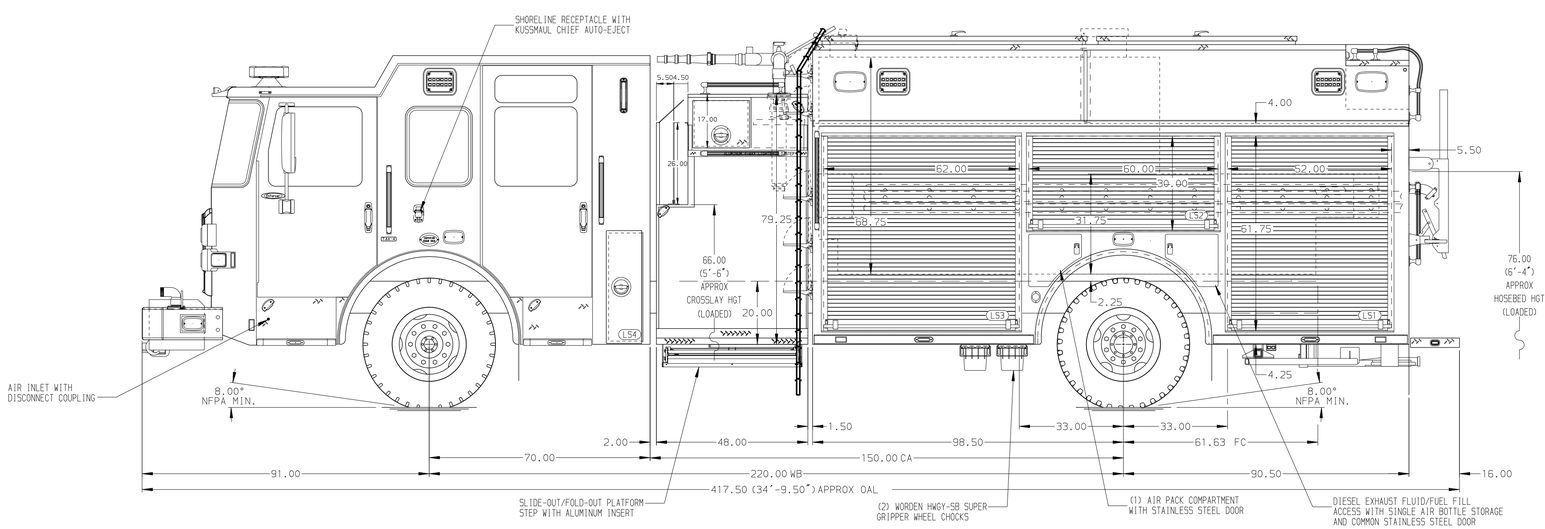

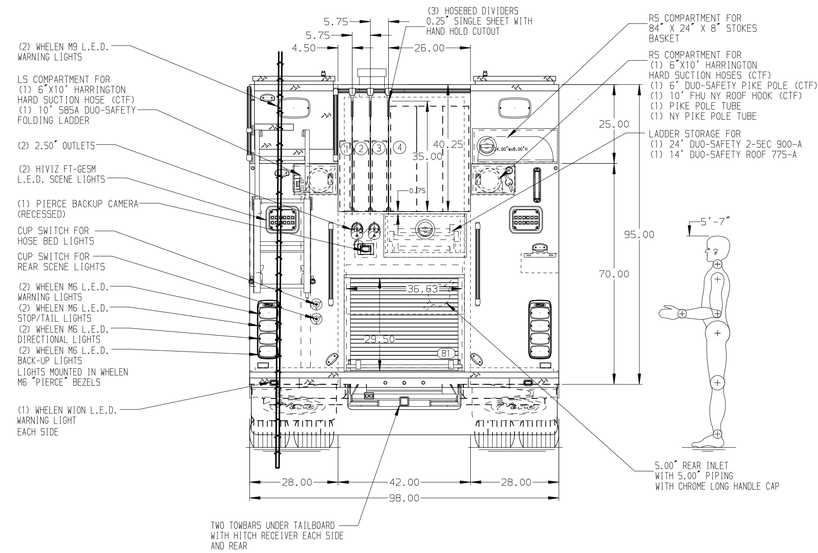

ALUMINUM BODY | MAXIMUM O.A.L. 418" | MAXIMUM O.A.H. 124" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
3. STAINLESS STEEL SCUFFPLATE ON BODY REAR CORNERS
4. AKRON EDUCTOR SINGLE AGENT FOAM SYSTEM

REV	DATE	BY	CH
V	27MAR26	JAM	COS
V	19DEC25	JAM	COS
V	24NOV25	JAM	COS
V	030CT25	JAM	CDU

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

PIERCE MANUFACTURING INC.

TITLE: 1750 GPM, 1020G TANK, 1000G WATER, 20G FOAM 189" HDRP, MUX
FOR: BARLOW VOLUNTEER FIRE COMPANY GETTYSBURG, PENNSYLVANIA
DWG NO. 40253AD-SH1

JOB NO.	40253
SCALE	DATE
1:24	
DRAWN BY	23SEP25
JAM	
CHECKED BY	22SEP25
CDU	
SHEET SIZE	SHEET NO.
D	1 OF 2

View File Created 27-MAR-2026 10:20:21