

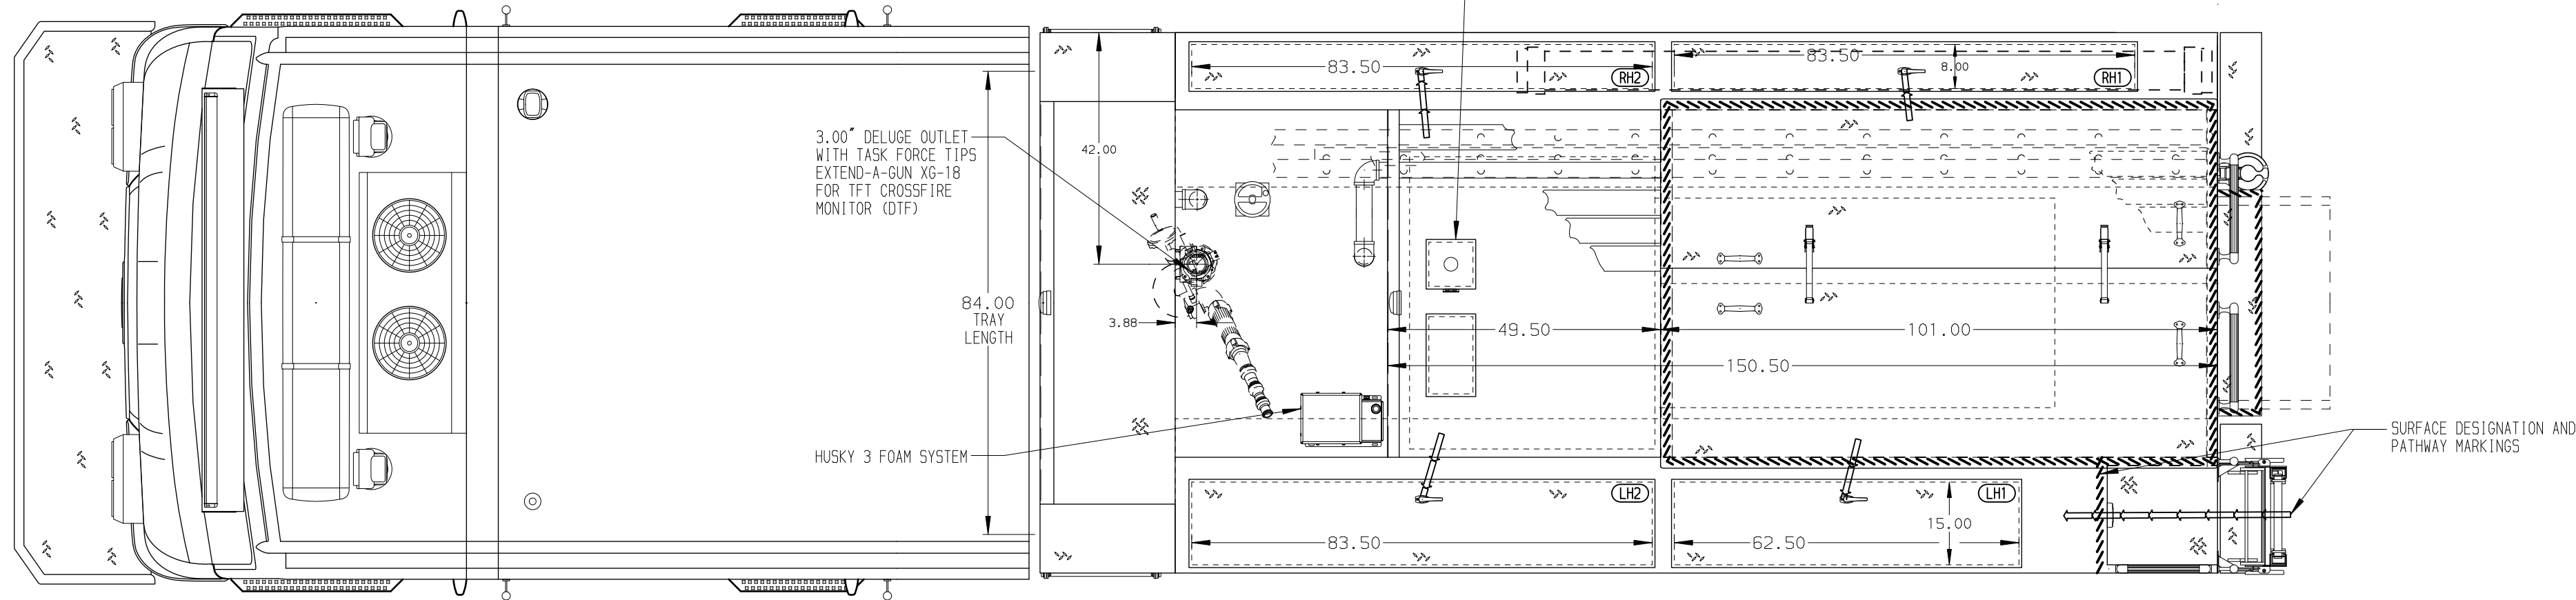
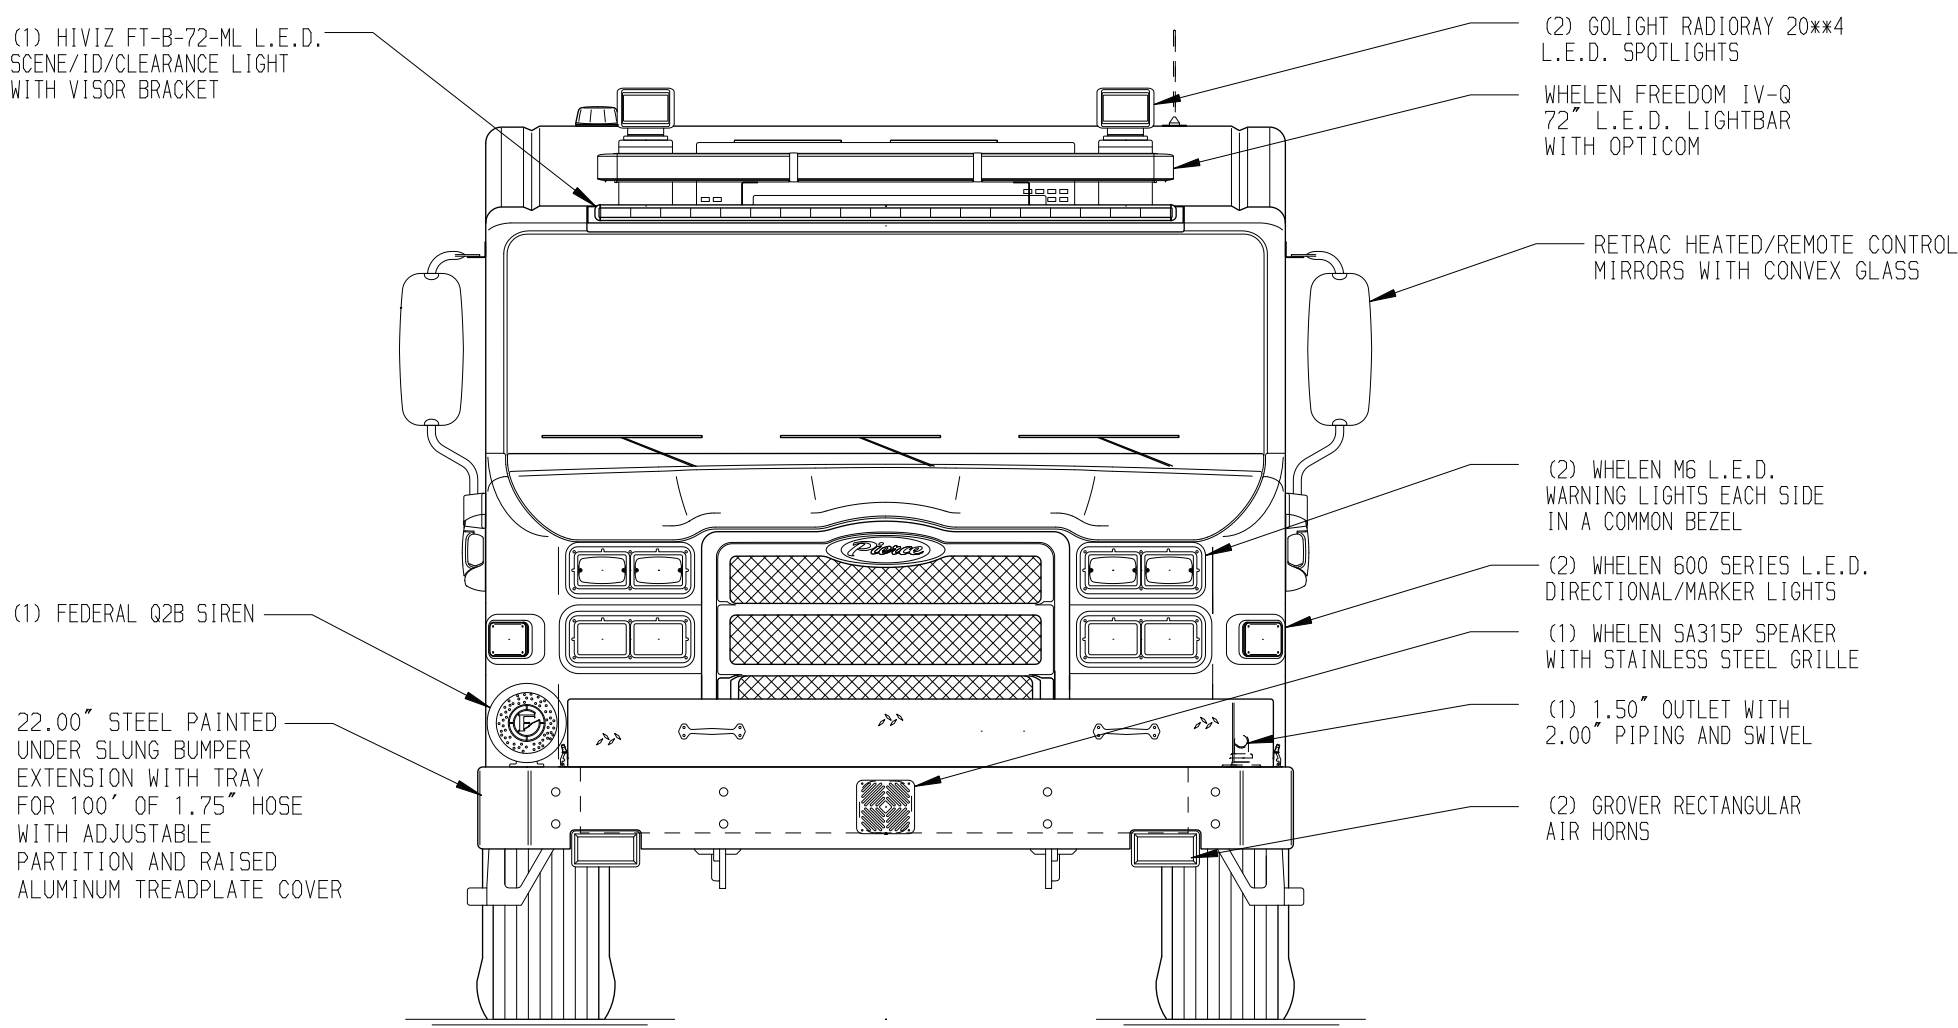
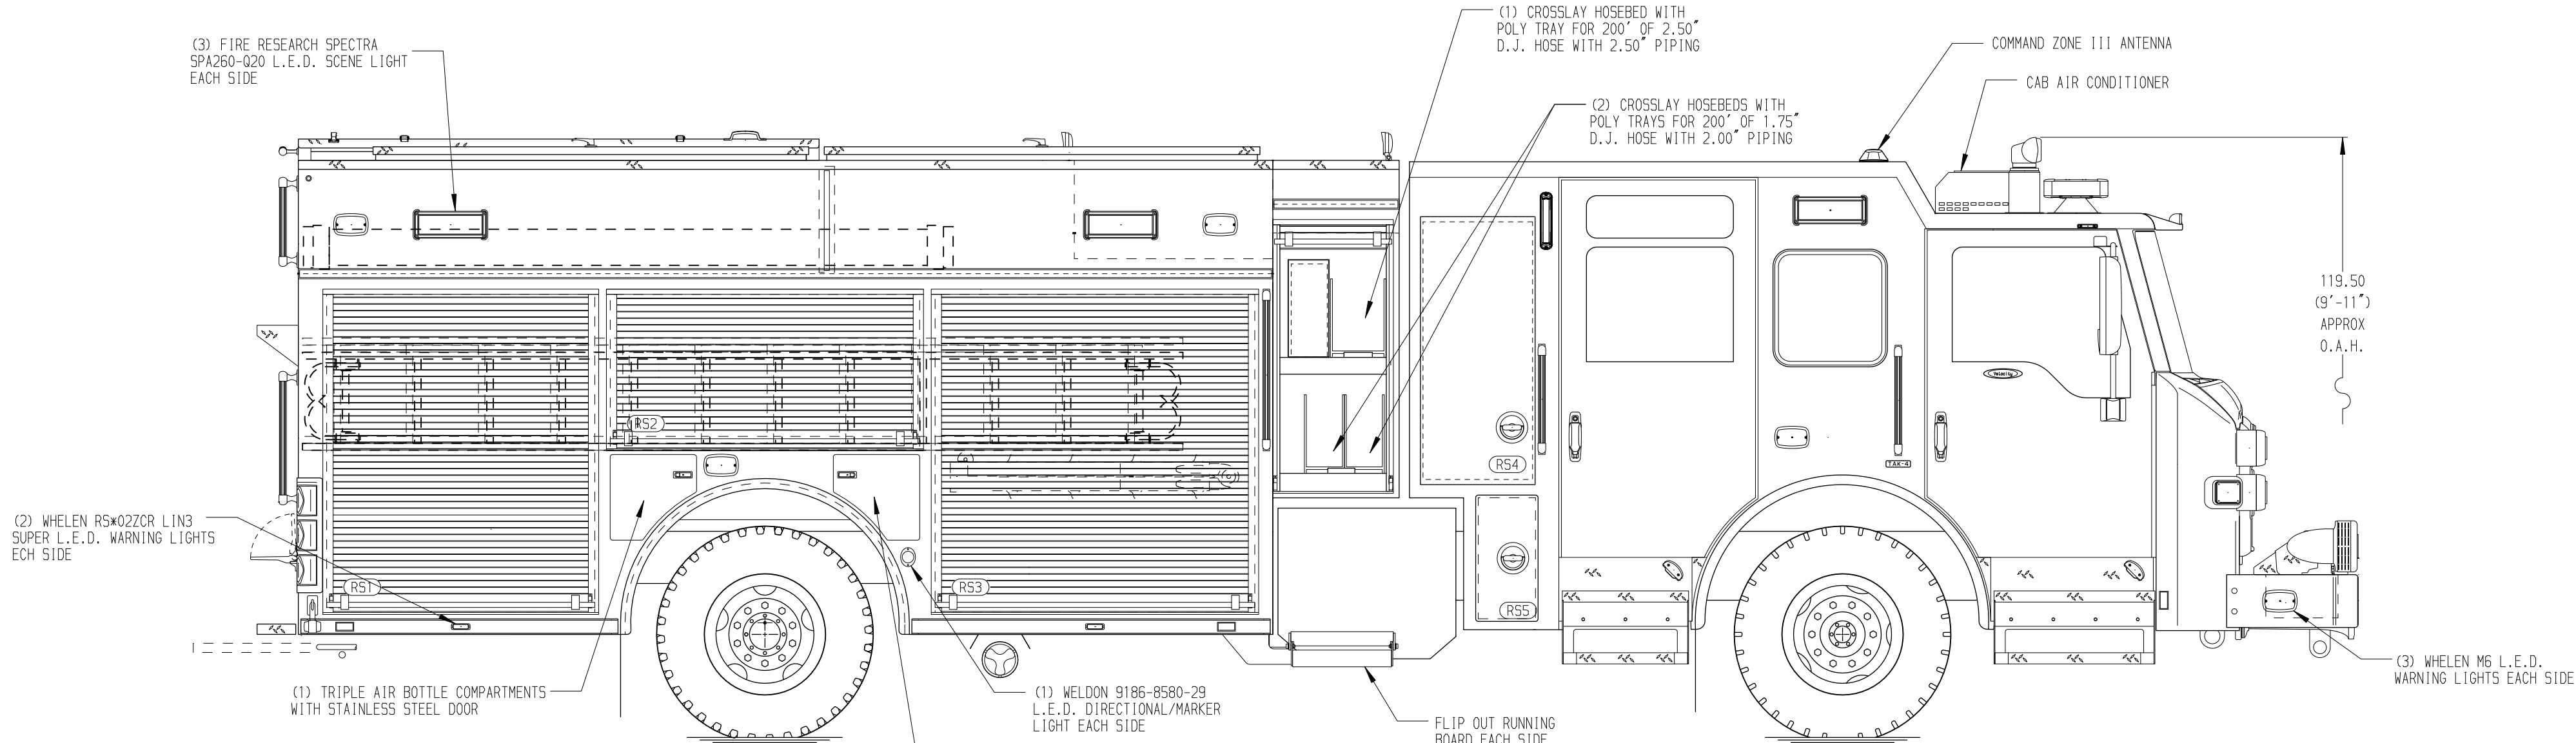


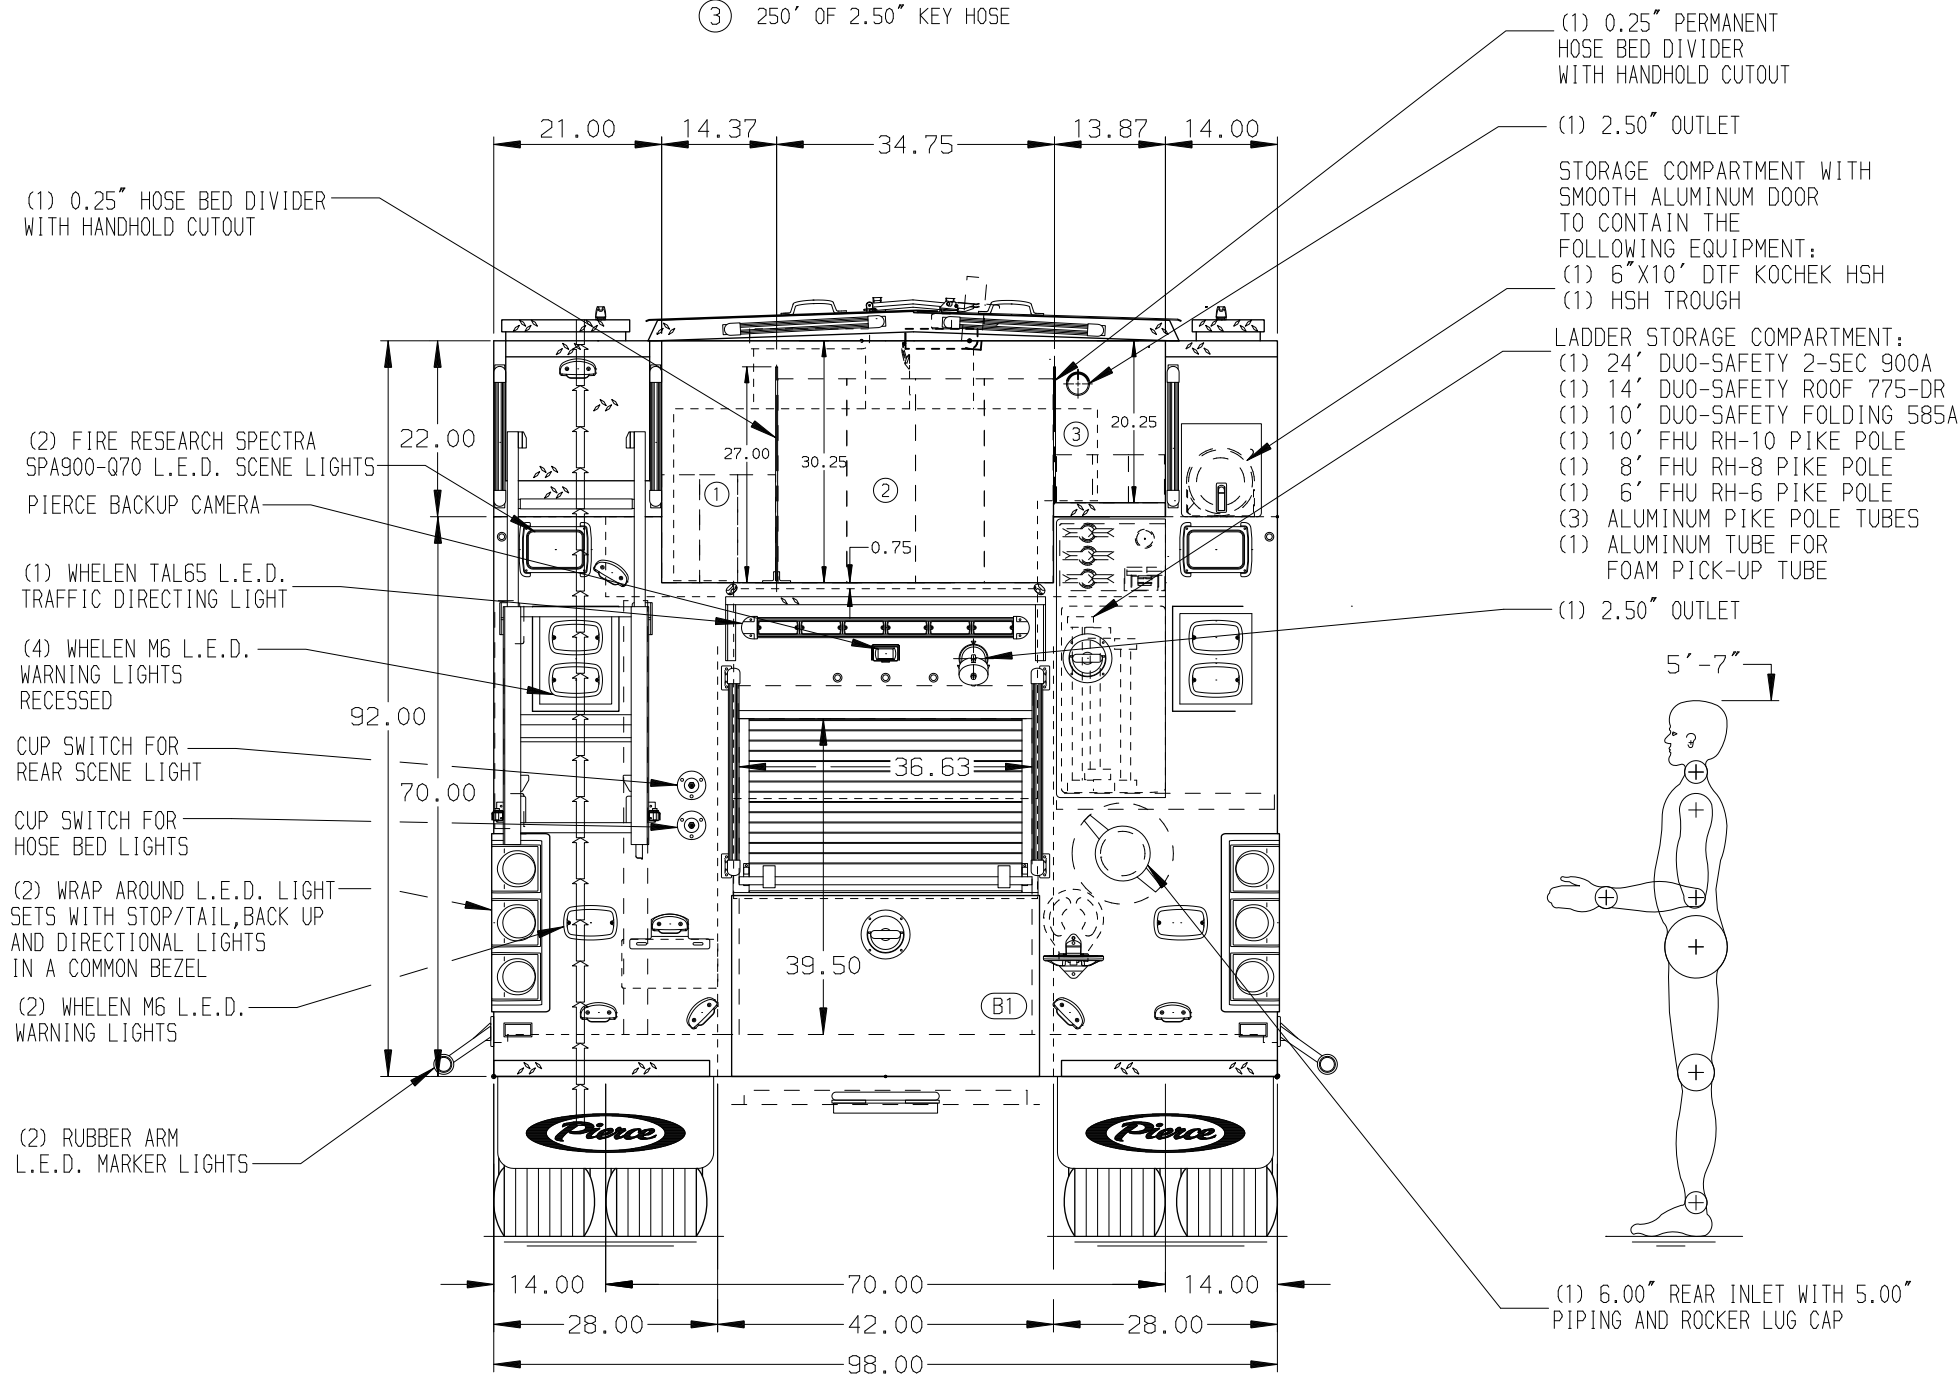

- HOSEBED CAPACITIES
- ① 600' OF 2.50" KEY HOSE
 - ② 1000' OF 5.00" KEY HOSE
 - ③ 250' OF 2.50" KEY HOSE

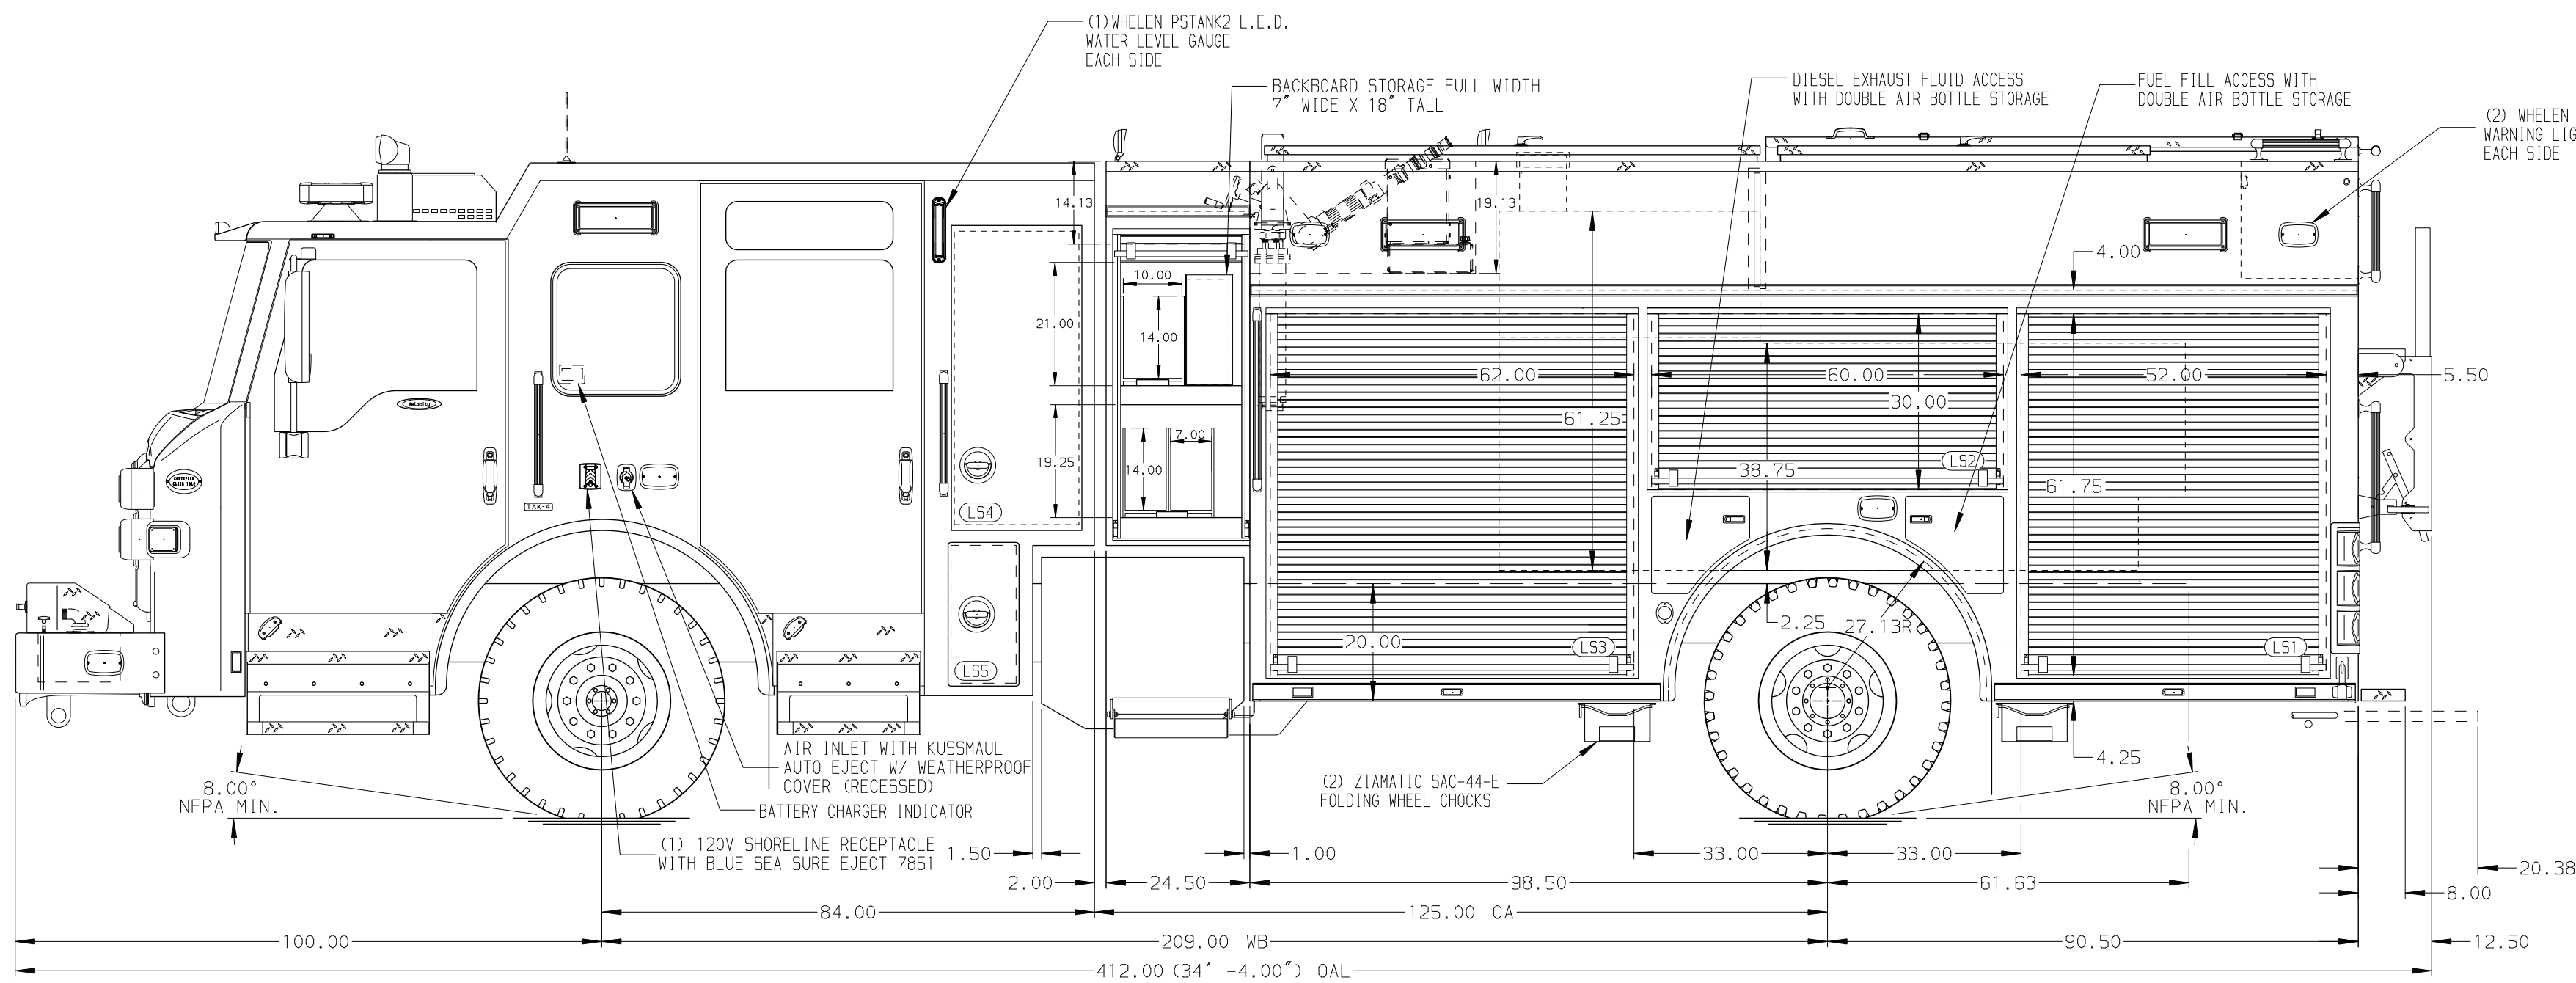

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 2. CENTRALIZED LUBE POINTS, ZERK FITTING, FRONT, TAK-4 SUSPENSION ONLY
- 3. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON DS PUMP PANEL
- 4. THREE DRAWER CTECH CABINET LOCATED IN COMPARTMENT L53
- 5. LITTLE GIANT LADDER LOCATED IN RS3 ON INVERTED SHELF
- 6. INVERTER LOCATED IN COMPARTMENT L53

				CHASSIS DATA	TITLE	1500 GPM, 780G TANK, 750G WATER, 30 FOAM 189" PUC RESCUE, MUX	JOB NO.	40256
				MAKE			SCALE	DATE
				PIERCE	FOR	BRIGHTON FIRE RESCUE DISTRICT BRIGHTON, COLORADO	DRAWN BY	080CT25
				MODEL			CHECKED BY	80CT25
REV	DATE	BY	CH	VELOCITY FR	DWG NO.	40256AD	SHEET SIZE	SHEET NO.
							D	1 OF 1