

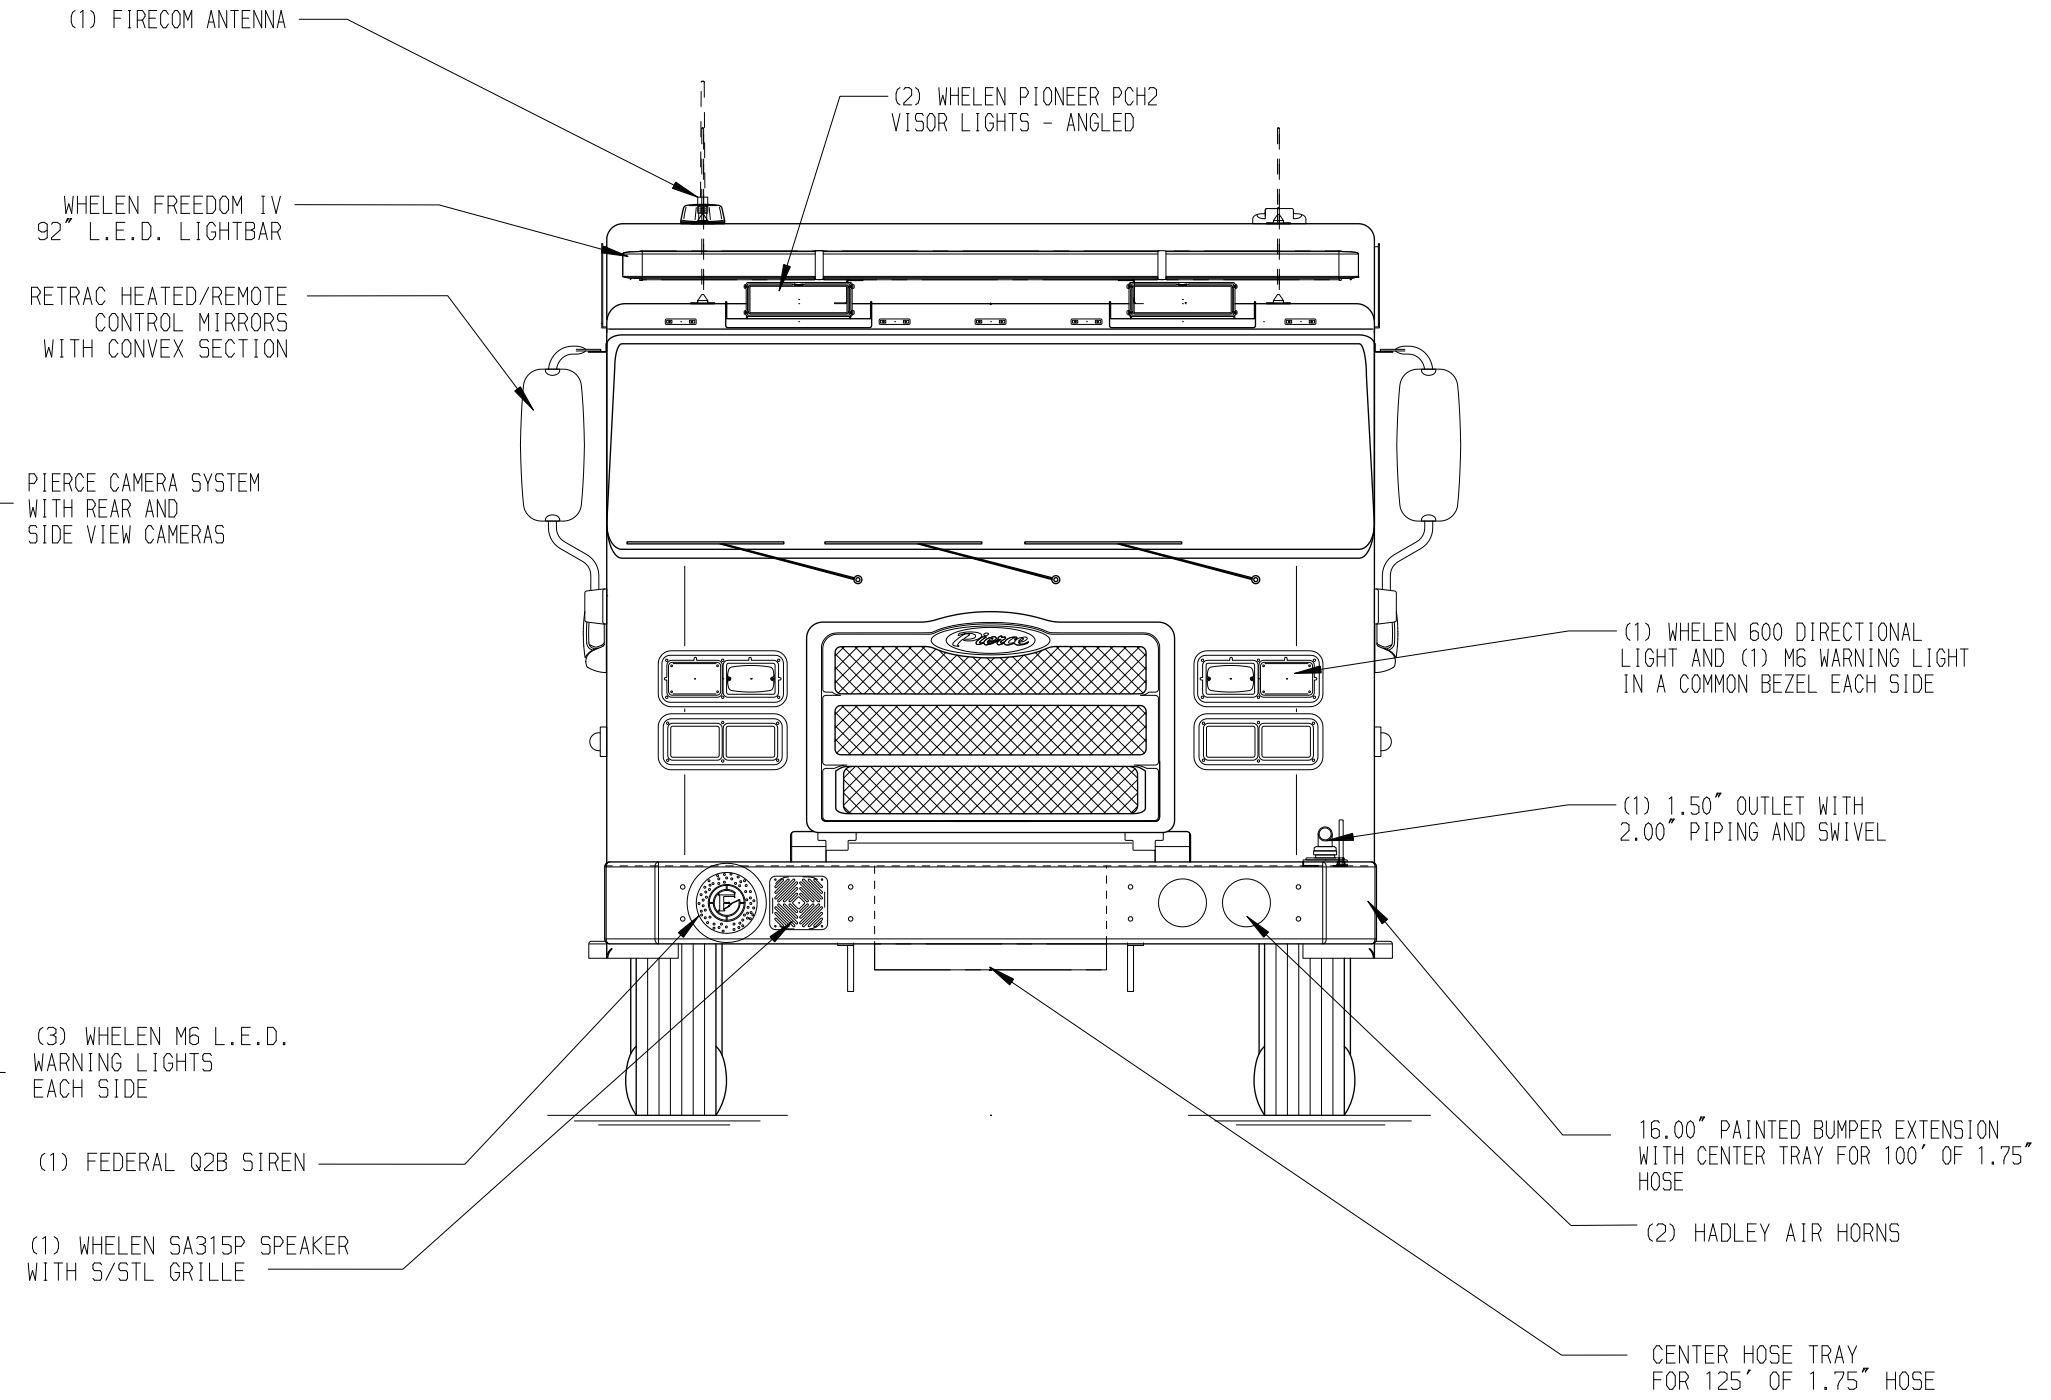


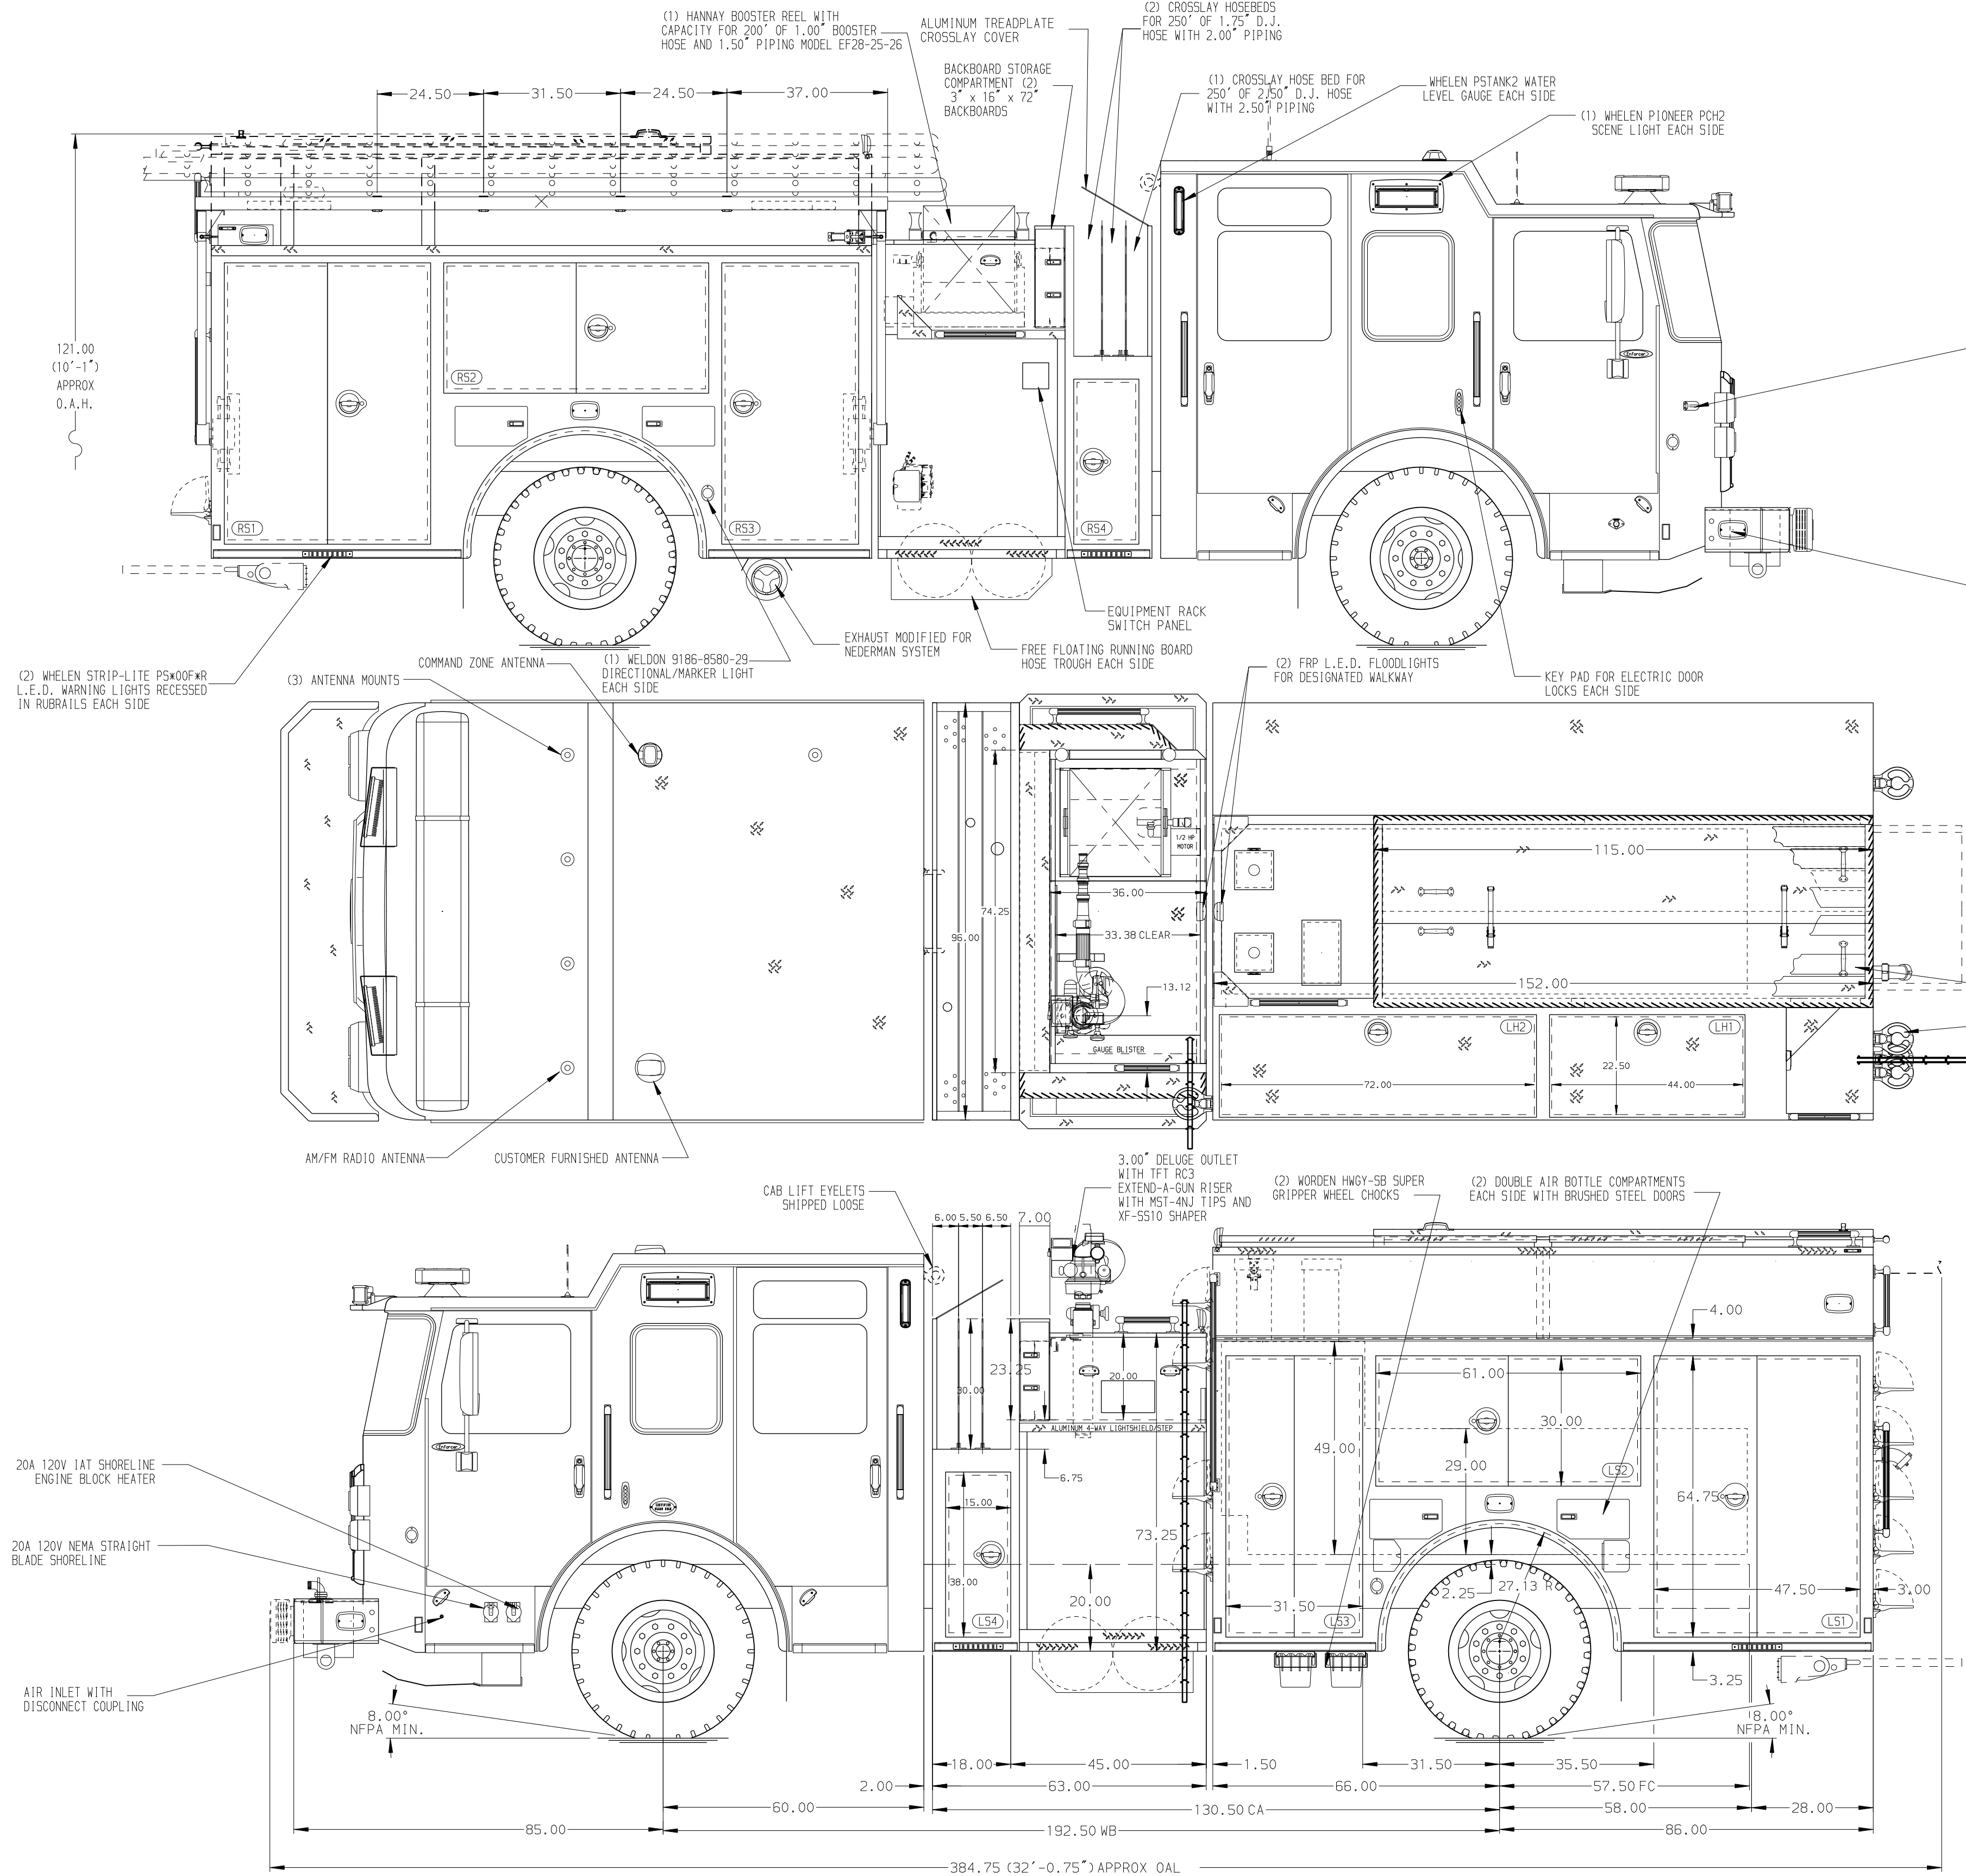

- HOSEBED CAPACITIES
- ① 600' OF 3.00 POLY HOSE
 - ② 200' OF 1.75" D.J. POLY HOSE
 - ③ 700' OF 5.00" D.J. POLY HOSE

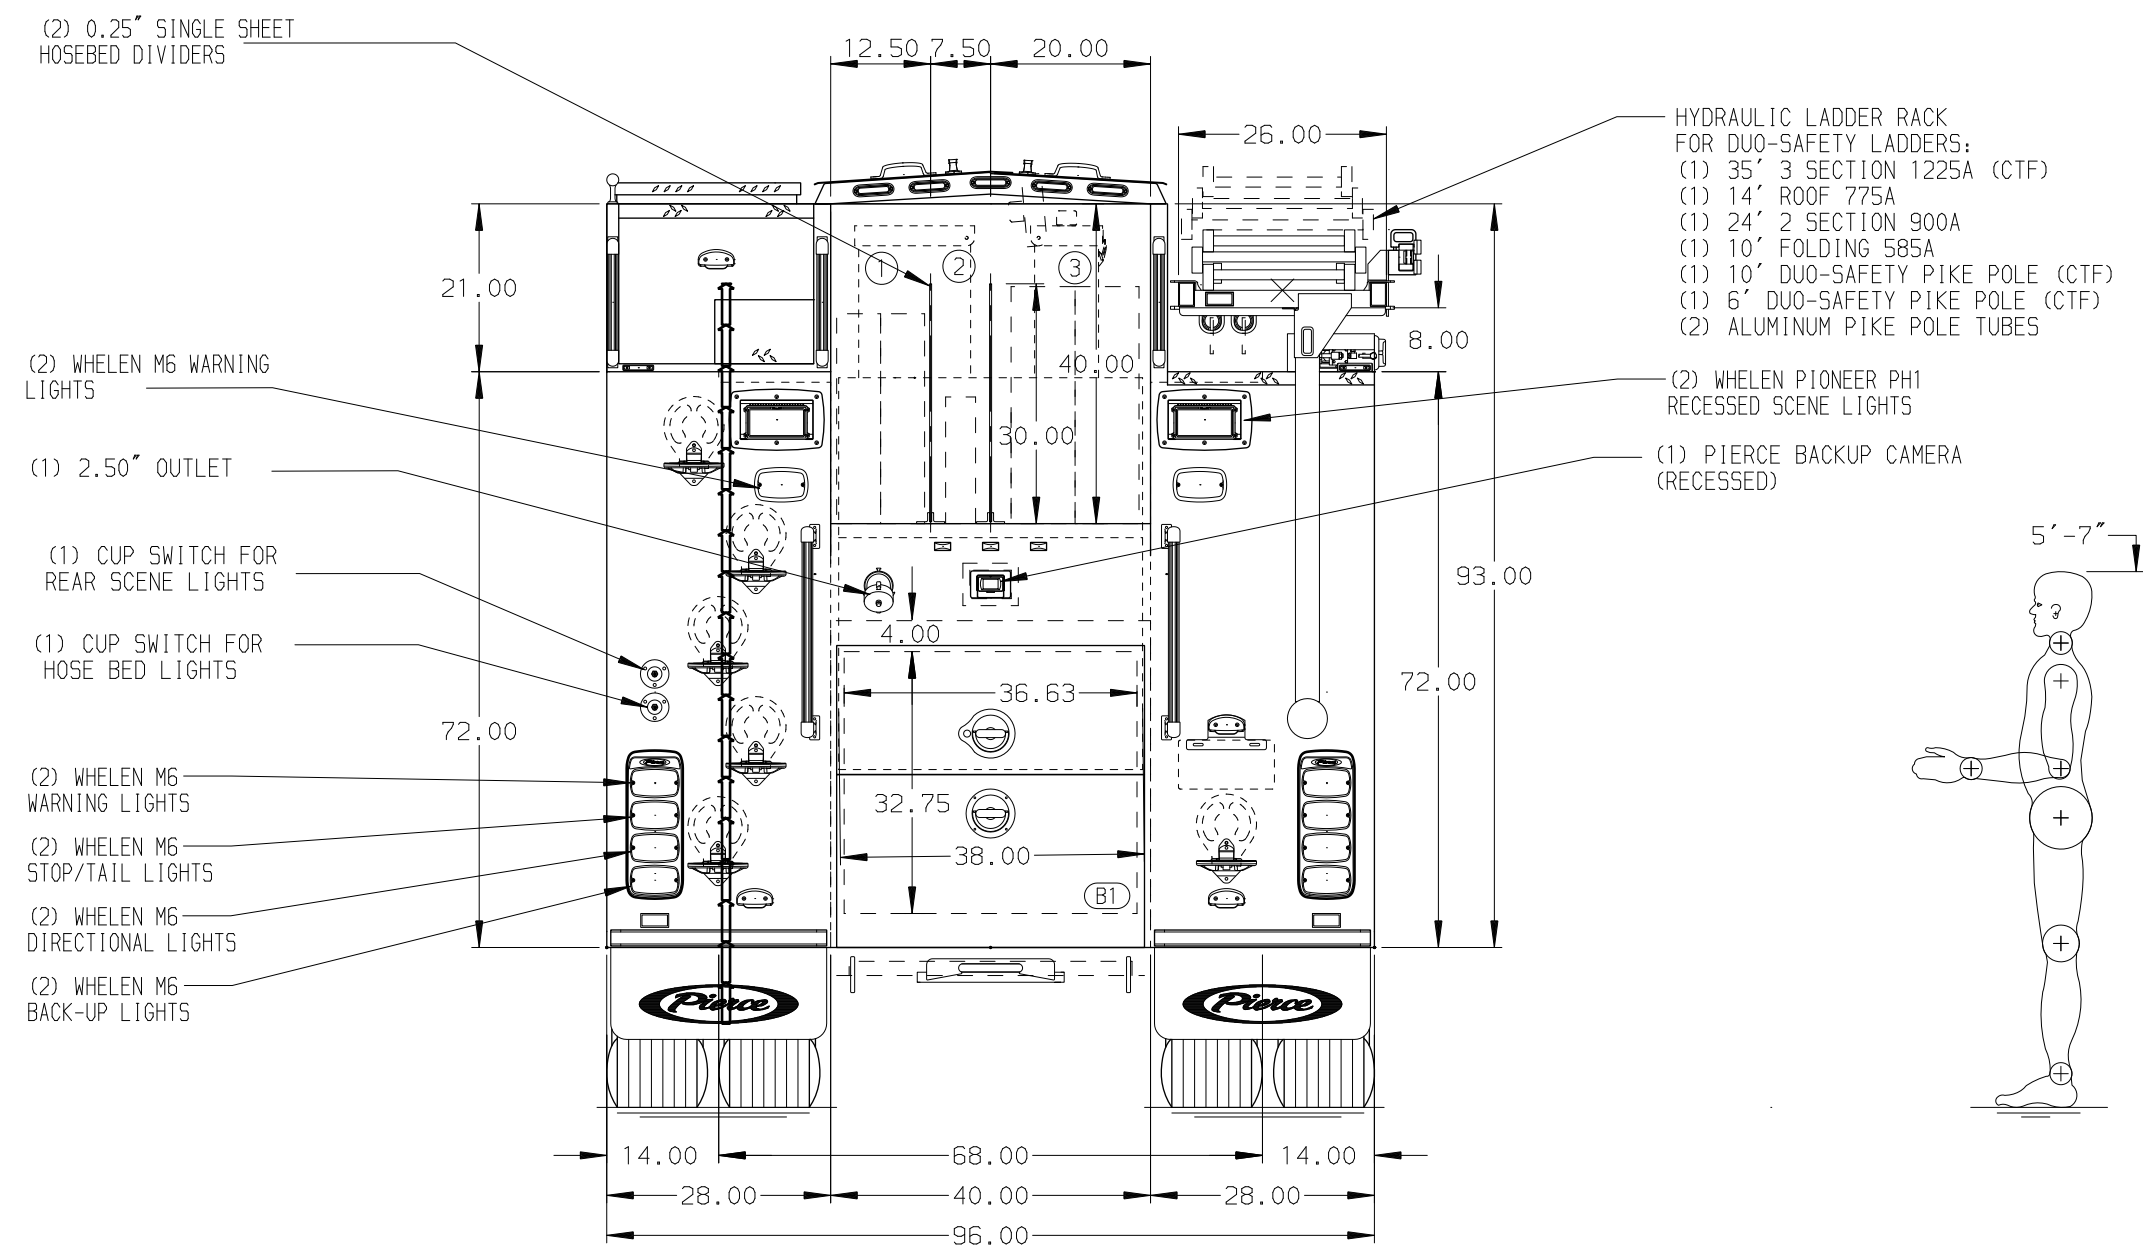

ALUMINUM BODY

MAXIMUM O.A.H. 121.00"

MAXIMUM O.A.L. 394.00"

REF TRUCK: 39859

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
2. FOAM PRO 2002 DUAL AGENT FOAM SYSTEM PUMP LOCATED PER SHOP ORDER

REV	DATE	BY	CH	ENFORCER
02FEB26	KSK	GKH		
26JAN26	MPM	GKH		
04DEC25	KSK	GKH		

		JOB NO.	40258 01-04
MANUFACTURING INC.		SCALE	DATE
		1:24	
		DRAWN BY	27AUG25
		KSK	
		CHECKED BY	60CT25
		KLH	
		SHEET SIZE	SHEET NO.
		D	1 OF 1

TITLE 1500 GPM, 555 TANK, 500G WATER, 55 GAL FOAM
152" 2G PUMPER, MUX
FOR SPOKANE VALLEY FIRE DEPARTMENT
SPOKANE VALLEY, WASHINGTON
DWG NO. 40258AD