


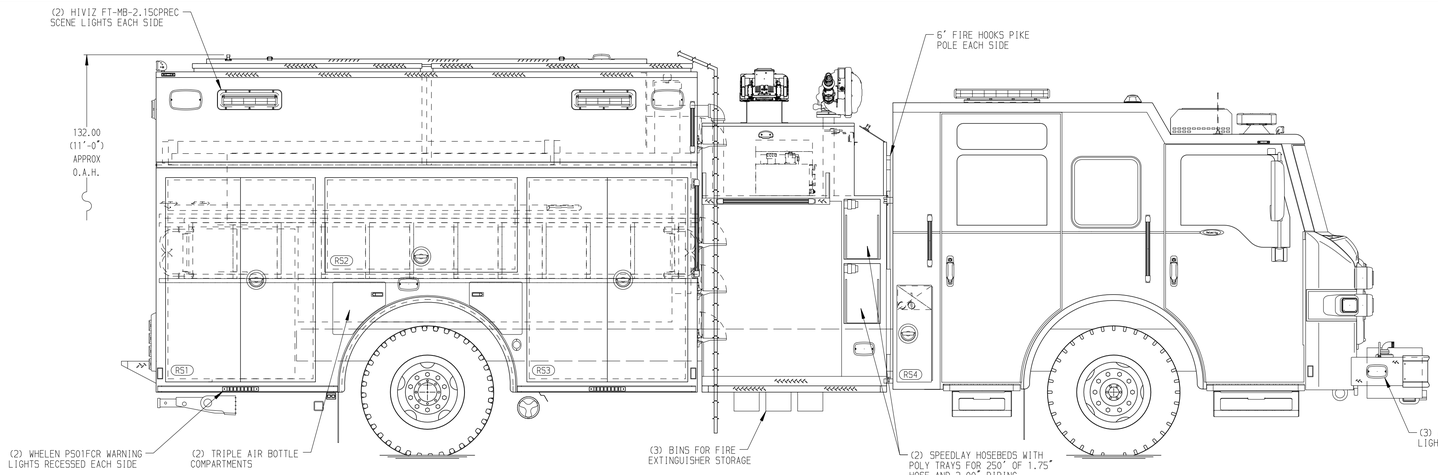


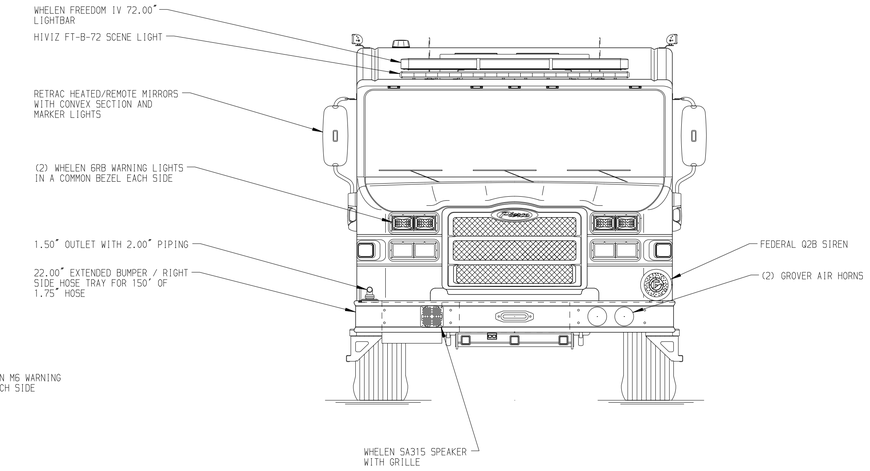

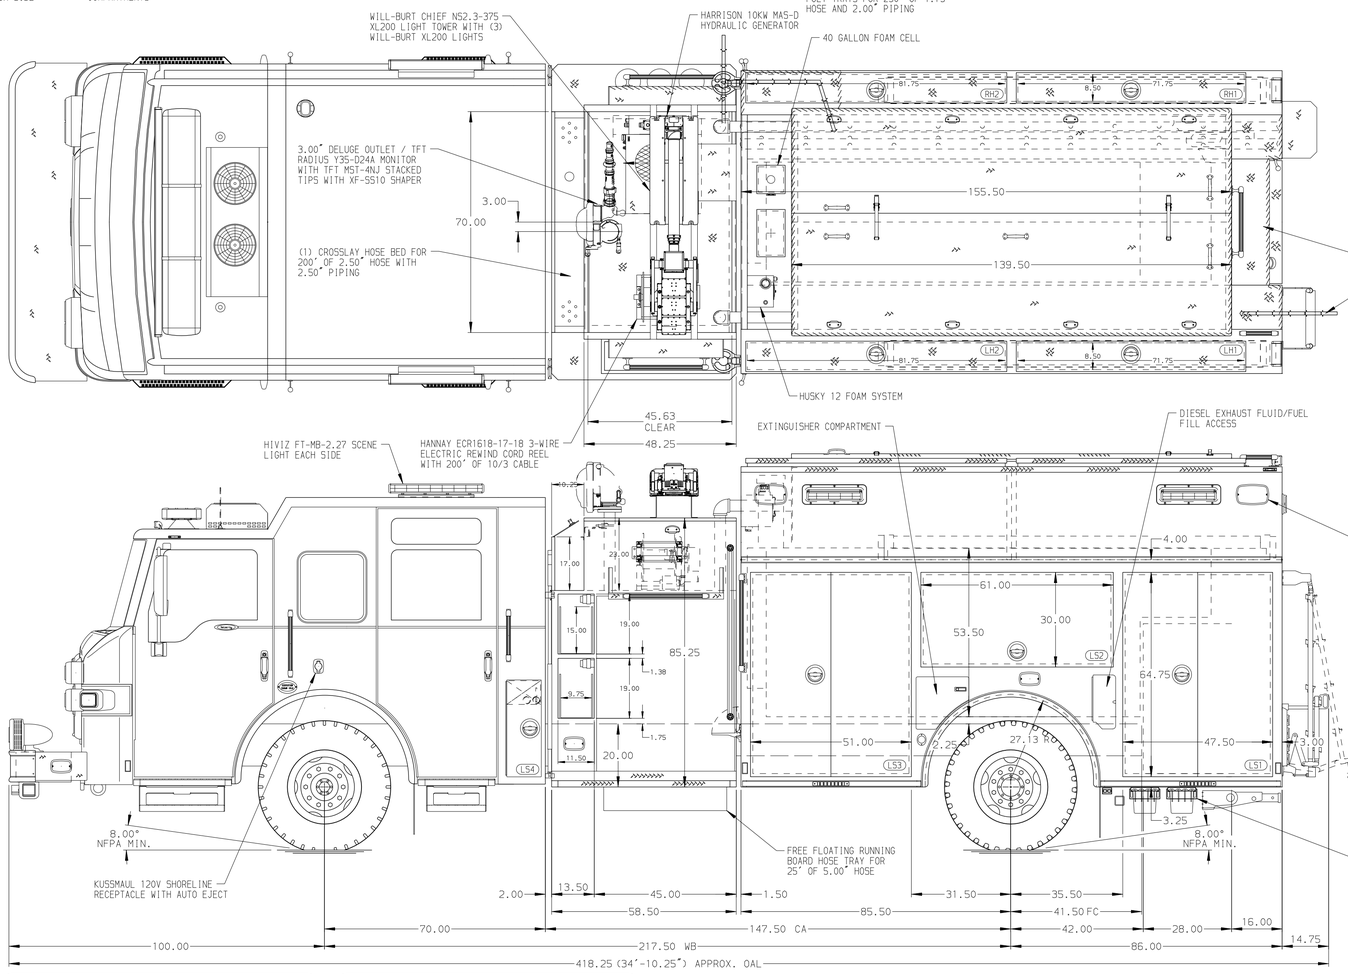

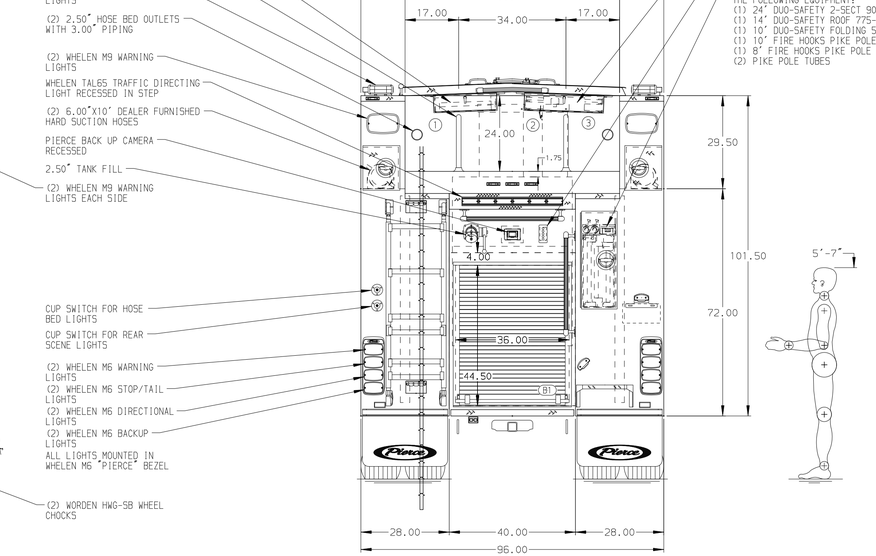

HOSEBED CAPACITIES

1. 500' OF 3.00" D.J. POLY HOSE (PRE-CONNECTED)
2. 1000' OF 5.00" D.J. POLY HOSE
3. 500' OF 3.00" D.J. POLY HOSE (PRE-CONNECTED)

ALUMINUM BODY | MAXIMUM O.A.L. 418.25" | TARGET O.A.H. 127.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED PER ORDER
2. BATTERY CHARGER INDICATOR LOCATED PER ORDER
3. TWO ADDITIONAL POLY TRAYS SHIPPED LOOSE
4. TWO RECEPTACLE BOXES WITH (4) RECEPTACLES IN CAB LOCATED PER ORDER
5. ONE 120V DUPLEX RECEPTACLE LOCATED IN CAB PER ORDER

REV	DATE	BY	CH
3	13MAR26	BST	TDC
2	10FEB26	BST	TDC
1	14NOV25	CDU	CDU

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY

Pierce MANUFACTURING INC.

TITLE: 1500GPM, 1000G TANK, 960G WATER, 40G FOAM CELL
171" PUMPER BODY, HARD WIRED

FOR: ROANOKE ISLAND VOLUNTEER FIRE DEPARTMENT
MANTEO, NORTH CAROLINA

DWG NO. 40283AD-SH1

JOB NO.	40283
SCALE	1:24
DATE	
DRAWN BY	BST 10NOV25
CHECKED BY	CDU 10NOV25
SHEET SIZE	D
SHEET NO.	1 OF 2

View File Created 17-MAR-2026 12:33:58