

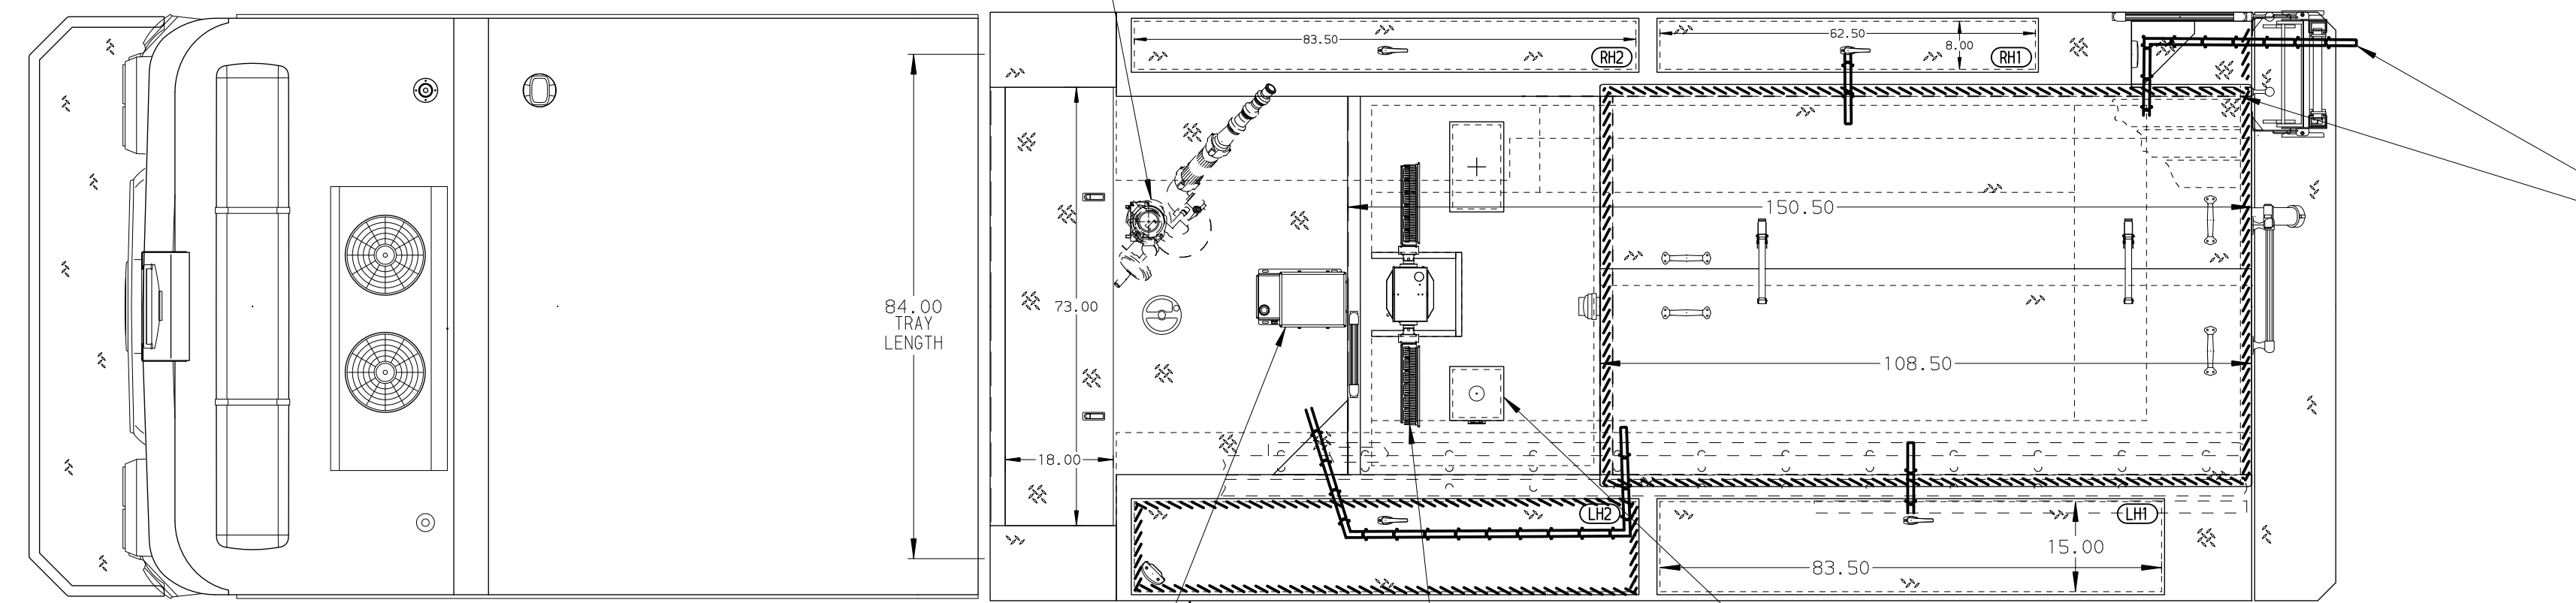
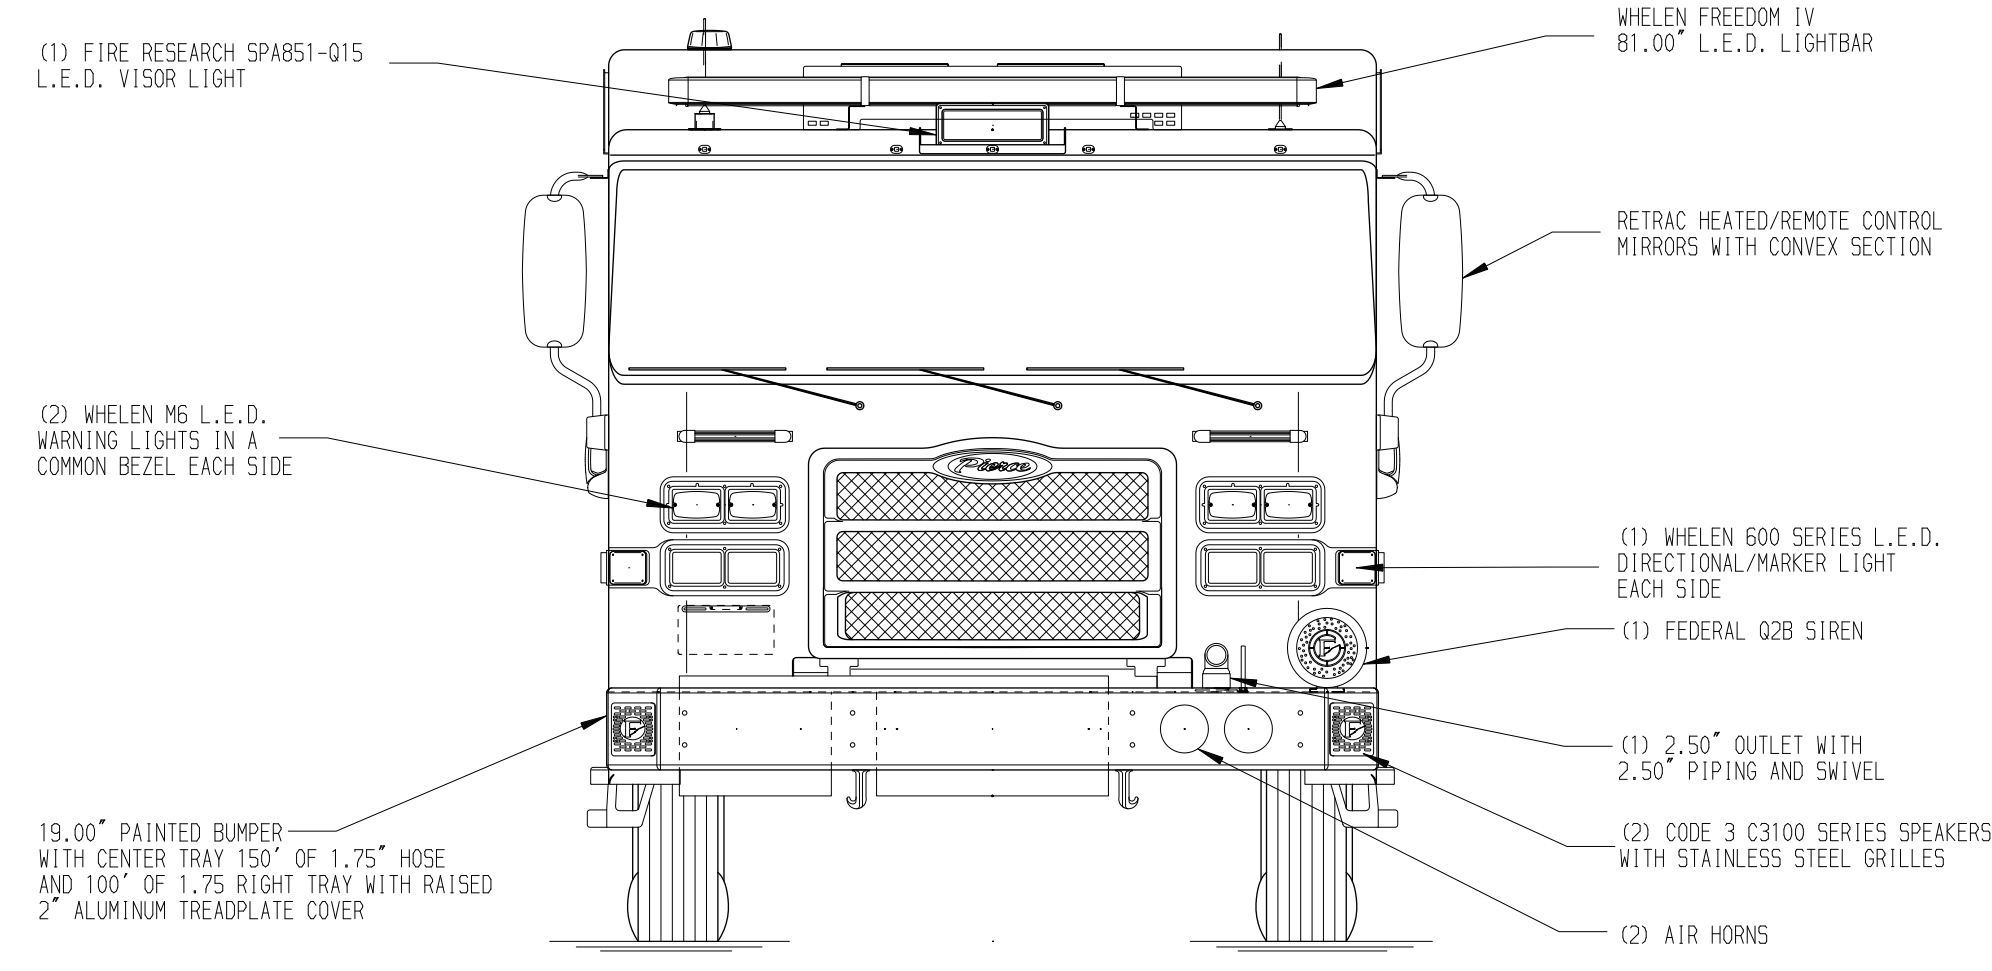
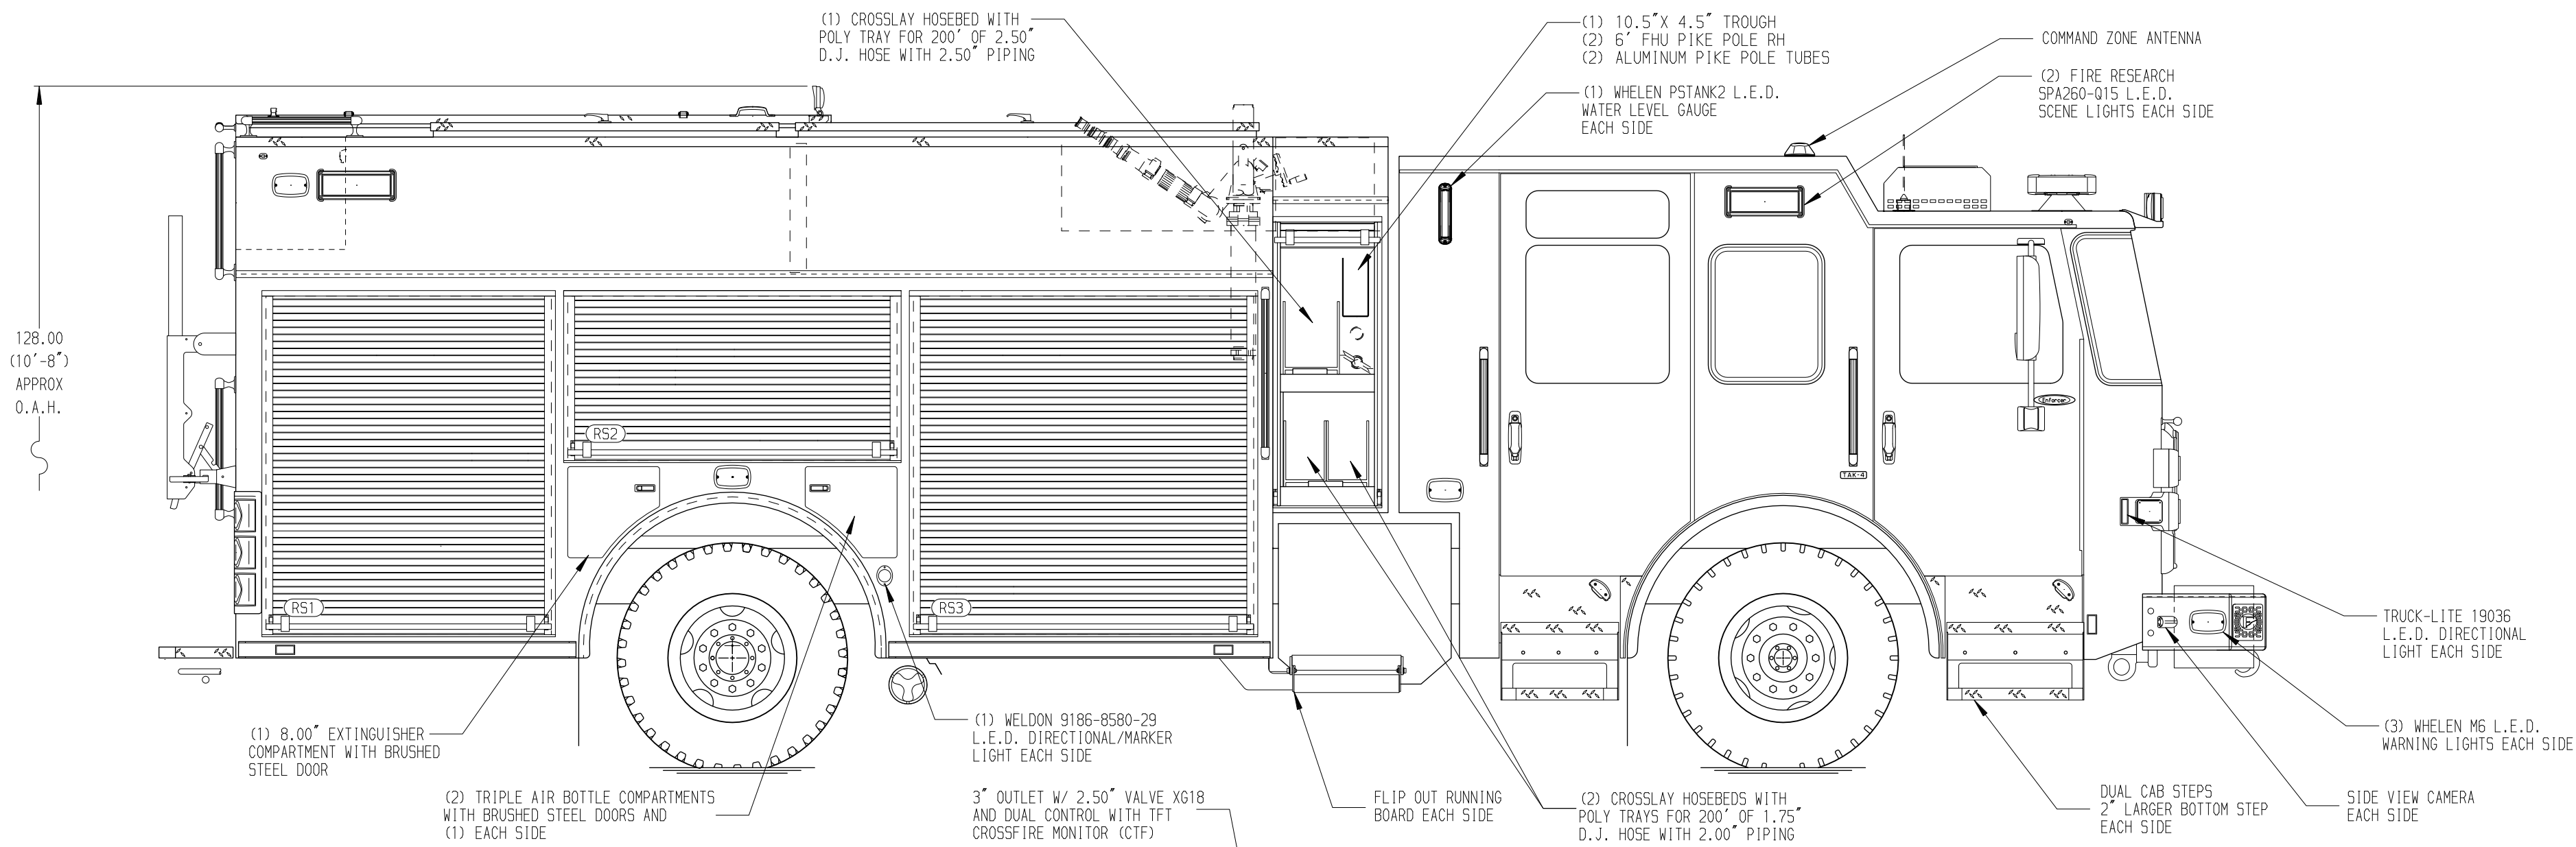


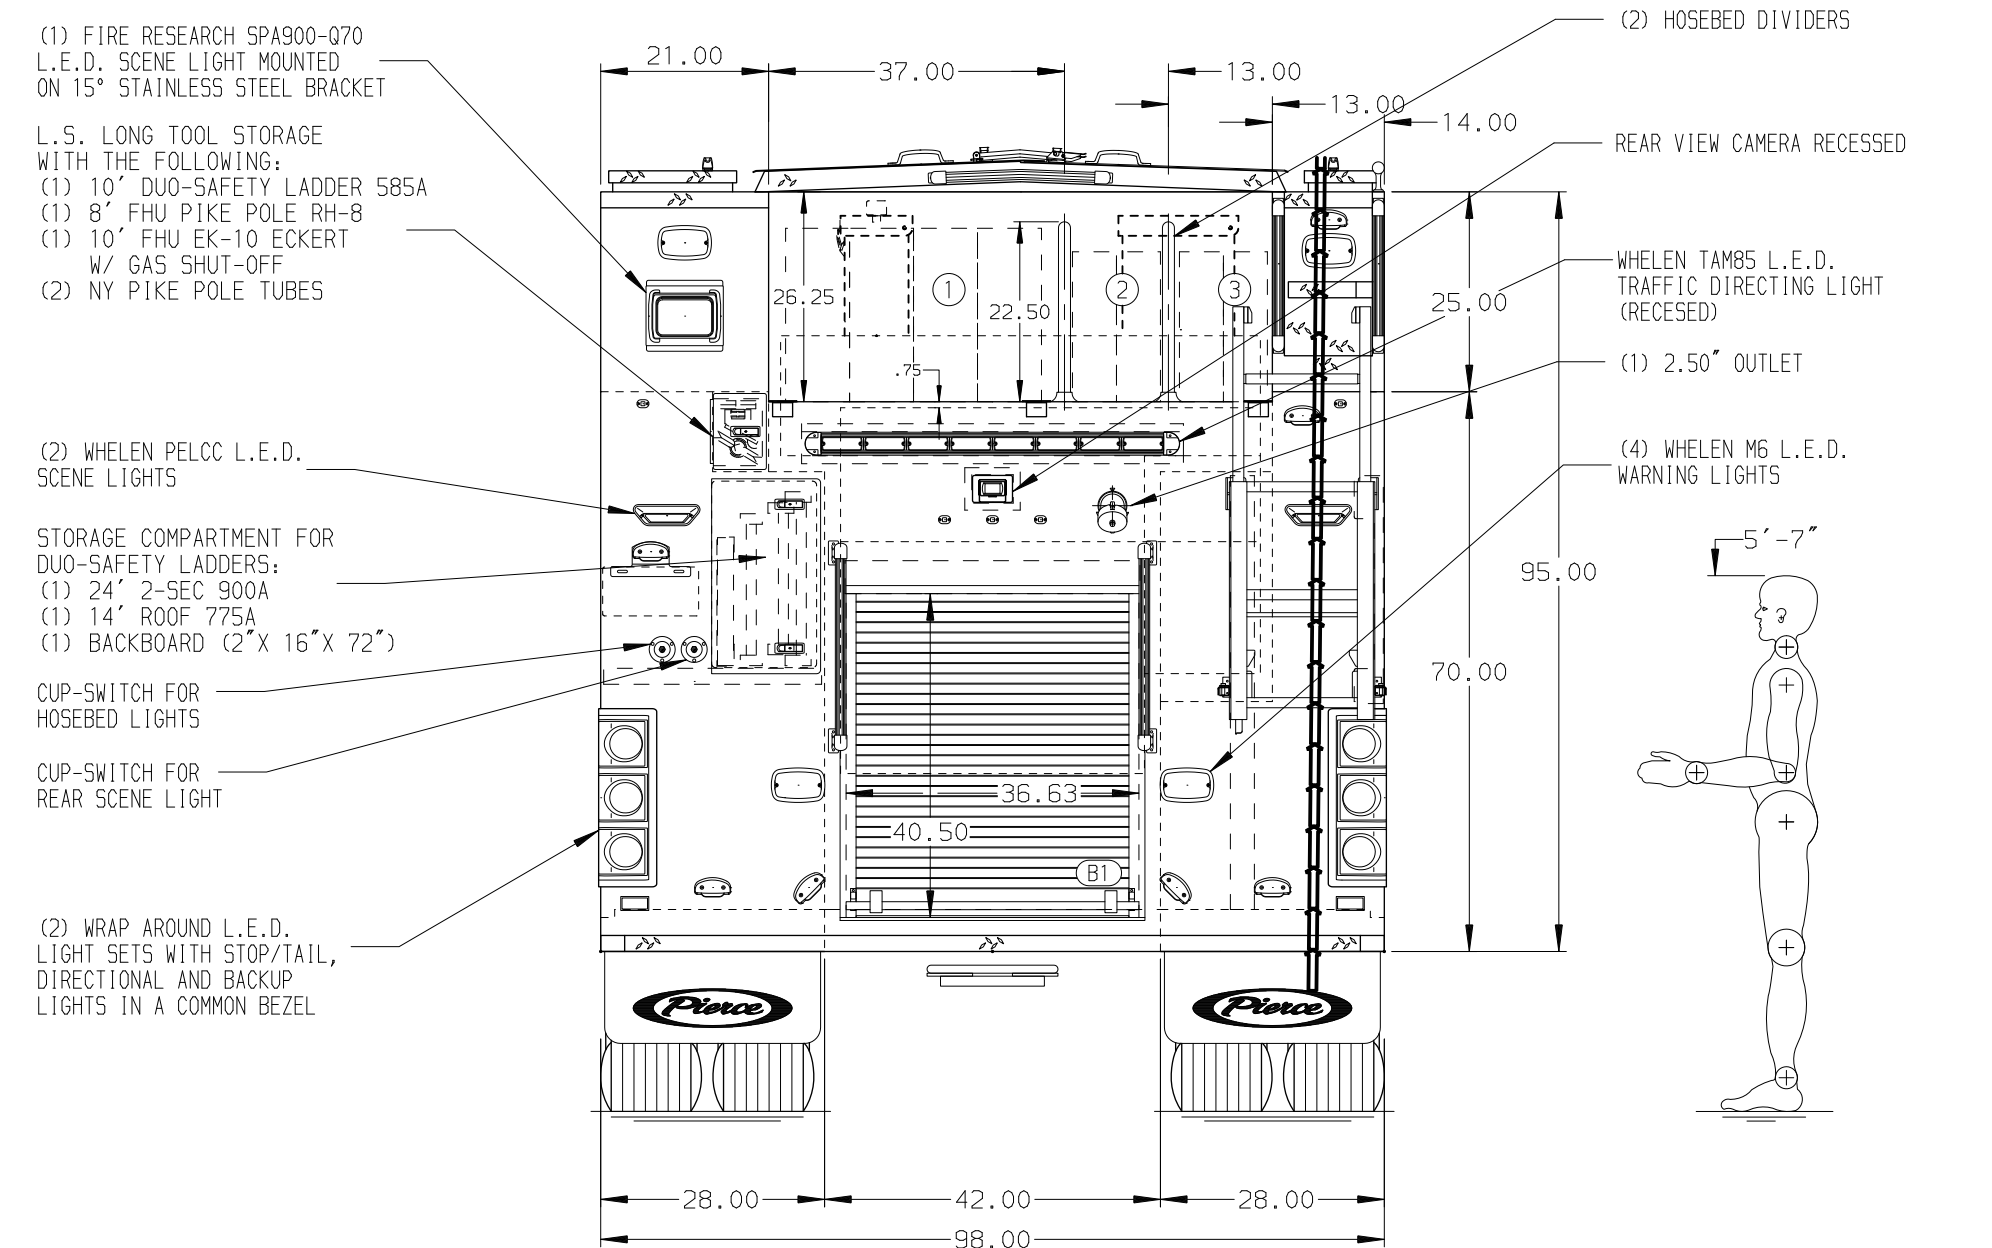

SURFACE DESIGNATION AND PATHWAY MARKINGS

- HOSEBED CAPACITIES
- ① 950' OF 5.00" D.J. POLY HOSE
 - ② 400' OF 3.00" D.J. POLY HOSE
 - ③ 400' OF 3.00" D.J. POLY HOSE

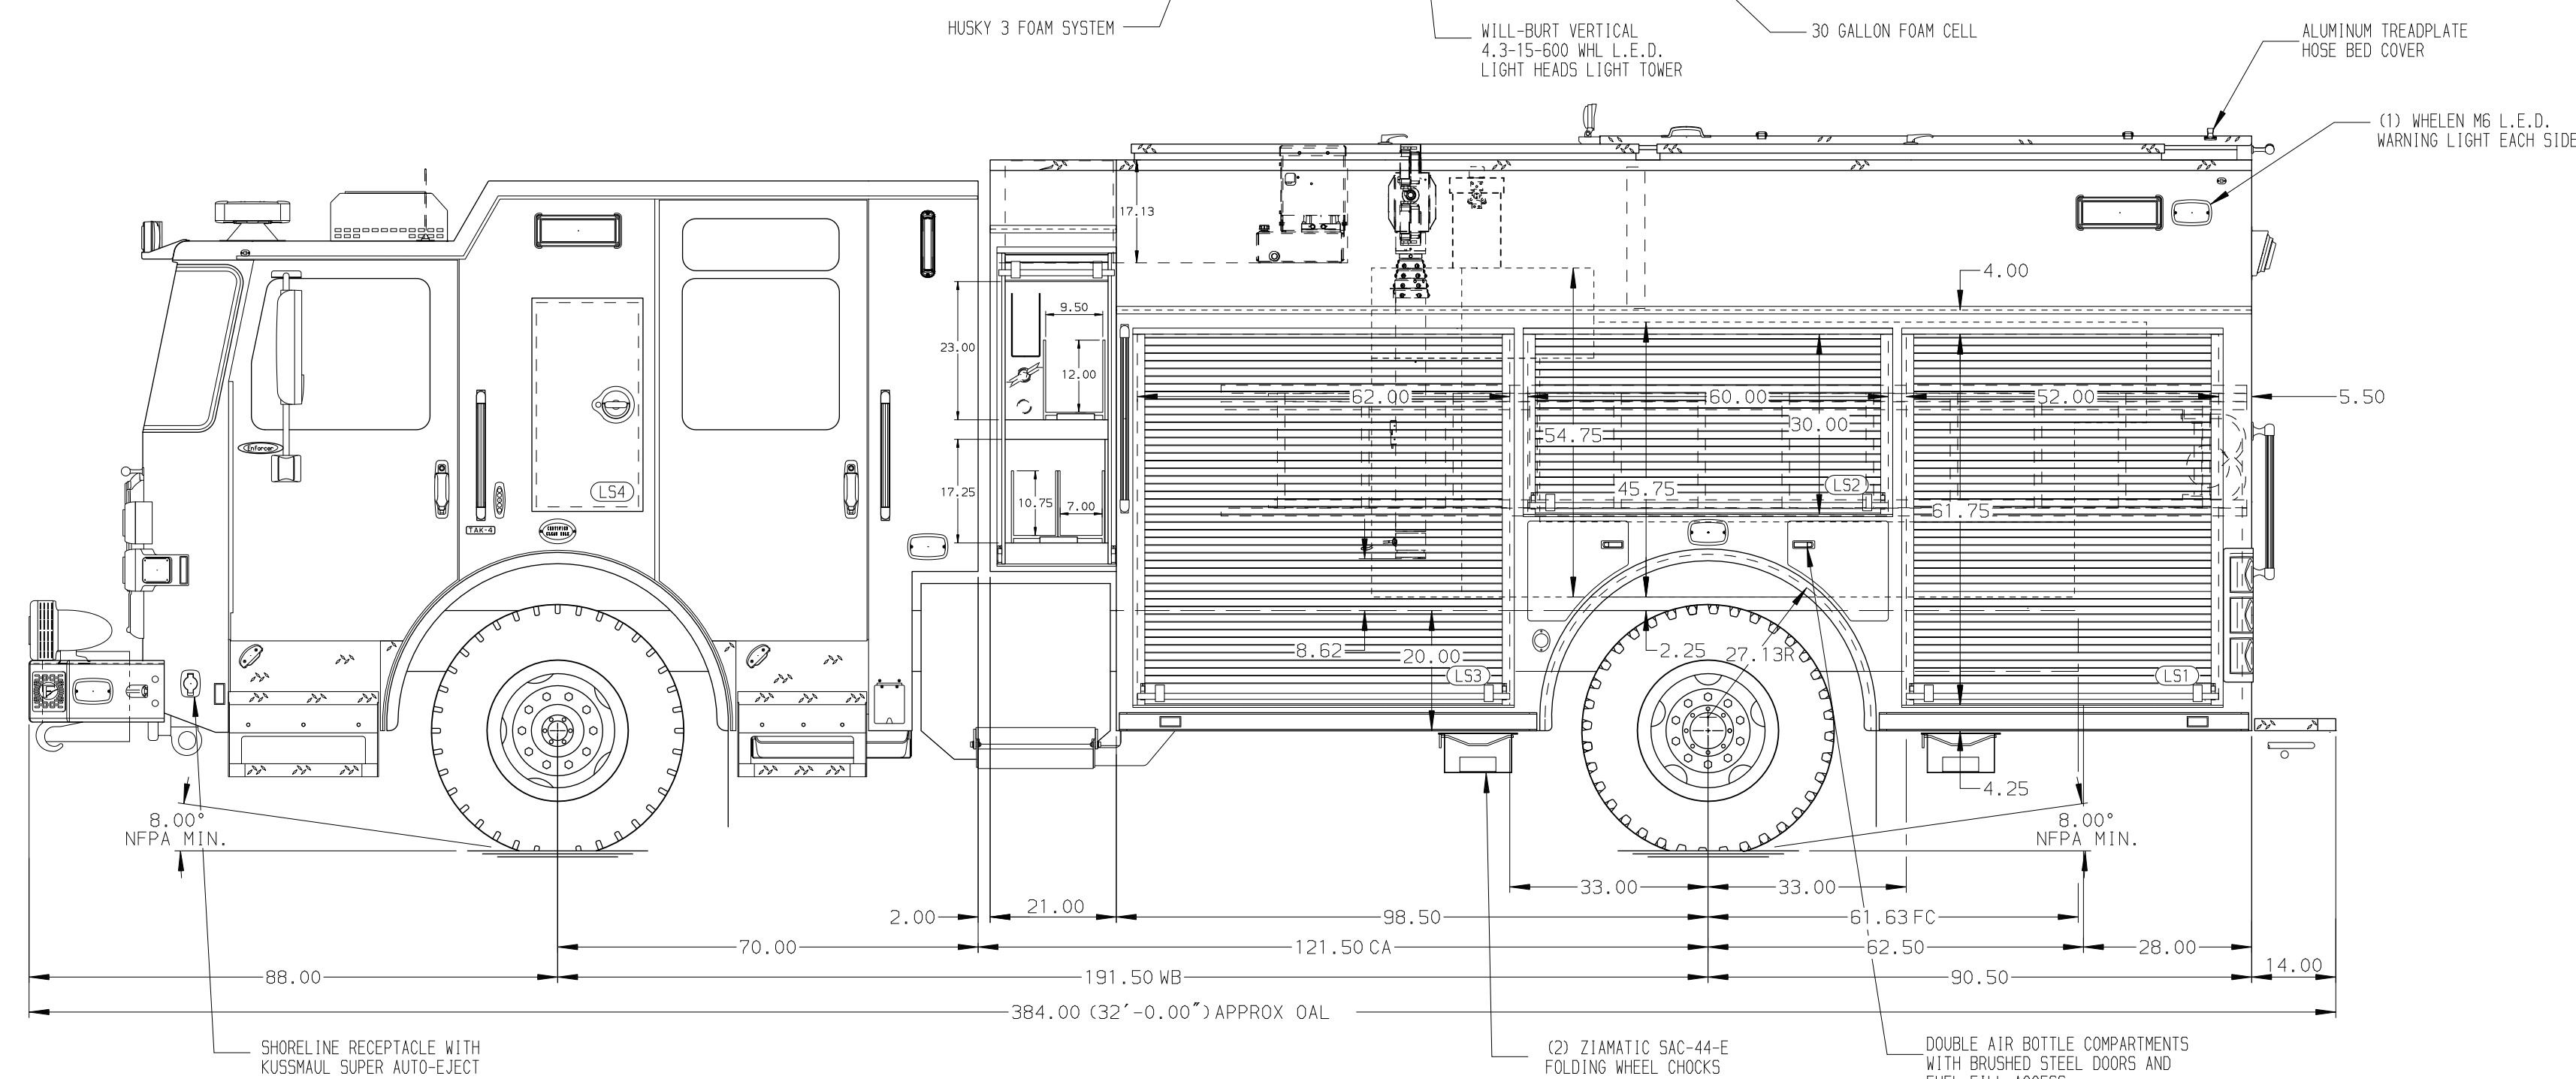

ALUMINUM BODY MAXIMUM O.A.L. 392.50" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. PACCAR DEF TANK MOUNTED UNDER CAB ON THE DRIVER'S SIDE
- 2. BATTERY CHARGER LOCATED BEHIND THE DRIVER'S SEAT
- 3. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
- 4. L.E.D. DUAL LIGHT STRIPS LOCATED IN HOSE BED PER SHOP ORDER
- 5. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON THE DS PUMP PANEL
- 6. TWO 120V RECEPTACLES LOCATED PER ORDER
- 7. 150# OIL DRY HOPPER LOCATED FORWARD IN COMPARTMENT R51

REV	DATE	BY	CH	ENFORCER
▽	29JAN26	JWR	CHR	MAKE
▽	17DEC25	JWR	CHR	PIERCE
▽	09OCT25	JDA	KLH	MODEL

		JOB NO.	40295
MANUFACTURING INC.		SCALE	DATE
		1:24	
TITLE		DRAWN BY	030CT25
1500 GPM, 1000G TANK, 9700G WATER, 30G FOAM		JWR	
FOR		CHECKED BY	60CT25
LIBERTY HILL FIRE DEPARTMENT - WILLIAMSON COUNTY ESD 4		KLH	
LIBERTY HILL, TEXAS		SHEET SIZE	SHEET NO.
DWG NO.		D	1 OF 1