


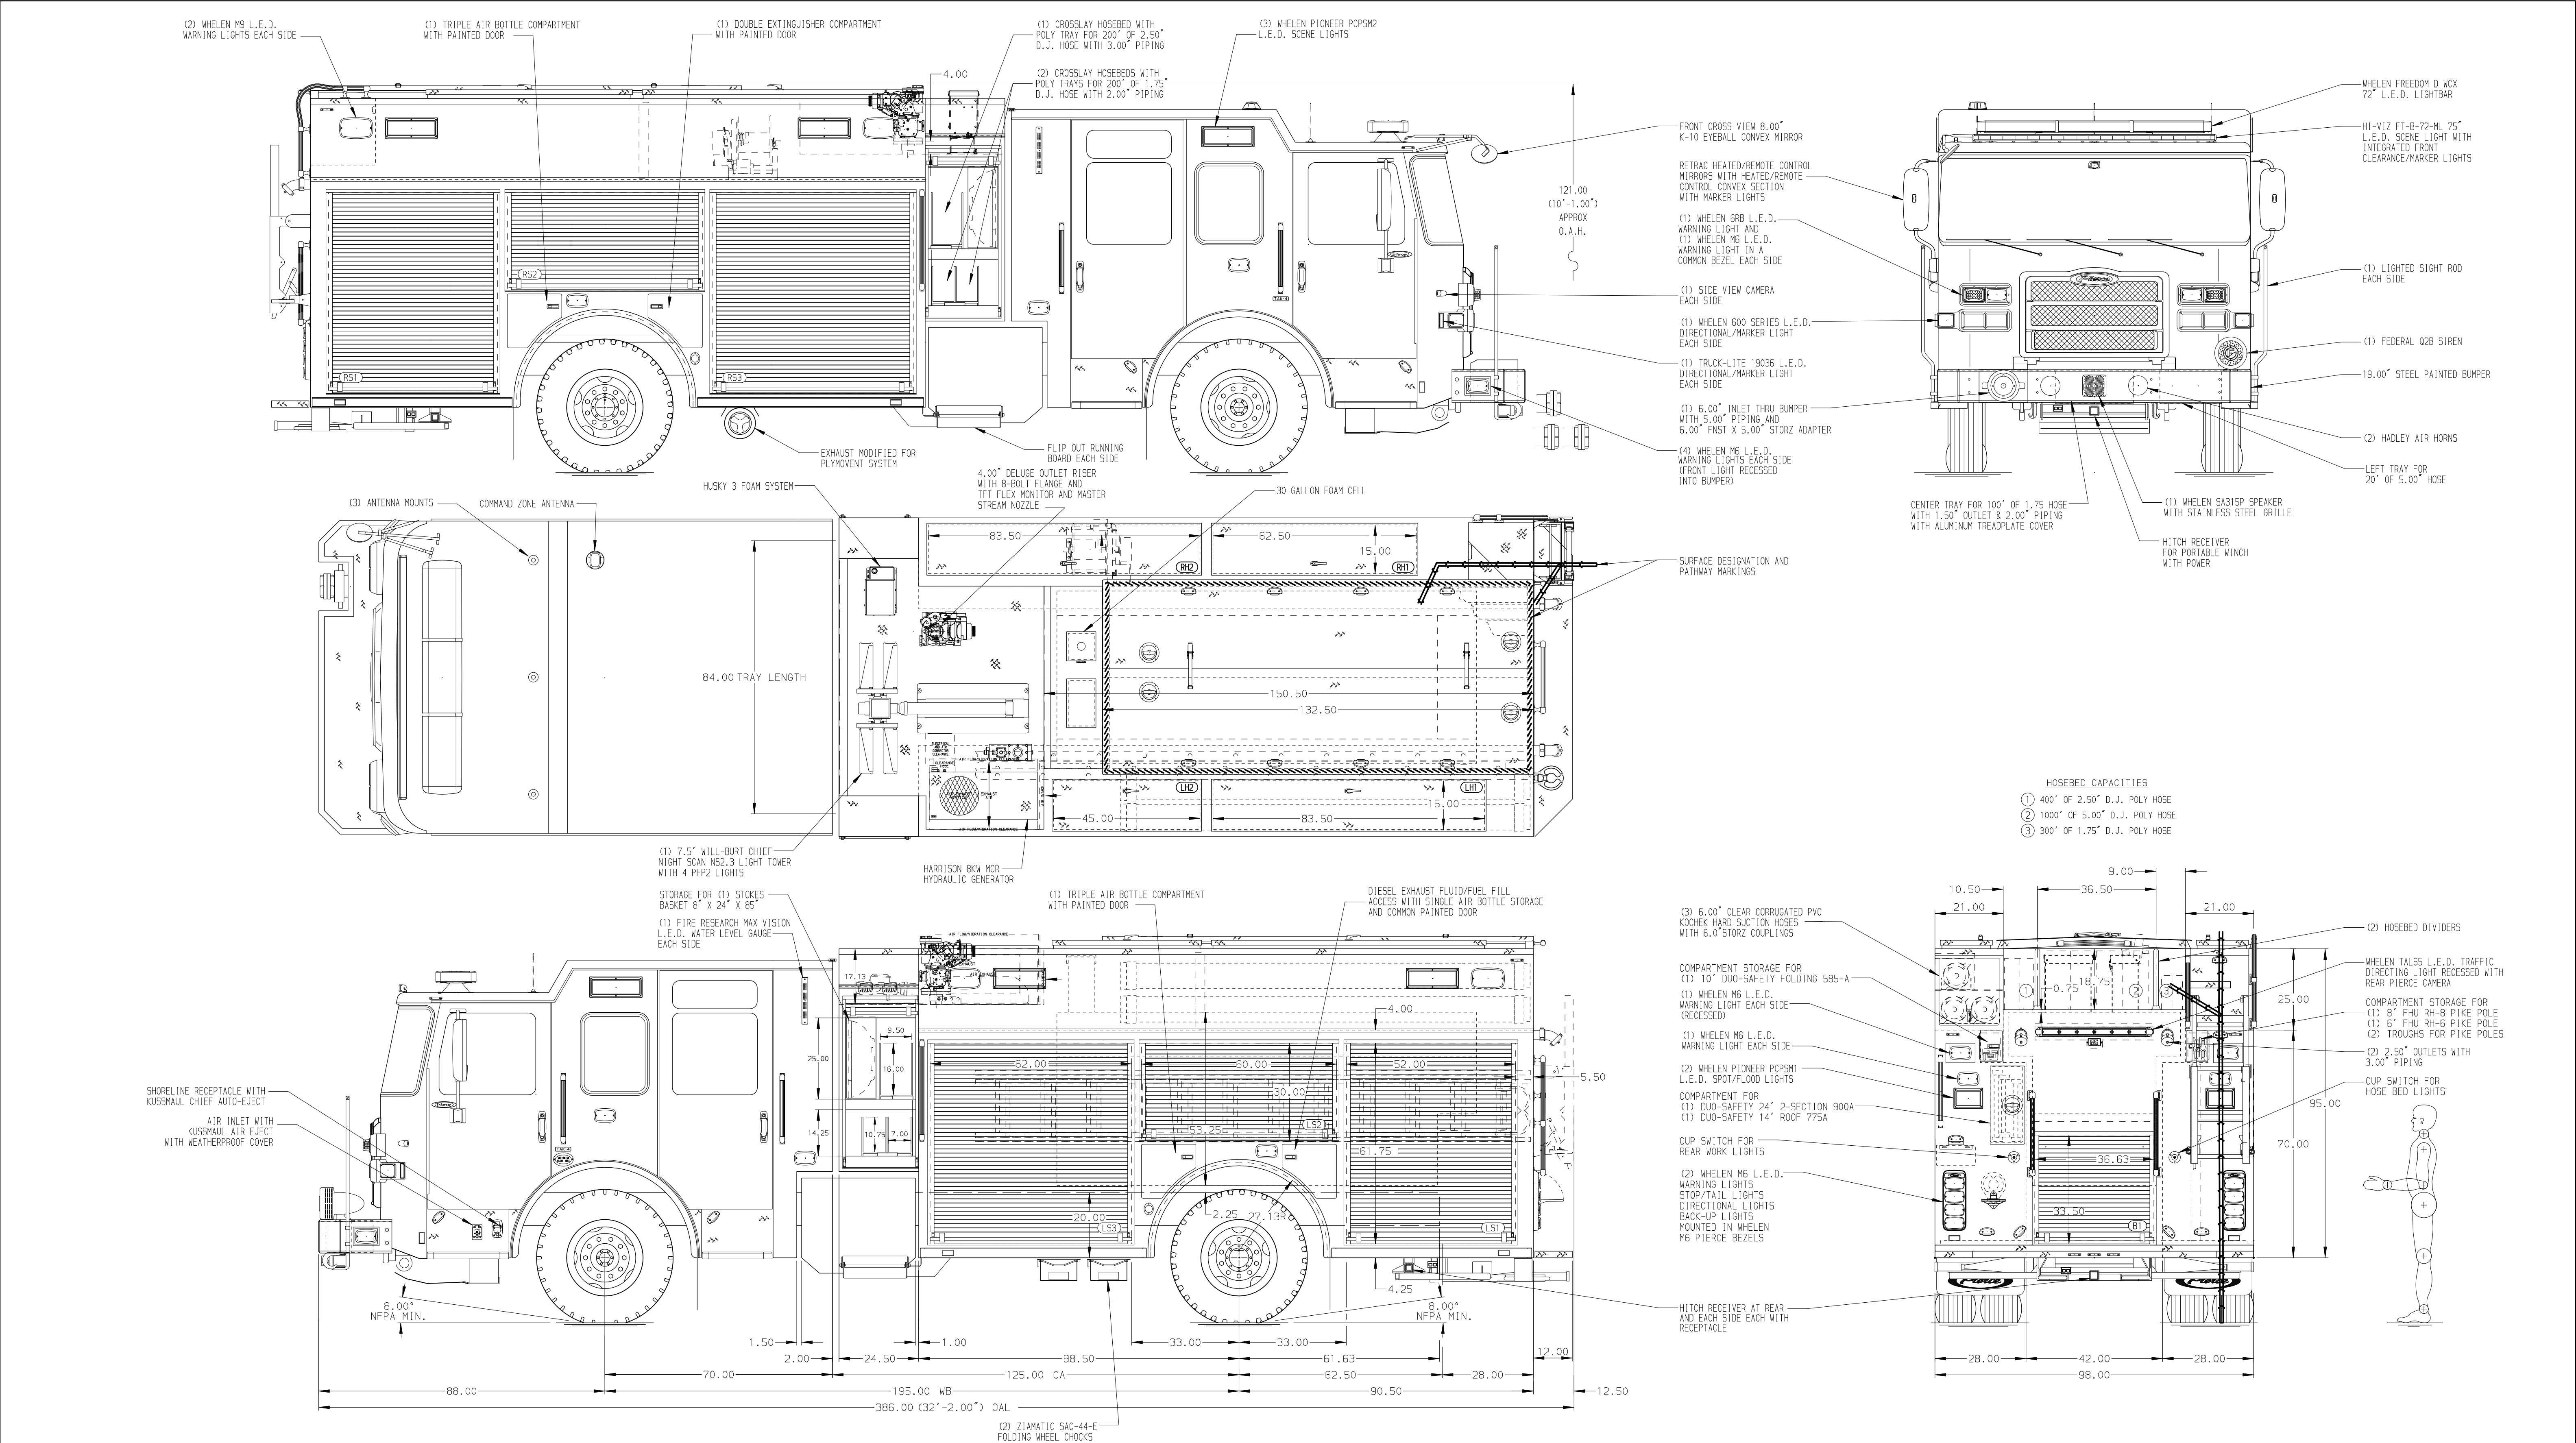

ALUMINUM BODY

MAXIMUM O.A.L. 386.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. ROSCO DV XC4 DUAL FORWARD AND INTERIOR CAMERA MOUNTED INSIDE OF FRONT WINDSHIELD
3. STAINLESS STEEL SCUFFPLATE ON BODY REAR CORNERS
4. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 LOCATED IN R53 WITH 200' OF 10/3 CABLE
5. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT

22JUL26	BTH	CSH	CHASSIS DATA
20FEB26	KLE	CSH	MAKE
26JAN26	LST	CSH	PIERCE
22JAN26	LST	CSH	MODEL
20JAN26	BTH	CSH	ENFORCER
REV	DATE	BY	CH

 MANUFACTURING INC.	JOB NO.	40322
	SCALE	DATE
	1:24	
	DRAWN BY	14NOV25
TITLE	2000GPM, 1030G TANK, 1000G WATER, 30G FOAM	
	189" PUC RESCUE, MUX	
FOR	AVON VOLUNTEER FIRE DEPARTMENT	
	AVON, CONNECTICUT	
DWG NO.	40322AD-SH1	
CHECKED BY	SZE	14NOV25
SHEET SIZE	D	SHEET NO.
		1 OF 1