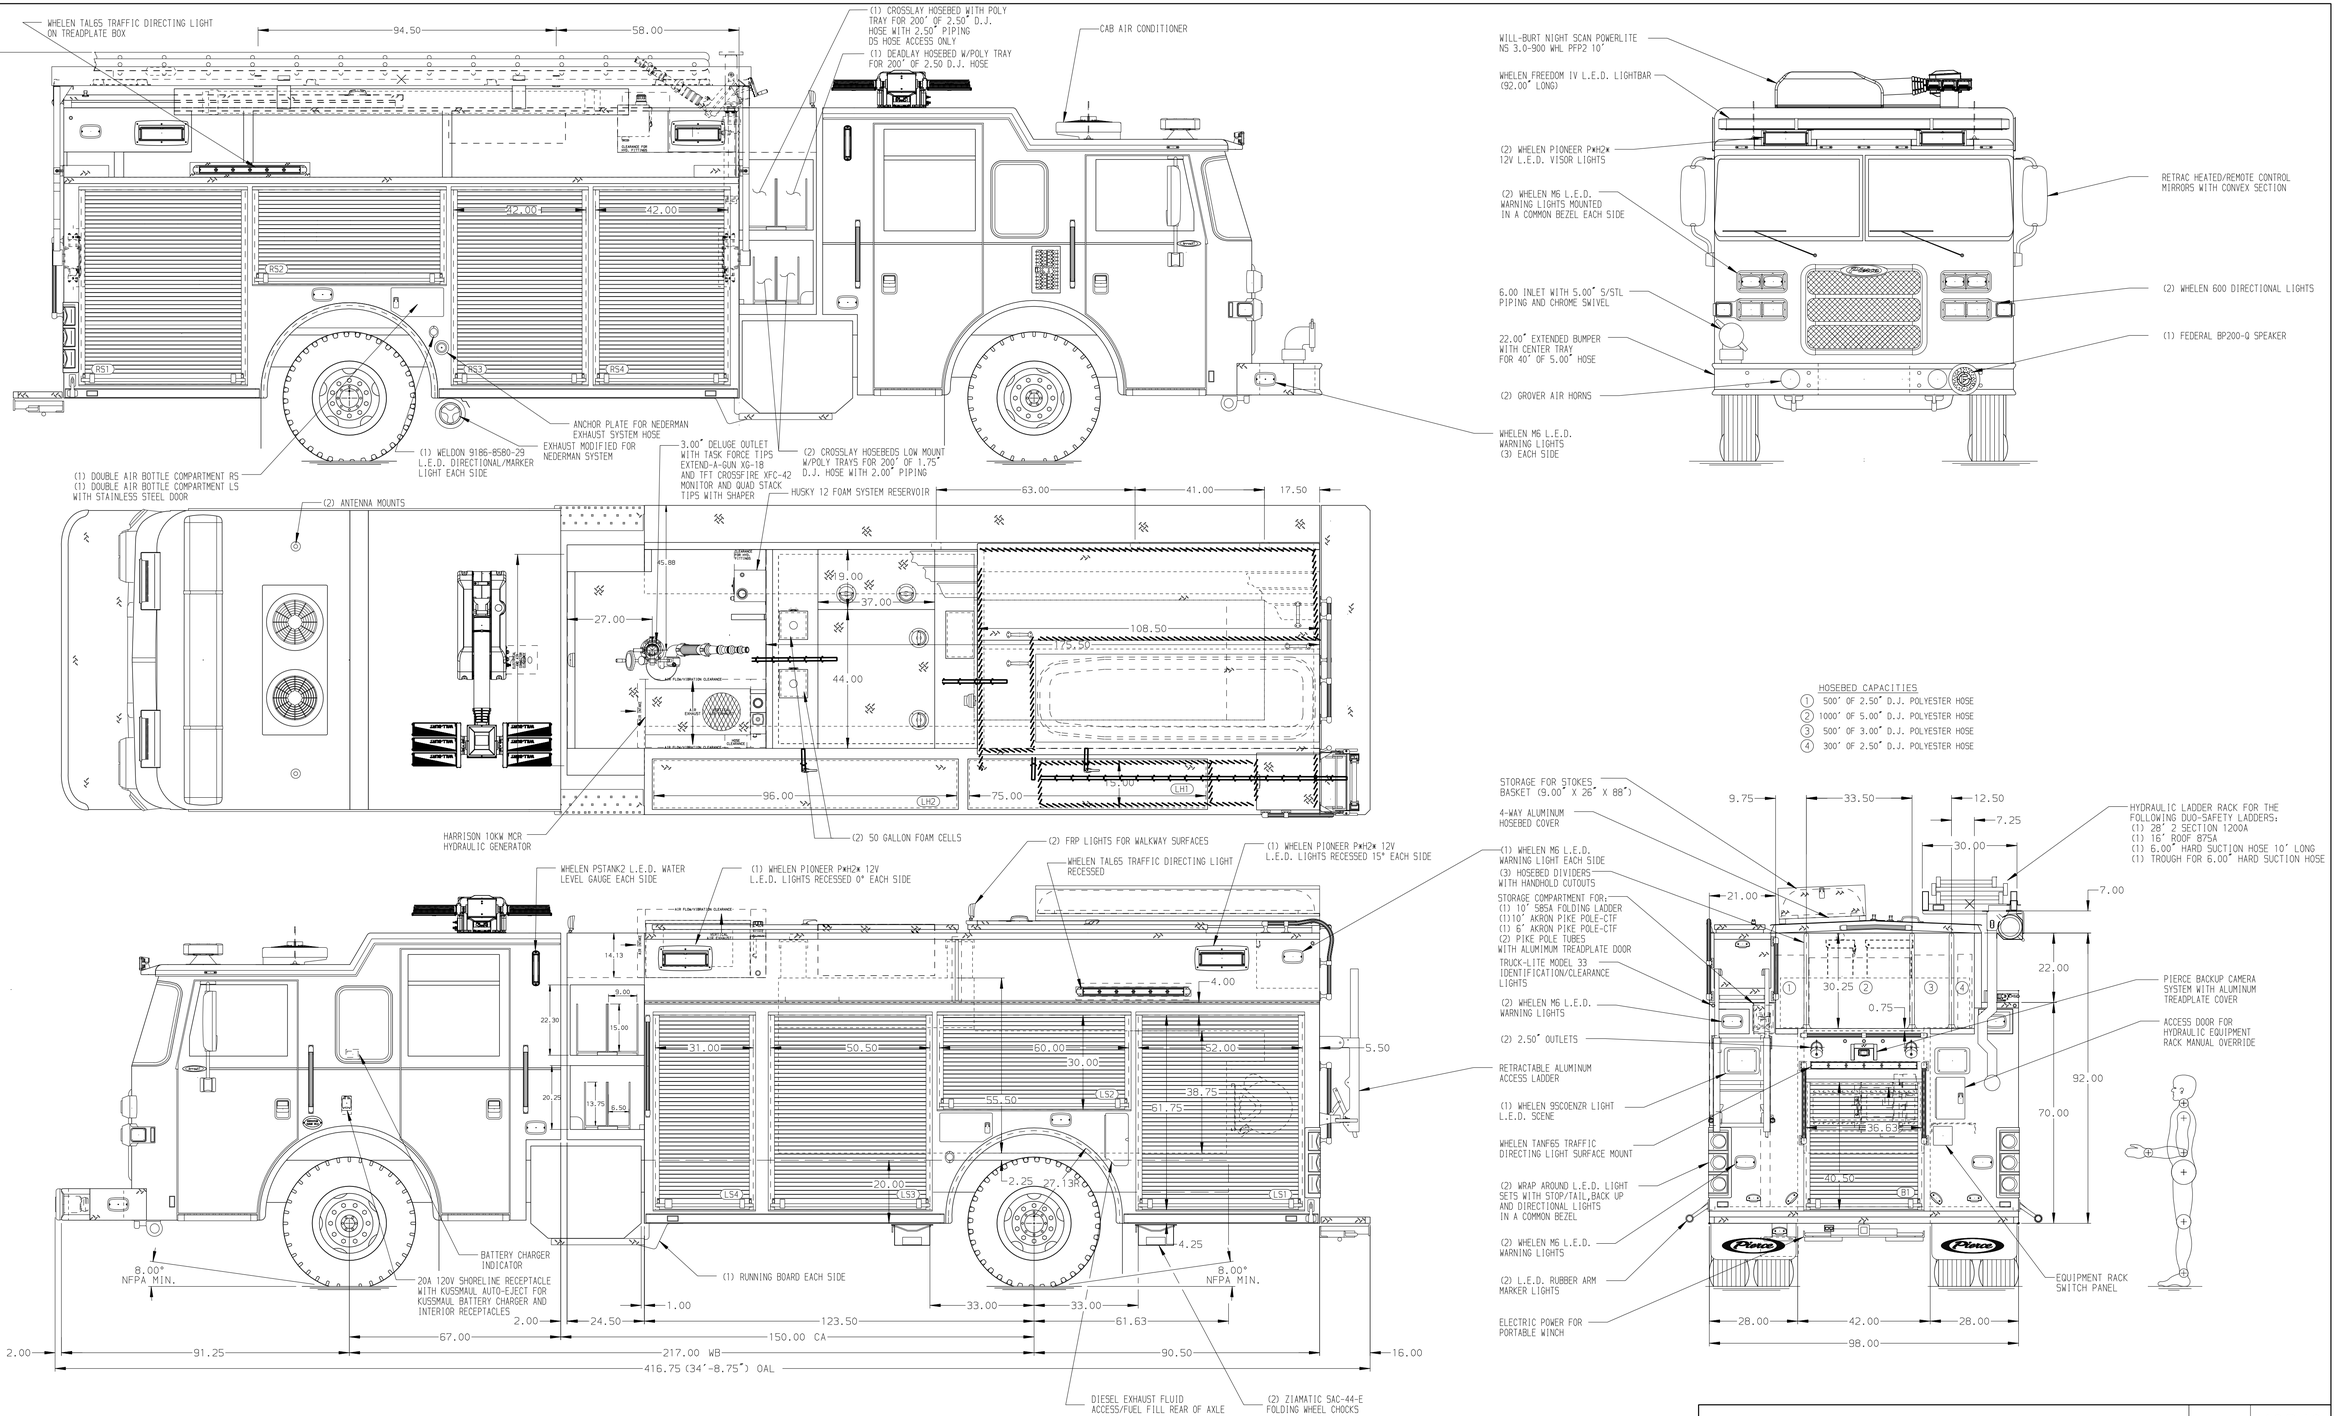


HOSEBED CAPACITIES

1. 500' OF 2.50" D.J. POLYESTER HOSE
2. 1000' OF 5.00" D.J. POLYESTER HOSE
3. 500' OF 3.00" D.J. POLYESTER HOSE
4. 300' OF 2.50" D.J. POLYESTER HOSE

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. KUSSMAUL 40A BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17.18 IN COMPARTMENT B1 WITH 200' OF 10/3 CABLE
3. AIR INLET WITH DISCONNECT COUPLING IN D5 STEP WELL

REV	DATE	BY	CH
7	29MAY26	LST	SJS
6	09MAR26	LST	SJS
5	29JAN26	LST	SJS
4	12DEC25	LST	IPR

CHASSIS DATA
MAKE: PIERCE
MODEL: ARROW XT

Pierce MANUFACTURING INC.

TITLE: 2000 GPM,1090 G TANK,990 G WATER,(2) 50 G FOAM CELLS 214" BODY, HARD WIRED
FOR: MONEE FIRE PROTECTION DISTRICT
MONEE, IL
DWG NO. 40340AD

JOB NO.	40340
SCALE	1:24
DATE	
DRAWN BY	LST 24NOV25
CHECKED BY	IPR 1DEC25
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 29-MAY-2026 13:00:39