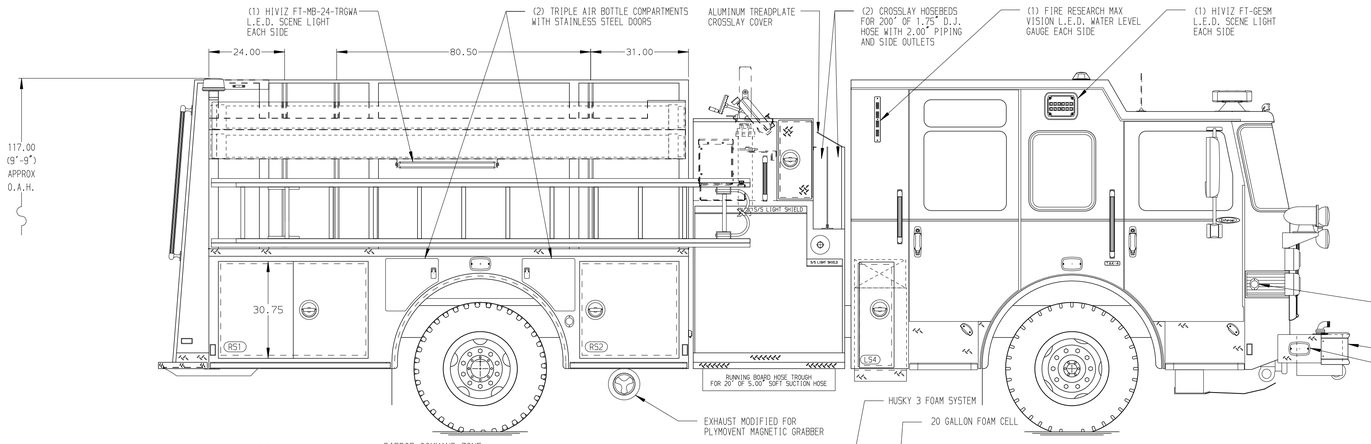

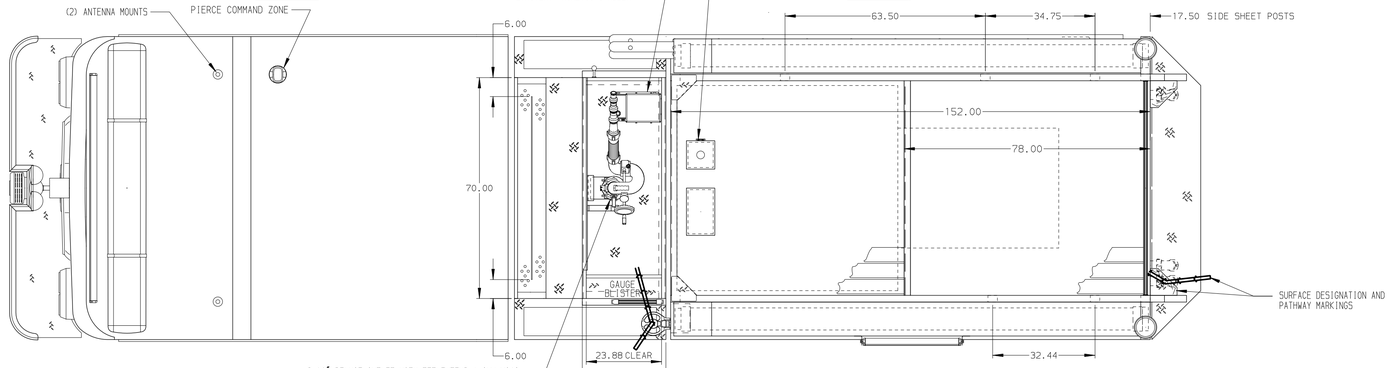

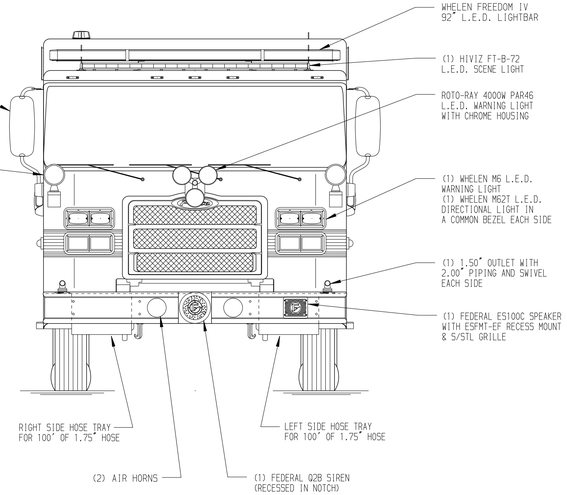

HOSEBED CAPACITIES

1. 300' OF 1.75" MERCEDES KRAKEN EXO HOSE
2. 200' OF 1.75" MERCEDES KRAKEN EXO HOSE
3. 1500' OF 5.00" MERCEDES MEGAFLOW HOSE
4. 400' OF 3.00" D.J. POLY HOSE
5. 200' OF 2.50" MERCEDES KRAKEN EXO HOSE

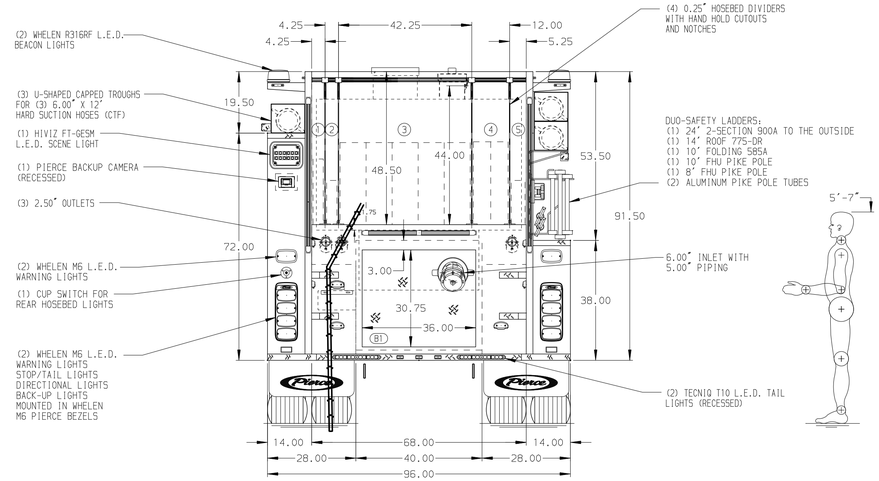

ALUMINUM BODY | MAXIMUM O.A.L. 381.00" | MAXIMUM O.A.H. 120.00" | SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON DRIVER SIDE PUMP PANEL
3. BATTERY CHARGER LOCATED PER ORDER
4. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
5. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
6. DUAL L.E.D. LIGHT STRIPS LOCATED IN CARGO AREA
7. (4) 120V DUPLEX RECEPTACLES LOCATED IN CAB PER ORDER

REV	DATE	BY	CH
2	02MAR26	BBA	COS
1	21JAN26	BBA	COS

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

JOB NO.	40362
SCALE	1:24
DATE	
TITLE	2000GPM, 1000G TANK, 980G WATER, 20G FOAM 152" 2G PUMPER BODY, MUX
DRAWN BY	BBA
DATE	11NOV25
FOR	HONEY BROOK FIRE COMPANY HONEY BROOK, PENNSYLVANIA
CHECKED BY	CDU
DATE	20NOV25
DWG NO.	40362AD
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 02-MAR-2026 12:45:48