


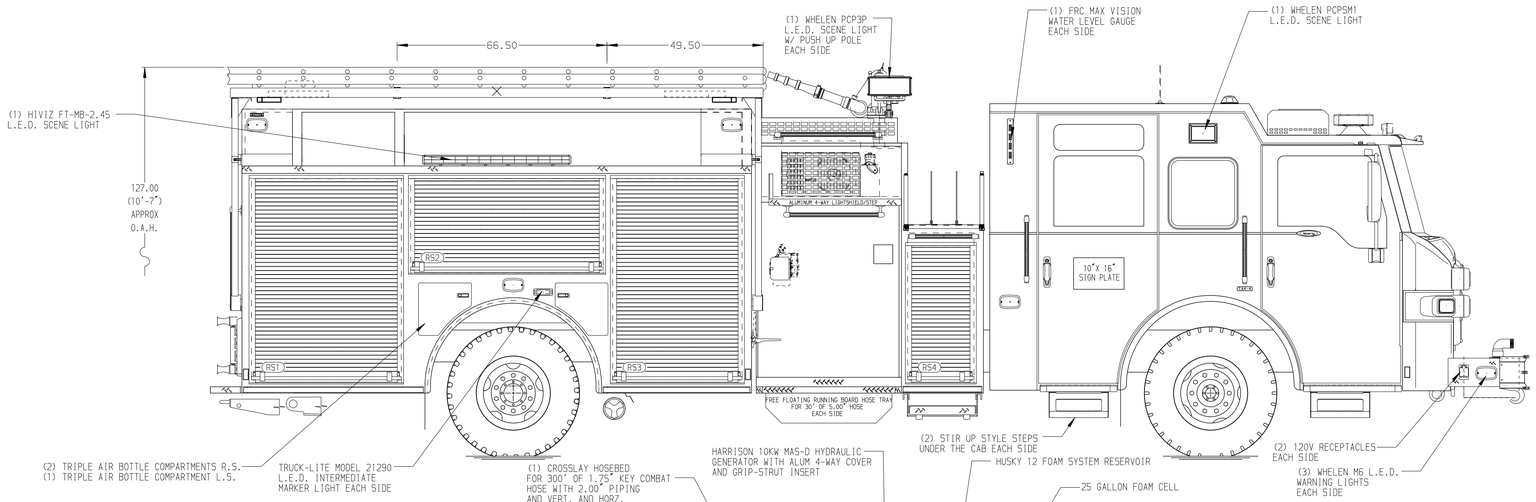


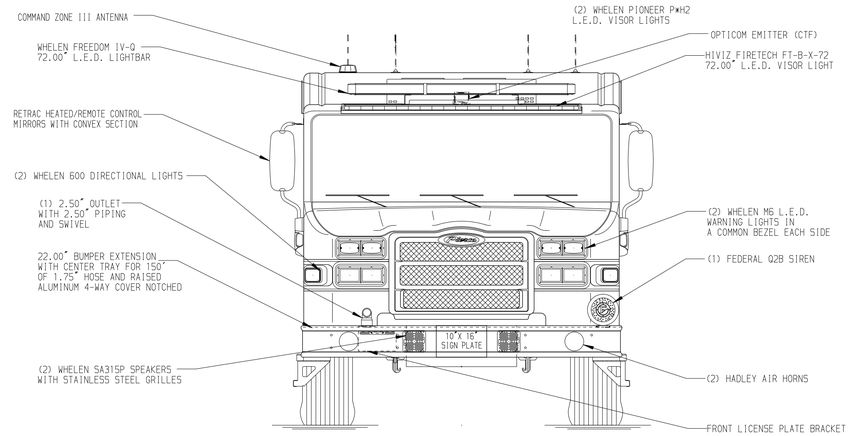

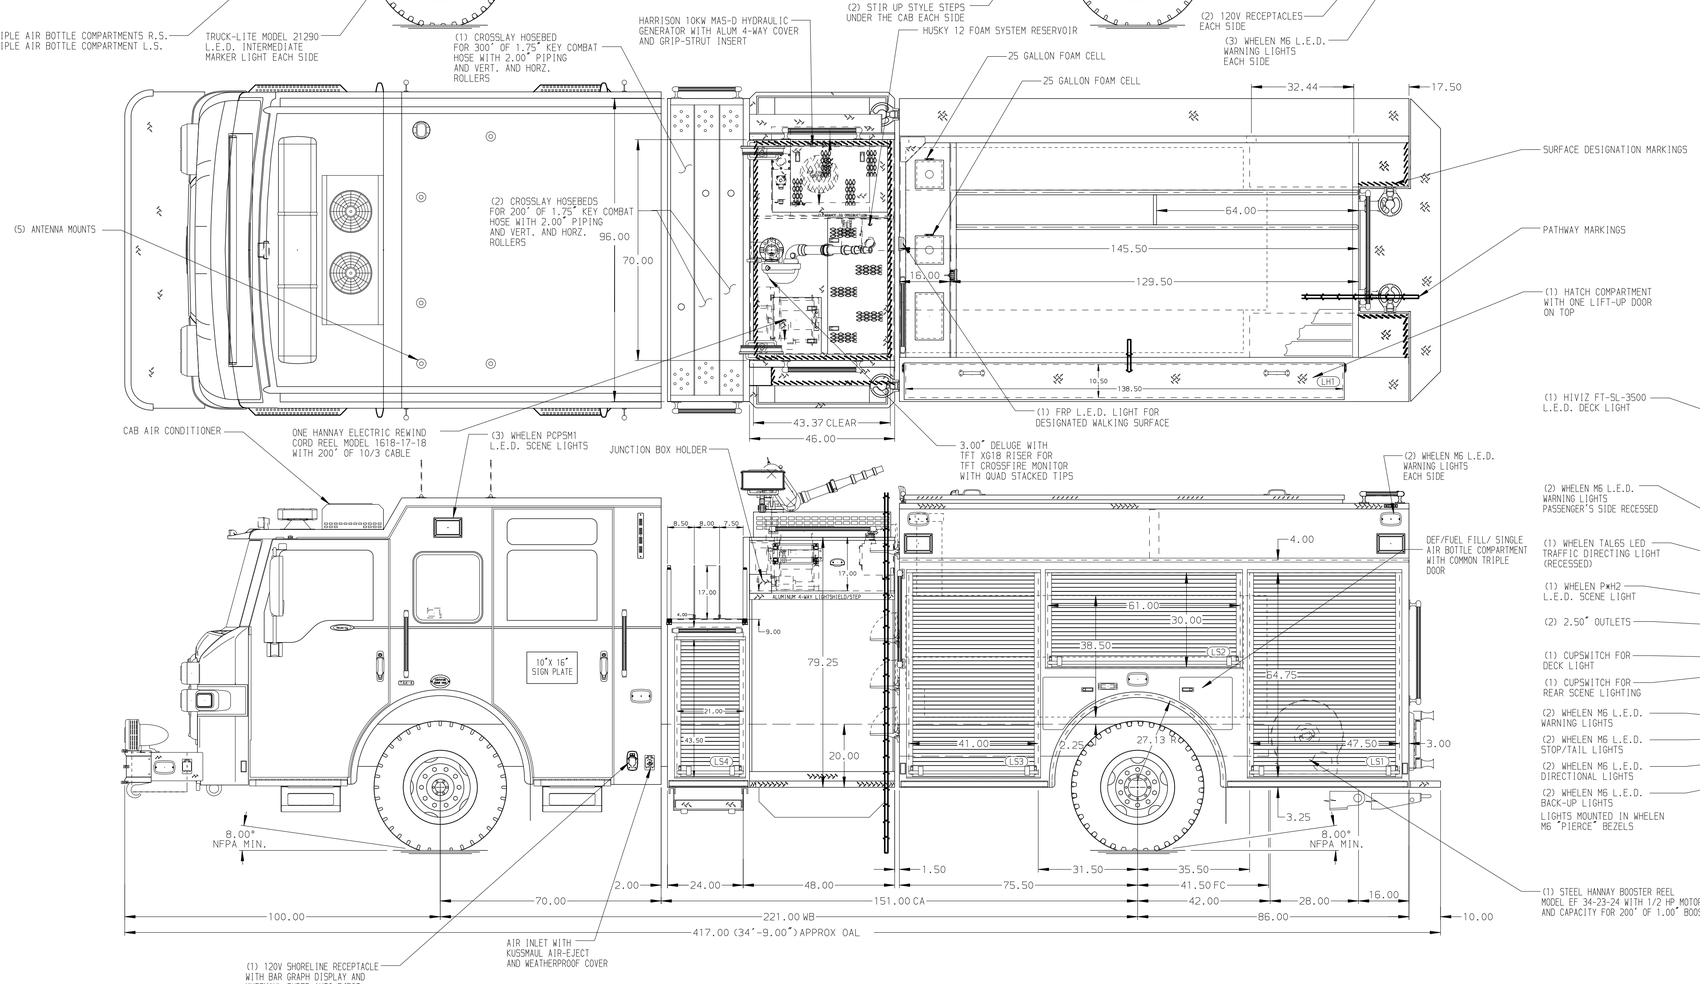

HOSEBED CAPACITIES
① - 1200' OF 5.00" D.J. POLY HOSE
② - 200' OF 2.50" D.J. POLY HOSE
③ - 800' OF 2.50" D.J. POLY HOSE

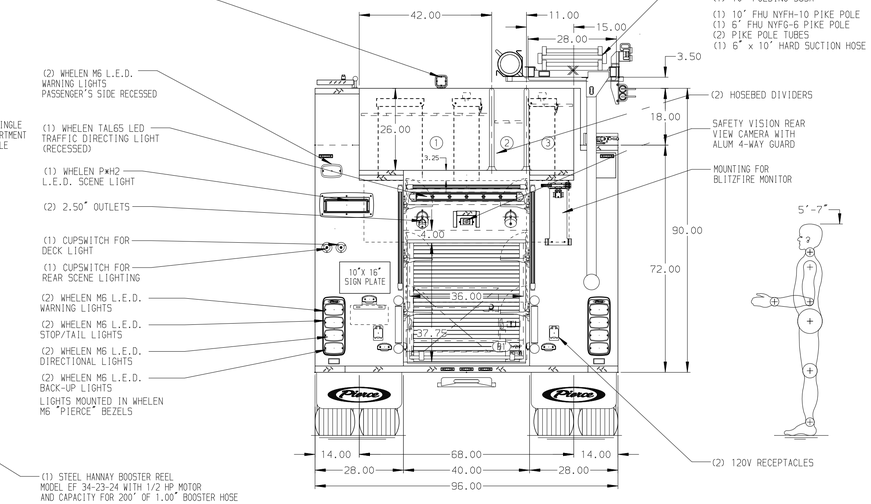

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. CTF WHEEL CHOCKS AND BRACKETS
2. BATTERY CHARGER LOCATED BEHIND THE DRIVER'S SEAT
3. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON THE DS PUMP PANEL
4. BATTERY CHARGER INDICATOR LOCATED BEHIND THE DRIVER'S SEAT DISPLAYED THROUGH WINDOW

REV	DATE	BY	CH
V	29SEP26	LST	GKH
V	02MAR26	LST	CHR
B	11FEB26	LST	CHR
V	29JAN26	LST	CHR

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY FR

Pierce MANUFACTURING INC.

TITLE: 1500 GPM,800 G TANK,750 G WATER,(2) 25 G FOAM CELLS 161" BODY, VELOCITY ESP ELECTRICAL SYSTEM
FOR: CONROE FIRE DEPARTMENT
CONROE, TEXAS
DWG NO.: 40375AD-SH1

JOB NO.: 40375 01-03
SCALE: 1:24
DATE:
DRAWN BY: LST 11NOV25
CHECKED BY: KLH 11NOV25
SHEET SIZE: D
SHEET NO.: 1 OF 2

View File Created 29-SEP-2026 14:10:58