


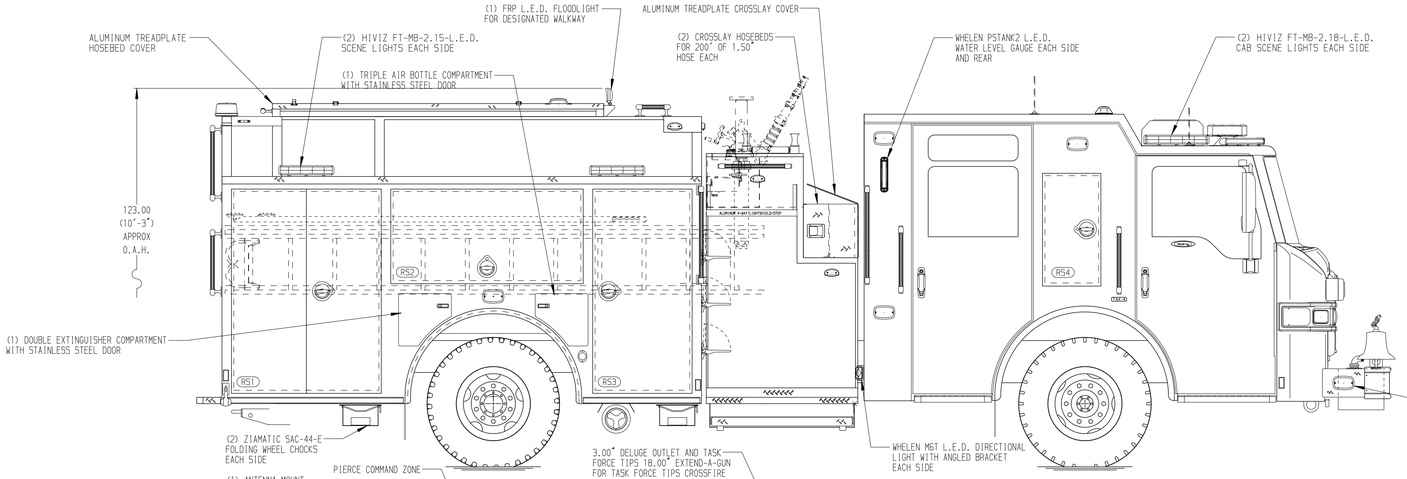


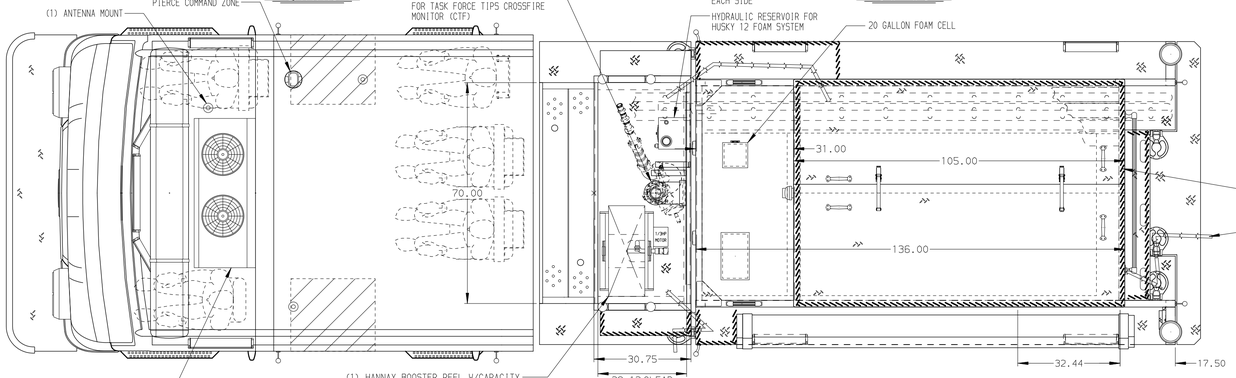

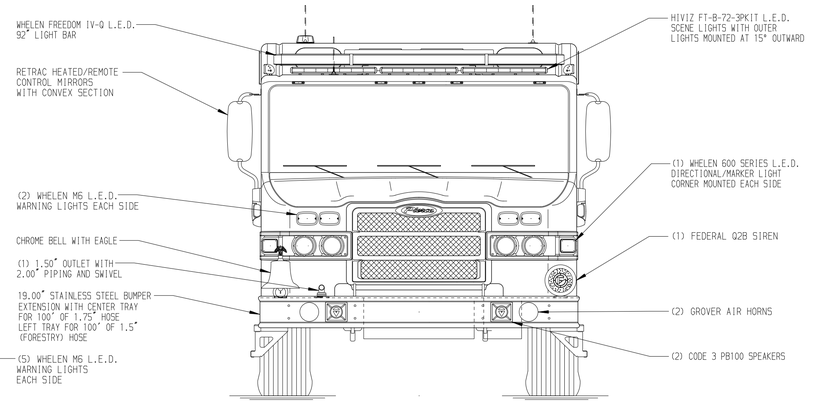

HOSEBED CAPACITIES

1. 800' OF 2.50" D.J. POLY HOSE
2. 300' OF 2.50" D.J. POLY HOSE SINGLE STACK
3. 200' OF 2.50" D.J. POLY HOSE SINGLE STACK
4. 800' OF 5.00" D.J. POLY HOSE

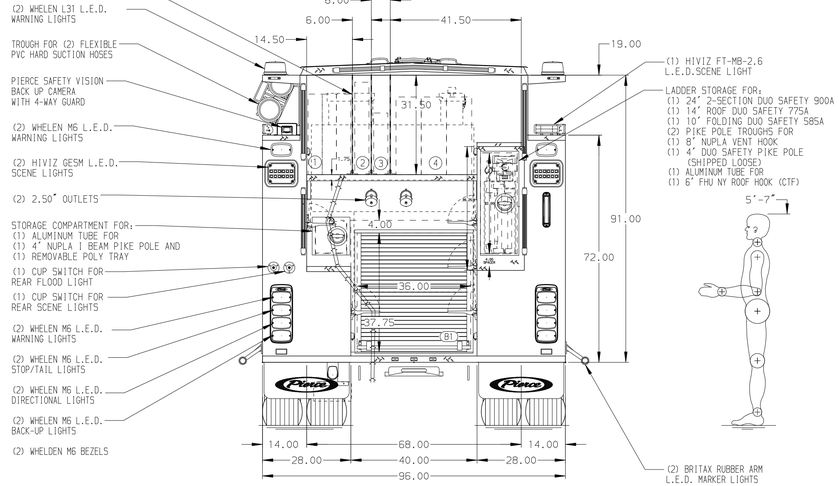

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. AIR OUTLET WITH SHUT OFF VALVE LOCATED IN DS PUMP PANEL
3. BATTERY CHARGER LOCATED PER ORDER
4. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT WITH BRACKET
5. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
6. SHORELINE RECEPTACLE WITH STRAIGHT BLADE NEMA LOCATED ON DRIVER SIDE STEPWELL

REV	DATE	BY	CH
V	28JUL26	KLE	BSE
V	03JUNE26	KSK	BSE
V	07MAY26	KSK	BSE
V	19MAR26	KSK	BSE
V	05FED26	JWR	BSE

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY FR

PIERCE MANUFACTURING INC.

TITLE: 2000 GPM, 670G TANK, 650G WATER, 20G FOAM 152" 2G PUMPER, VELOCITY ESP
FOR: EUGENE FIRE DEPARTMENT EUGENE, OREGON
DWG NO.: 40382AD-SH1

JOB NO.: 40382
SCALE: 1:24
DRAWN BY: JER
DATE: 19NOV25
CHECKED BY: BSE
DATE: 20NOV25
SHEET SIZE: D
SHEET NO.: 1 OF 2

View File Created 29-JUL-2026 09:46:24