


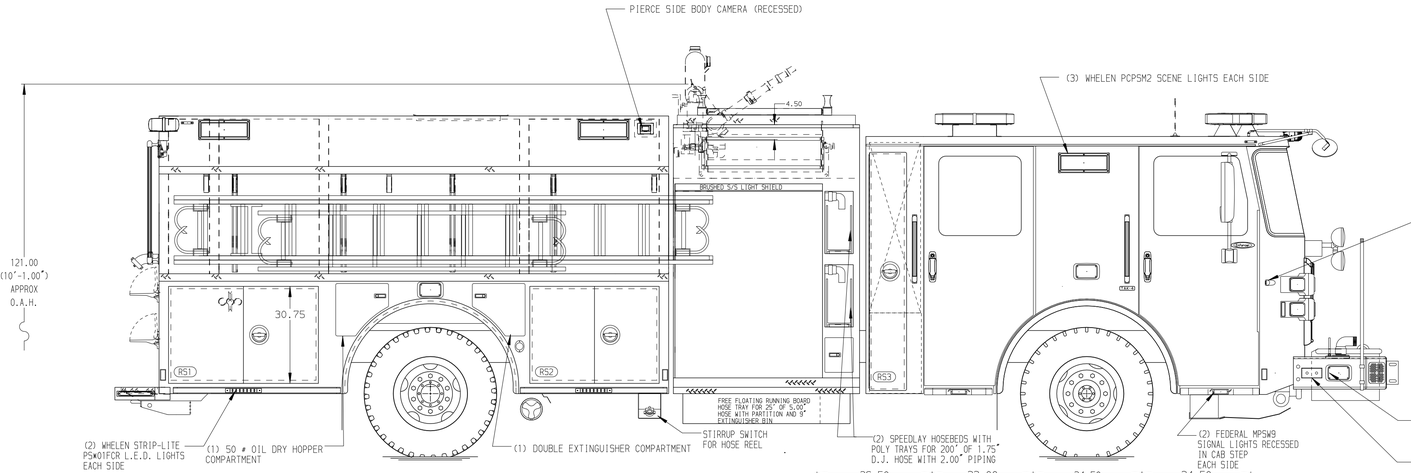


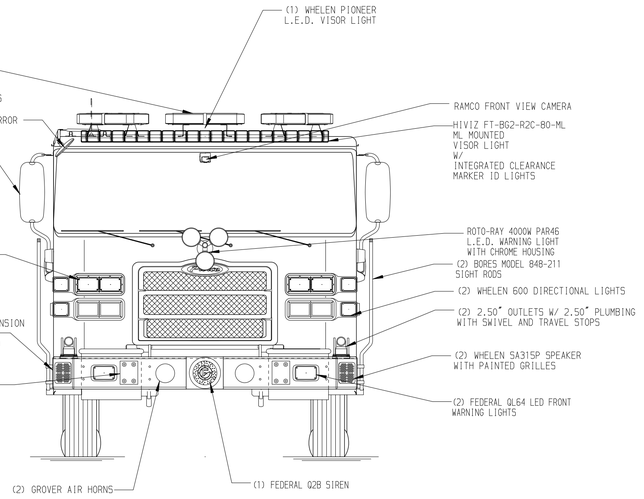

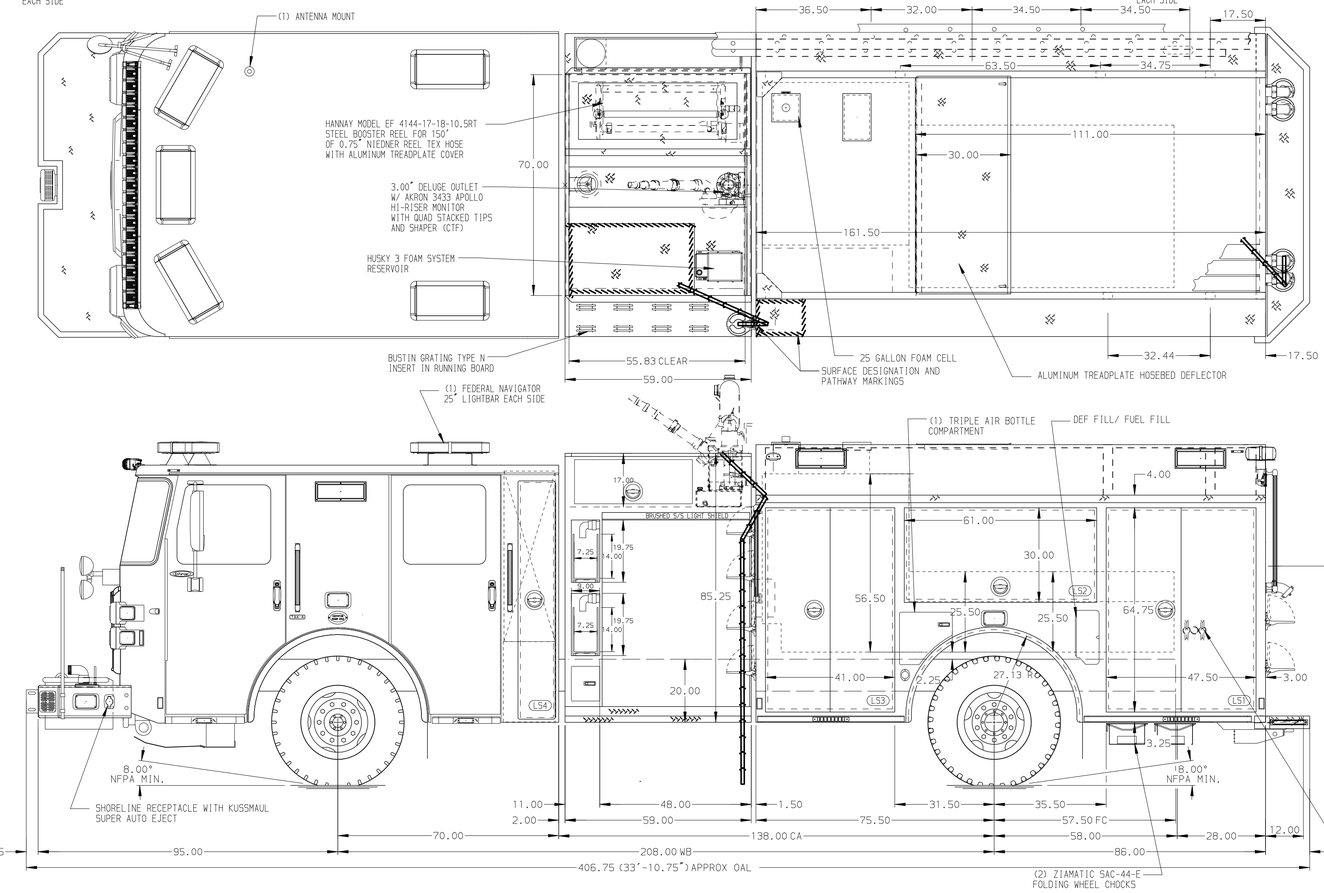

HOSEBED CAPACITIES

1. 200' OF 2.50" D.J. POLY HOSE IN A POLY TRAY
2. 400' OF 1.75" D.J. POLY HOSE IN A POLY TRAY
3. 1200' OF 5.00" D.J. POLY HOSE
4. 400' OF 1.75" D.J. POLY HOSE IN A POLY TRAY
5. 200' OF 2.50" D.J. POLY HOSE IN A POLY TRAY

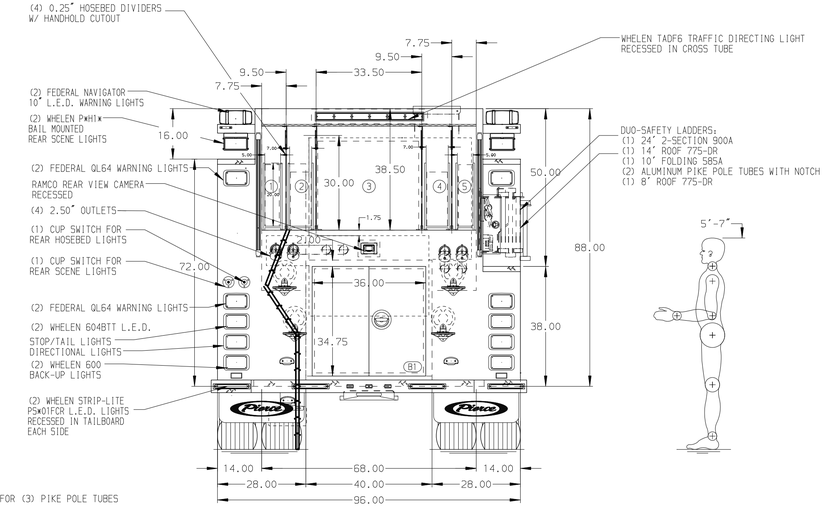

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
2. BATTERY CHARGER LOCATED BEHIND THE DRIVER'S SEAT
3. BATTERY CHARGER INDICATOR BEHIND THE DRIVER'S SEAT RISER
4. THREE PIKE POLE TUBES THROUGH THE BACK OF THE LS1/RS1 COMPARTMENT THRU THE TRANSVERSE PORTION
5. MIC AND SPEAKER COMPARTMENT LOCATED ON LEFT SIDE PUMP PANEL

REV	DATE	BY	CH
D	02JUN26	LST	TDC
C	30MAR26	LST	TDC
B	02MAR26	LST	TDC
A	27FEB26	LST	TDC
-	26FEB26	LST	TDC

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

PIERCE MANUFACTURING INC.

TITLE: 2000 GPM, 775 G TANK, 750 G WATER, 25 G FOAM CELL
161" BODY, HARD WIRED

FOR: DUNCAN FIRE DEPARTMENT
DUNCAN, SOUTH CAROLINA

DWG NO. 40562AD

JOB NO.	40562
SCALE	DATE
1:24	
DRAWN BY	8DEC25
LST	
CHECKED BY	8DEC25
SZE	
SHEET SIZE	SHEET NO.
D	1 OF 1

View File Created 03-JUN-2026 07:08:59