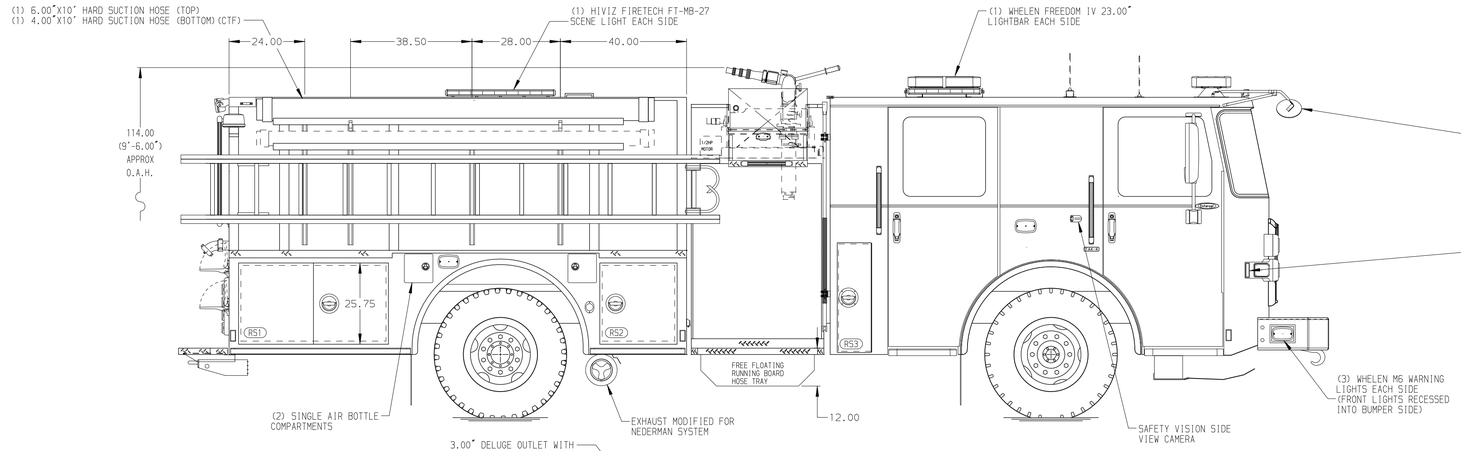
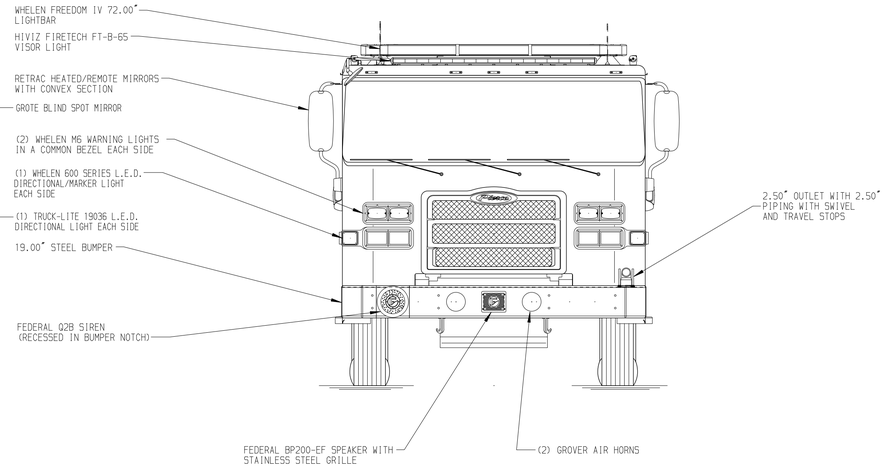
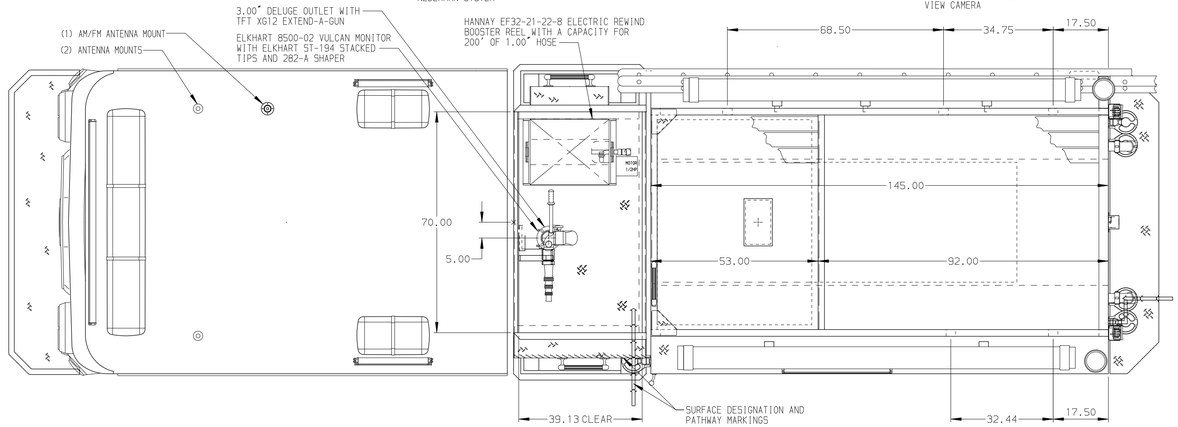
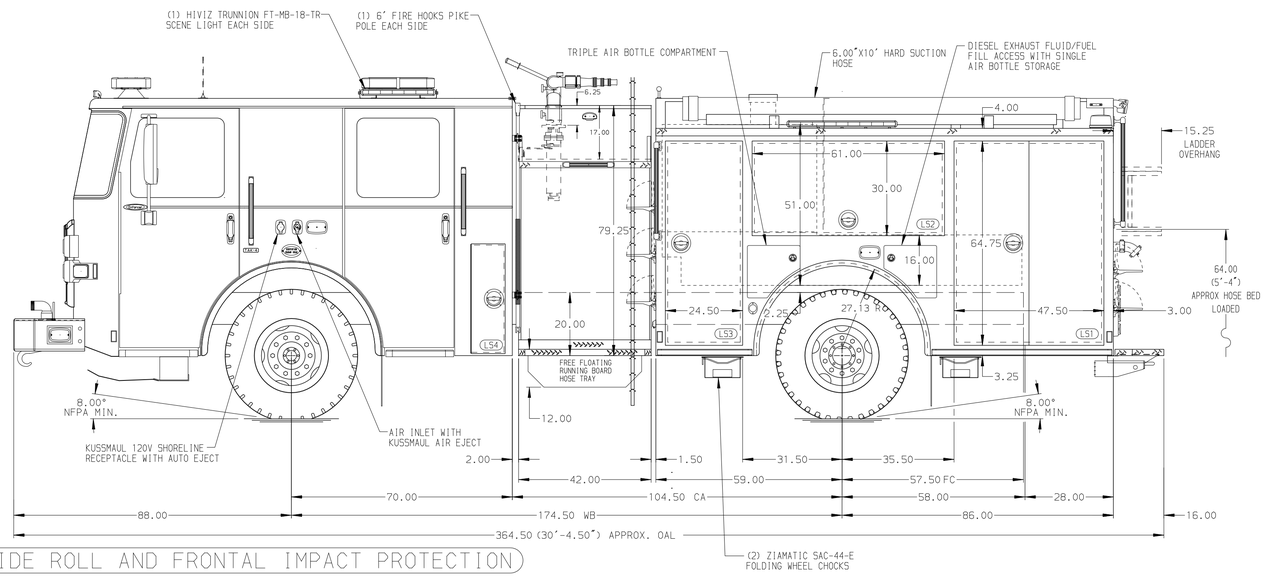
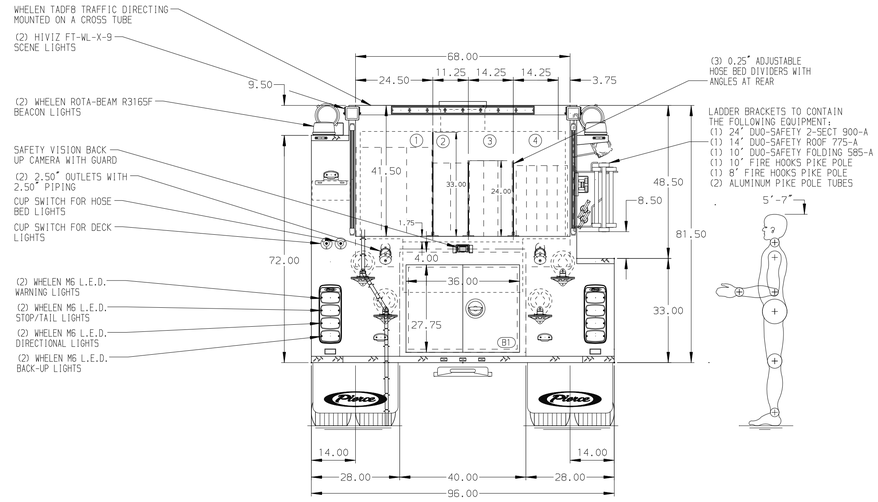



HOSEBED CAPACITIES

1. 800' OF 5.00" D.J. POLY HOSE
2. 425' OF 3.00" D.J. POLY HOSE
3. 650' OF 2.50" D.J. POLY HOSE
4. 1150' OF 1.75" D.J. POLY HOSE

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON DS PUMP PANEL
2. INVERTER LOCATED BEHIND THE DRIVER SEAT
3. ONE 120V DUPLEX RECEPTACLE IN CAB PER ORDER
4. TWO 120V DUPLEX RECEPTACLES LOCATED PER ORDER

| REV | DATE | BY | CH |
|---|---|---|---|
| V | 09APR26 | BTH | COS |
| B | 26MAR26 | BTH | COS |
| V | 27FEB26 | BTH | COS |

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

PIERCE MANUFACTURING INC.

TITLE: 1250GPM, 650G WATER TANK 145" 2G PUMPER, HARD WIRED
FOR: LAKEWOOD FIRE DISTRICT #1 LAKEWOOD, NJ
DWG NO.: 40655AD

JOB NO.: 40655
SCALE: 1:24
DATE:
DRAWN BY: BTH 29DEC25
CHECKED BY: SZE 29DEC25
SHEET SIZE: D
SHEET NO.: 1 OF 1

View File Created 09-APR-2026 11:22:08