

Short Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

AXLE, REAR
24,000 Lb Dana 523-190 Axle

450 HP Cummins L9 Engine

ALLison 6th Gen, 3000 EVS P

19" Extended Steel Painted

7010 Enforcer Cab

500 Gallon New York Style Poly Tank

500 Gallons of Water

Foam Cell Not Required

30.75" FF Rollup Rear Comp

140" Rollup Full Height Front & Rear

140" Rollup Low

48" Control Zone Side Mount

2000 GPM QMAX-200

(2) 250' of 1.75" D.J. Poly Required

Crosslay Not Required

SpeedLays Not Required

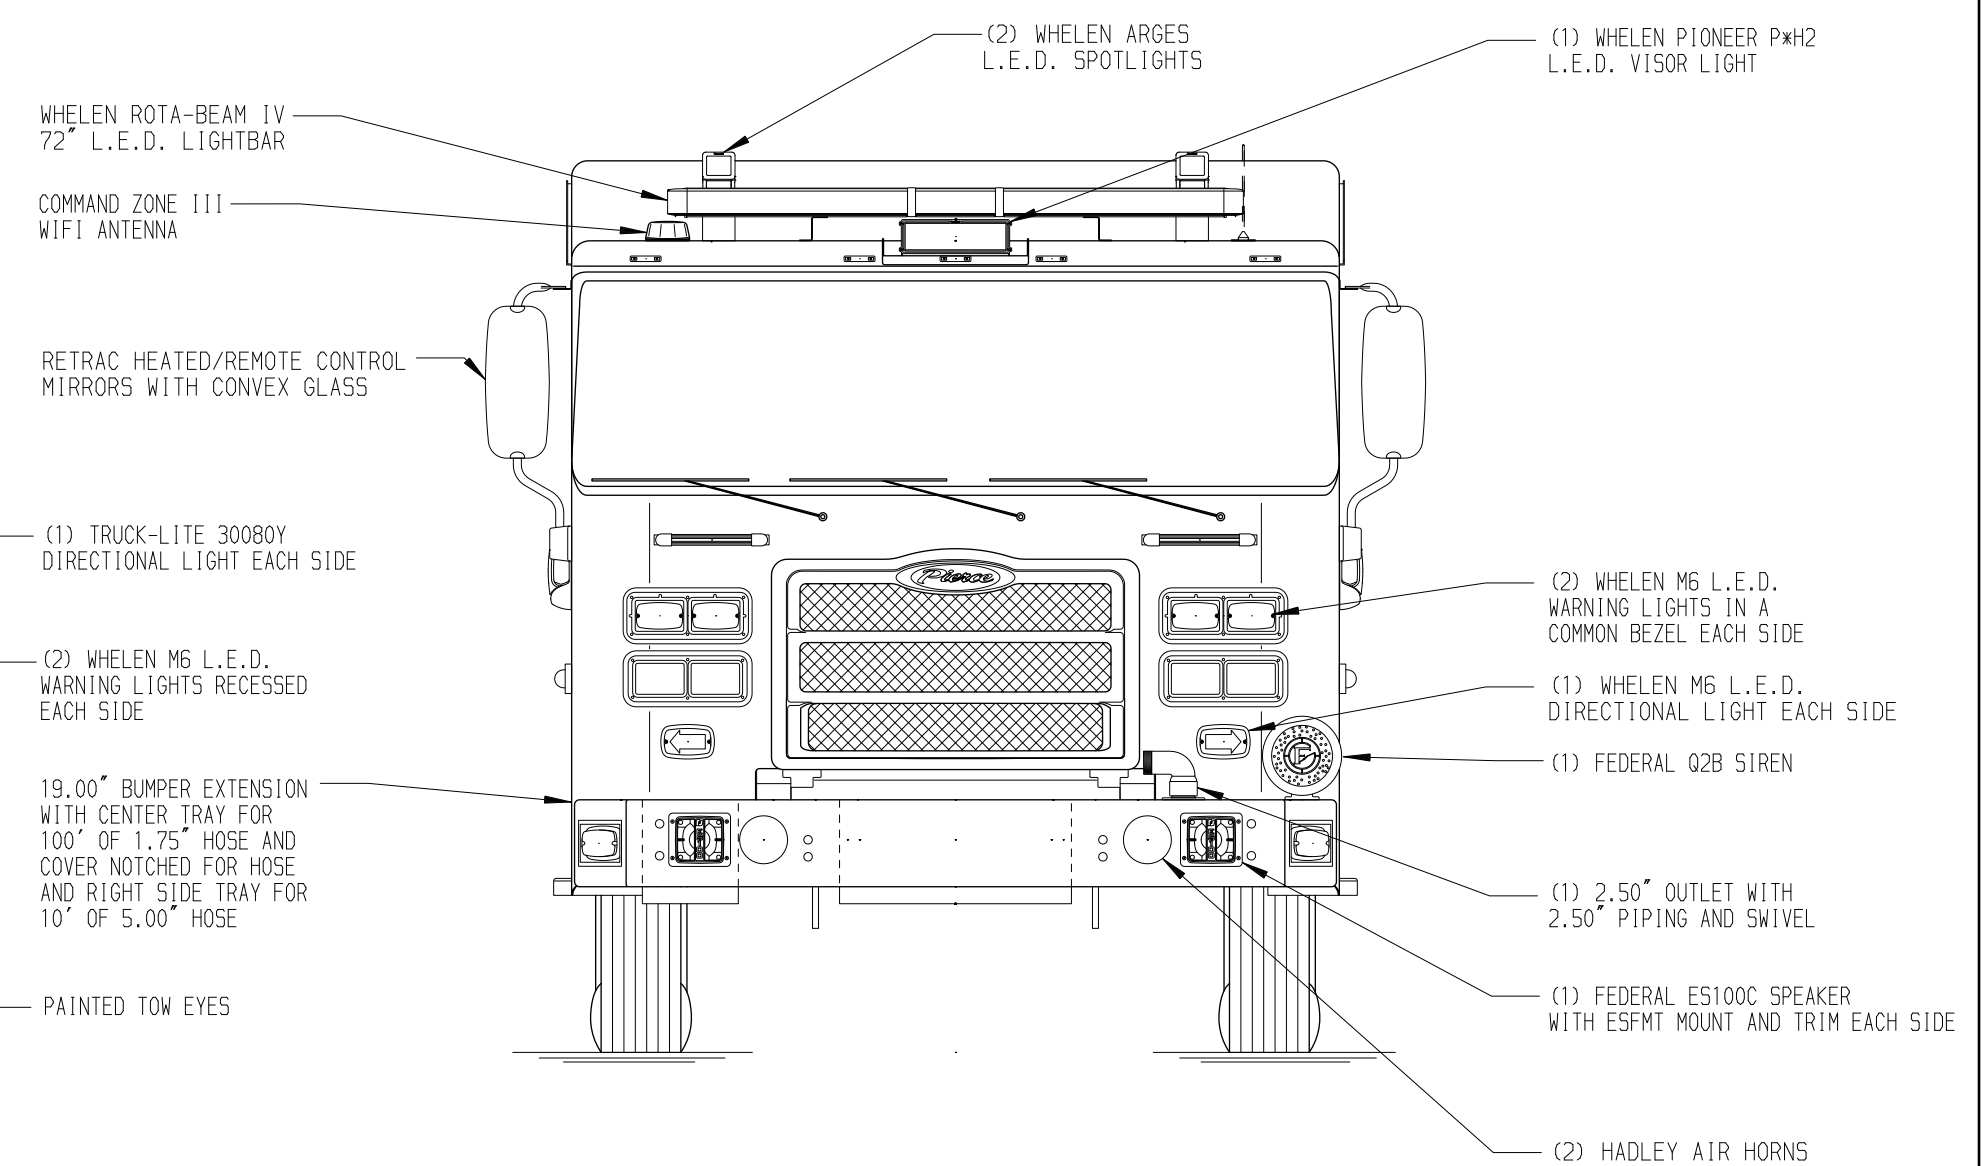
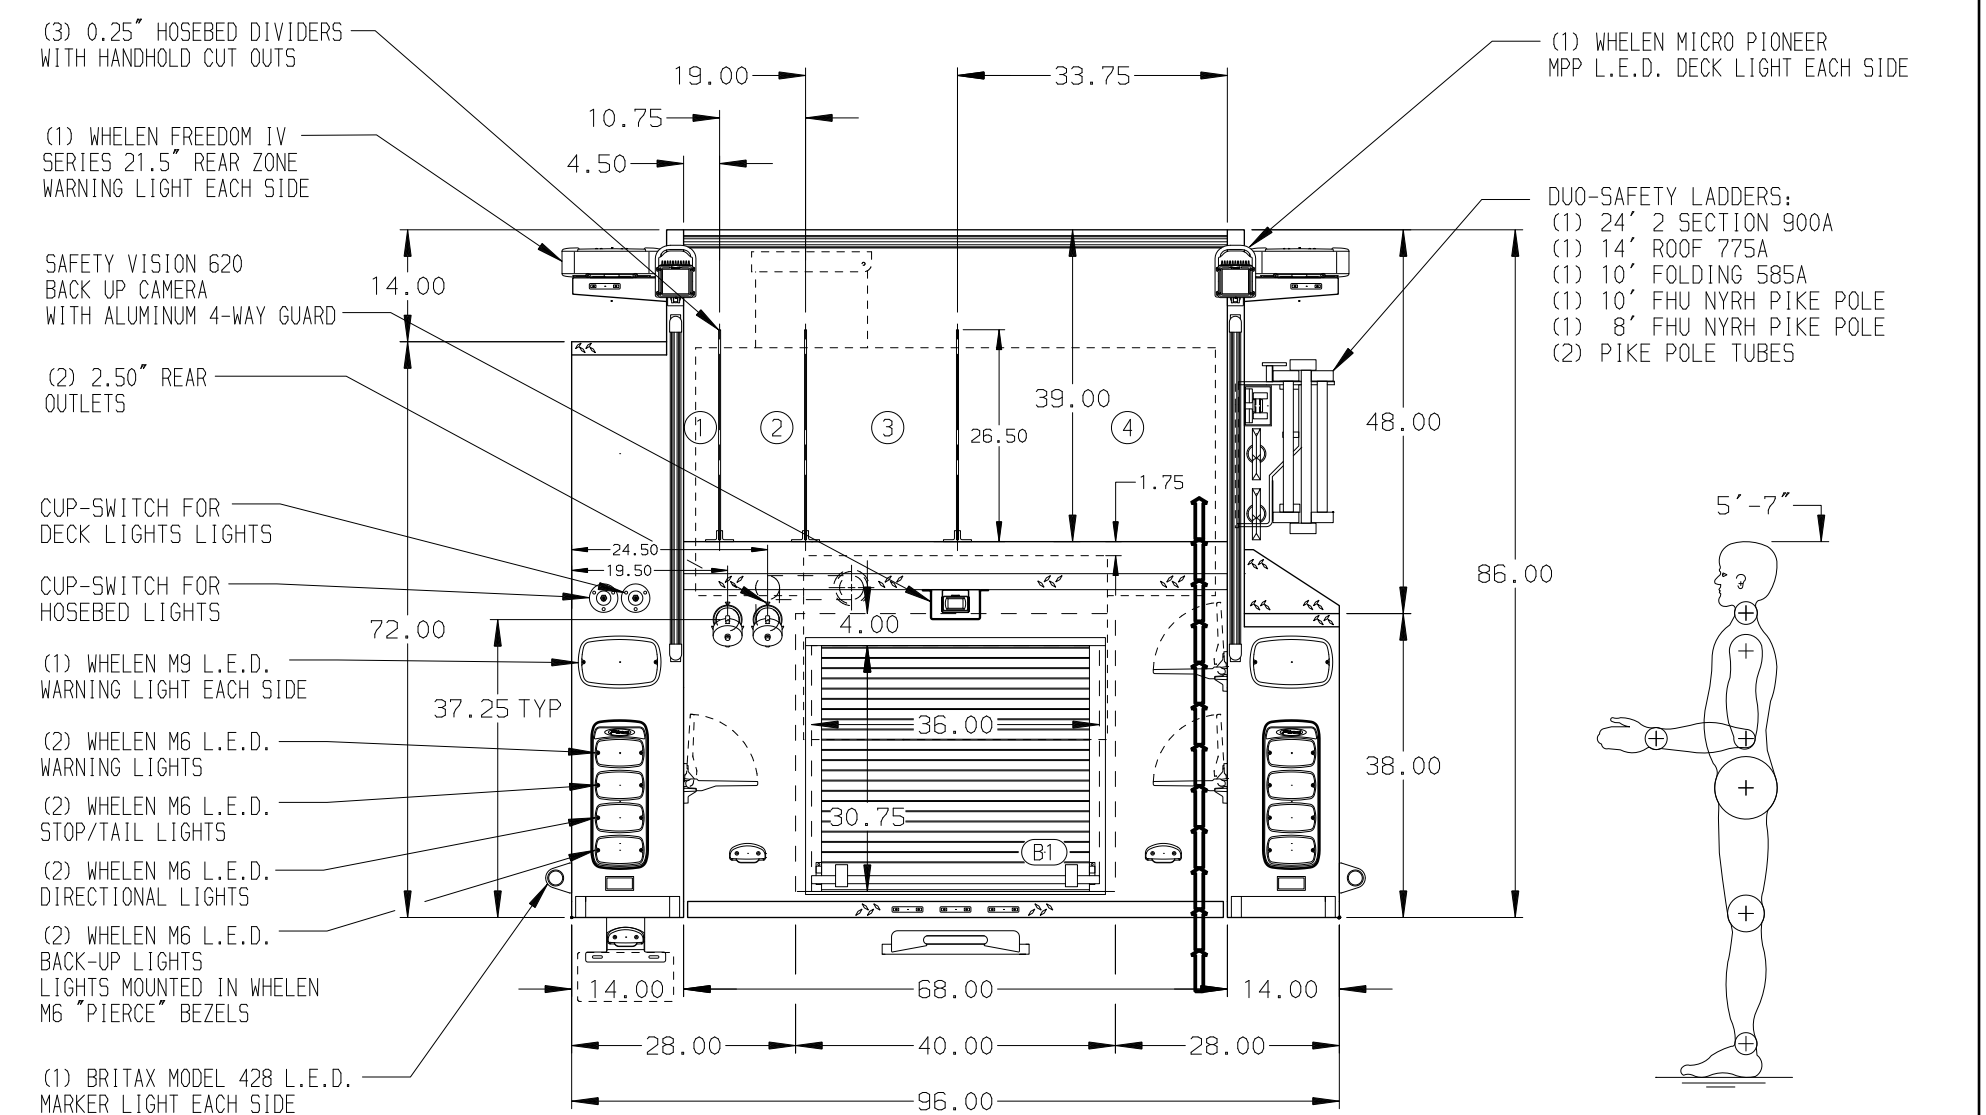
Generator Not Required

Foam System Not Required

Side Roll and Frontal Impact Protection

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING LOCATED IN DRIVER'S SIDE STEP WELL
2. ONSHOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
3. SINGLE POINT LUBE SYSTEM PUMP LOCATED PER SHOP ORDER
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
6. FOUR 120V RECEPTACLES LOCATED IN CAB PER ORDER.

BED 4

MANUFACTURING INC.

OB NO.	40786
--------	-------

SCALE	DATE
1.24	

DRAWN BY	01 NOV 24
----------	-----------

CHECKED BY	04NOV24
------------	---------

SHEET SIZE	SHEET NO.
------------	-----------

1 OF 2

TITLE	Pierce Pumper Approval Drawing
-------	--------------------------------

TITLE	-
-------	---

FOR	Kansas City
-----	-------------

DWG NO.	40786AD-SH1
------------	-------------

				CHASSIS DATA
				MAKE
	22JAN25	BTH	JJR	PIERCE
	04DEC24	BTH	JJR	MODEL
REV	DATE	BY	CH	ENFORCER