

PUMPER
BODY

Long Stainless Steel 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS
AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

31,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

22" Extended Stainless Steel

CAB

7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY

1,020 Gallon Poly Tank

WATER CAPACITY

1,000 Gallons of Water

FOAM CELL

20 Gallon Foam Cell

COMPT, PUMPER, REAR

40.50" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

171" RollUp Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE

171" RollUp Full Height & Depth Front & Rear

FIRE SUPPRESSION
PUMPHOUSE

45" Control Zone Top Mount

PUMP

1250 GPM Waterous CSU

CROSSLAYS, 1.50"

1.50" CrossLays Not Required

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

(2) 1.50" & (1) 2.50" Std. Capacity

GENERATOR

Generator Not Required

FOAM SYSTEM


Husky 12 Single Agent Foam System

SAFETY

Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
2. MIC & SPEAKER COMPARTMENT LOCATED IN TOP MOUNT PANEL
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. BATTERY CHARGE INDICATOR LOCATED BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW
6. (2) PIKE POLE TUBES W/ (2) 6" NY PIKE POLES LOCATED IN TRANSVERSE COMPARTMENT
7. WHEEL CHOCKS AND MOUNTING BRACKETS TO BE PROVIDED BY CUSTOMER
8. KUSSMAUL AIR COMPRESSOR LOCATED BEHIND DRIVER'S SEAT

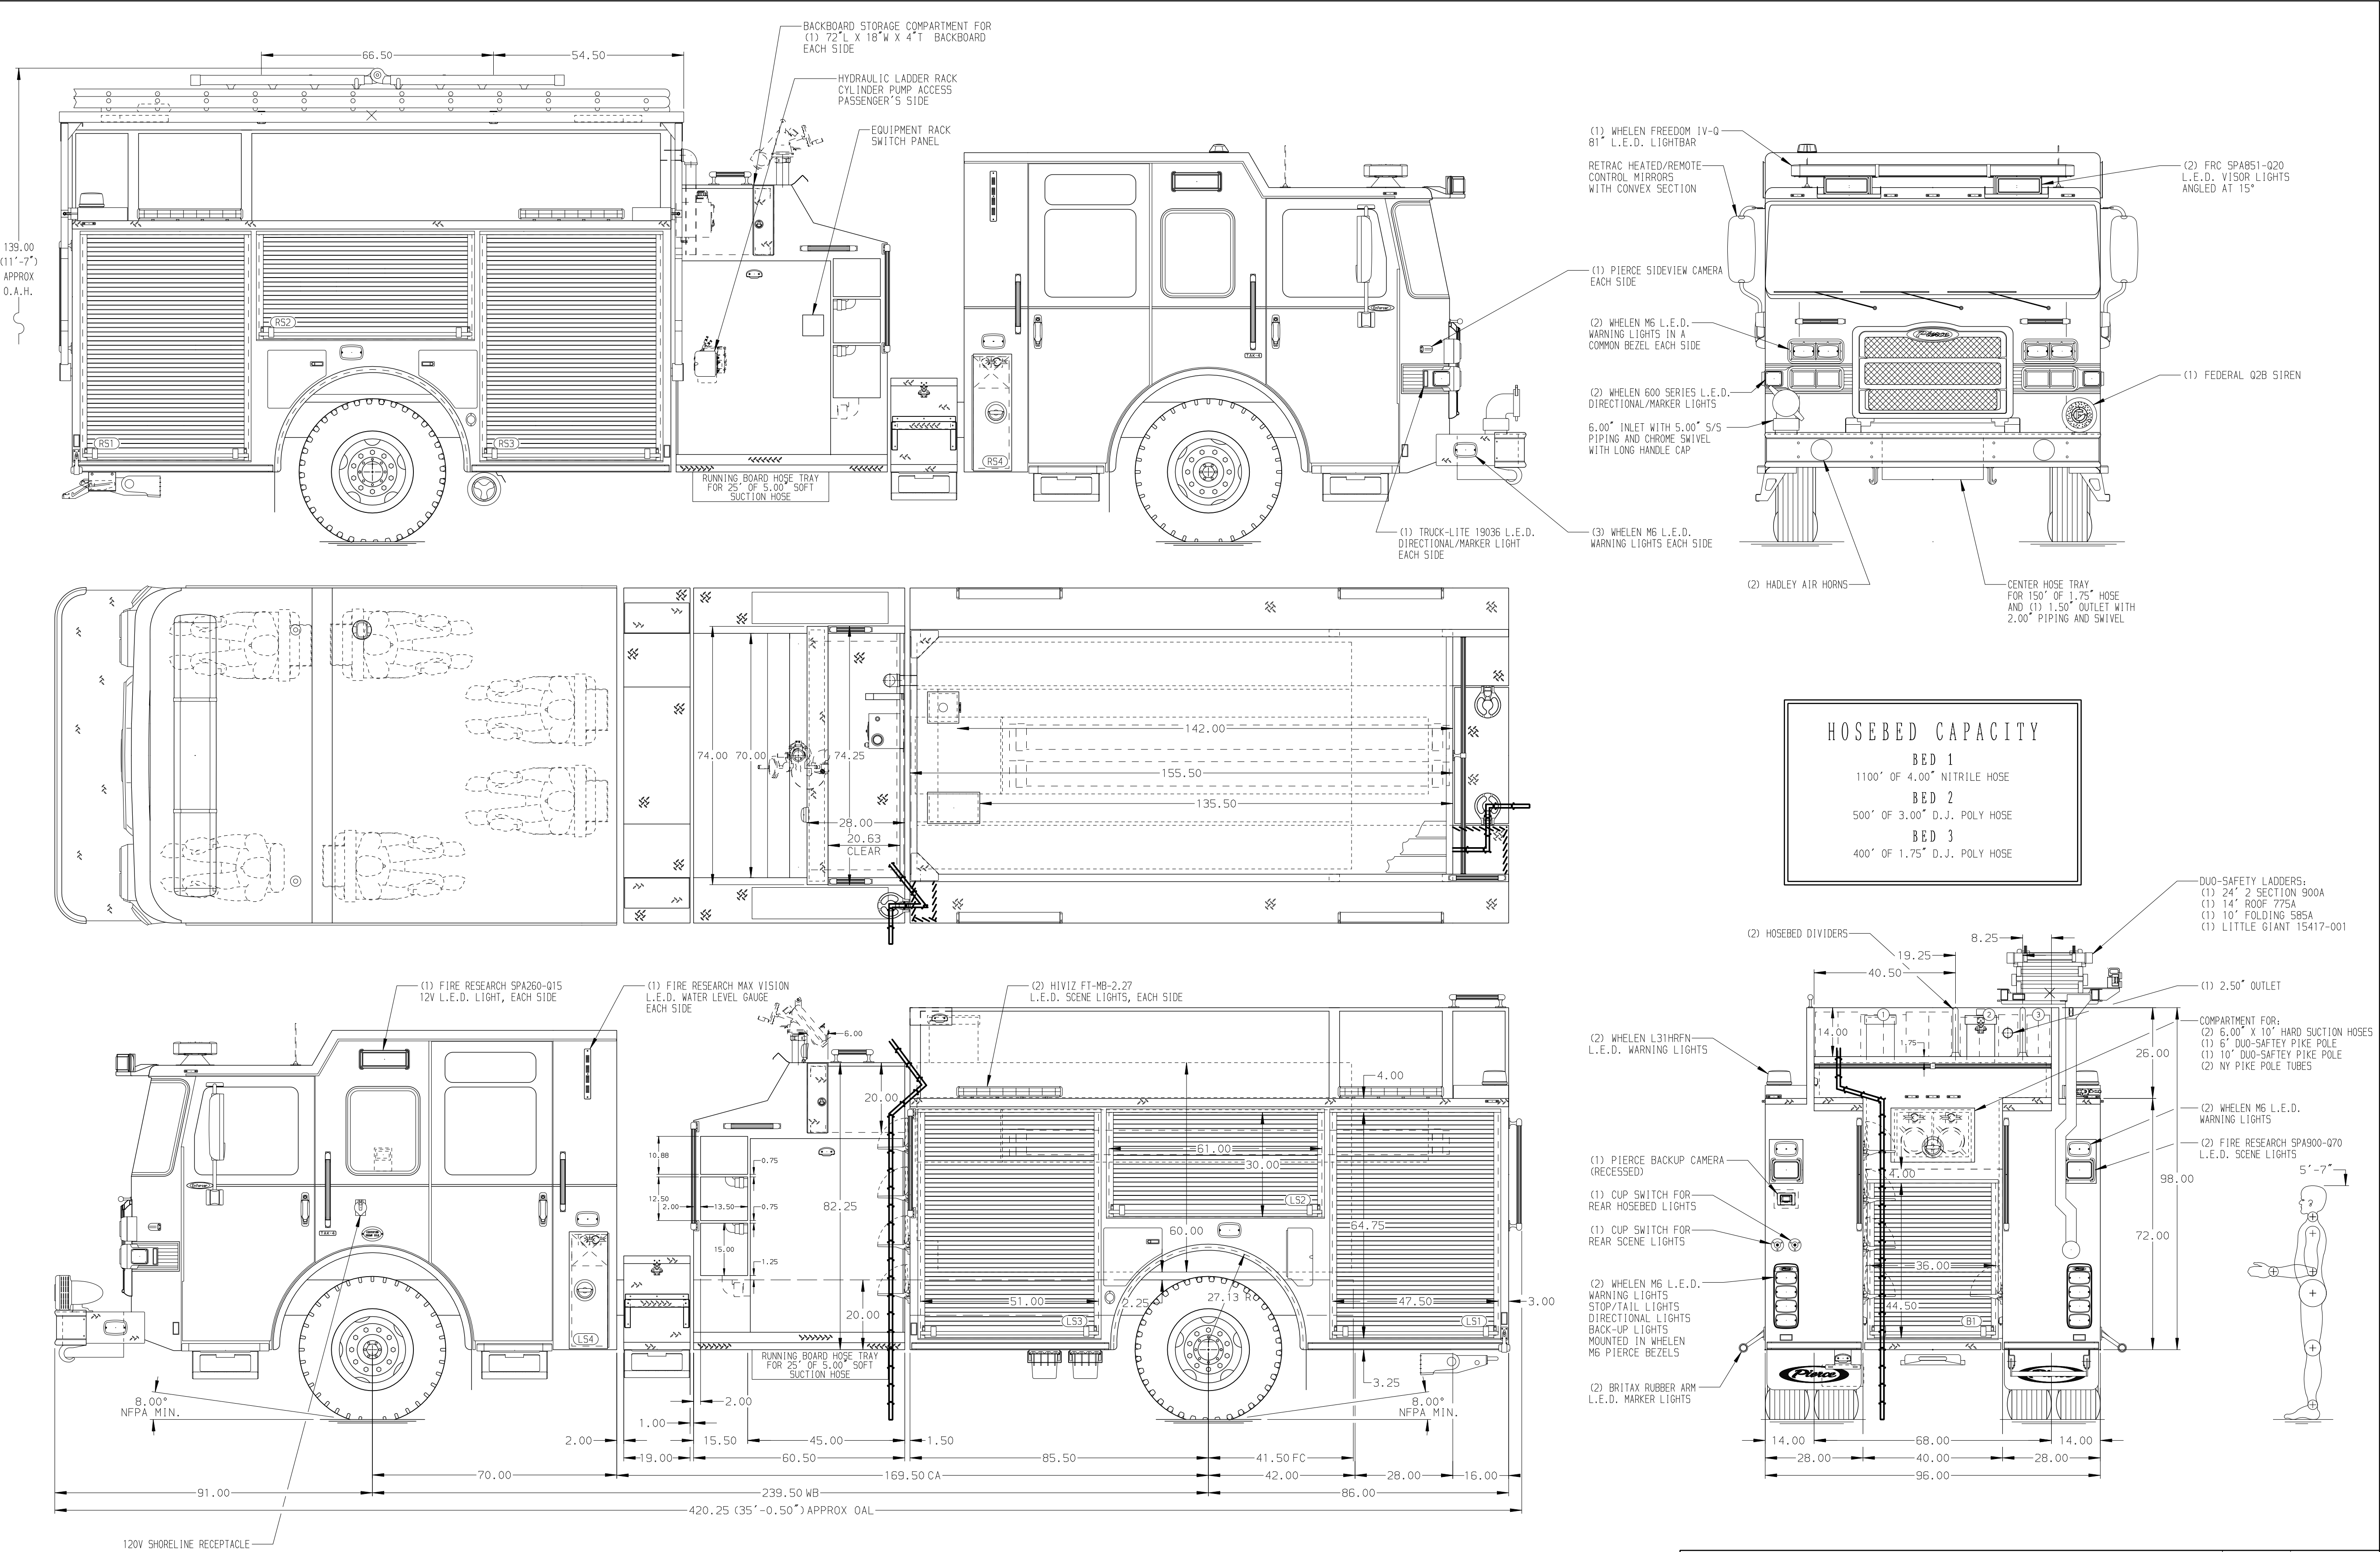

03FEB25 18DEC24 REV	JDA JDA DATE	JKR JKR BY	JKR JKR CH	CHASSIS DATA MAKE PIERCE MODEL ENFORCER	TITLE	Pierce Pumper Approval Drawing
					FOR	Churchville Volunteer Fire Department
					DWG NO.	40808AD-SH1
					SHEET NO.	1 OF 2