

Saber FR Chassis

31,000 Lb Dana Axle

450 HP Cummins L9 Engine

ALLison 6th Gen, 3000 EVS P

Non Extended Stainless Steel

6010 Saber FR Cab

1000 Gallon Poly Tank

1000 Gallons of Water

Foam Cell Not Required

44.50" FF Rollup Rear Compt

161" Rollup Full Height Front & Rear FDLER

161" Rollup Full Height Front & Rear FDLER

45" Control Zone Top Mount

1500 GPM Waterous CSU

1.50" Crosslays Not Required

2.50" Crosslay Not Required





(2) 1.50" & (1) 2.50" Std. Capacity

Generator Not Required

Foam System Not Required

Side Roll and Frontal Impact Protection

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

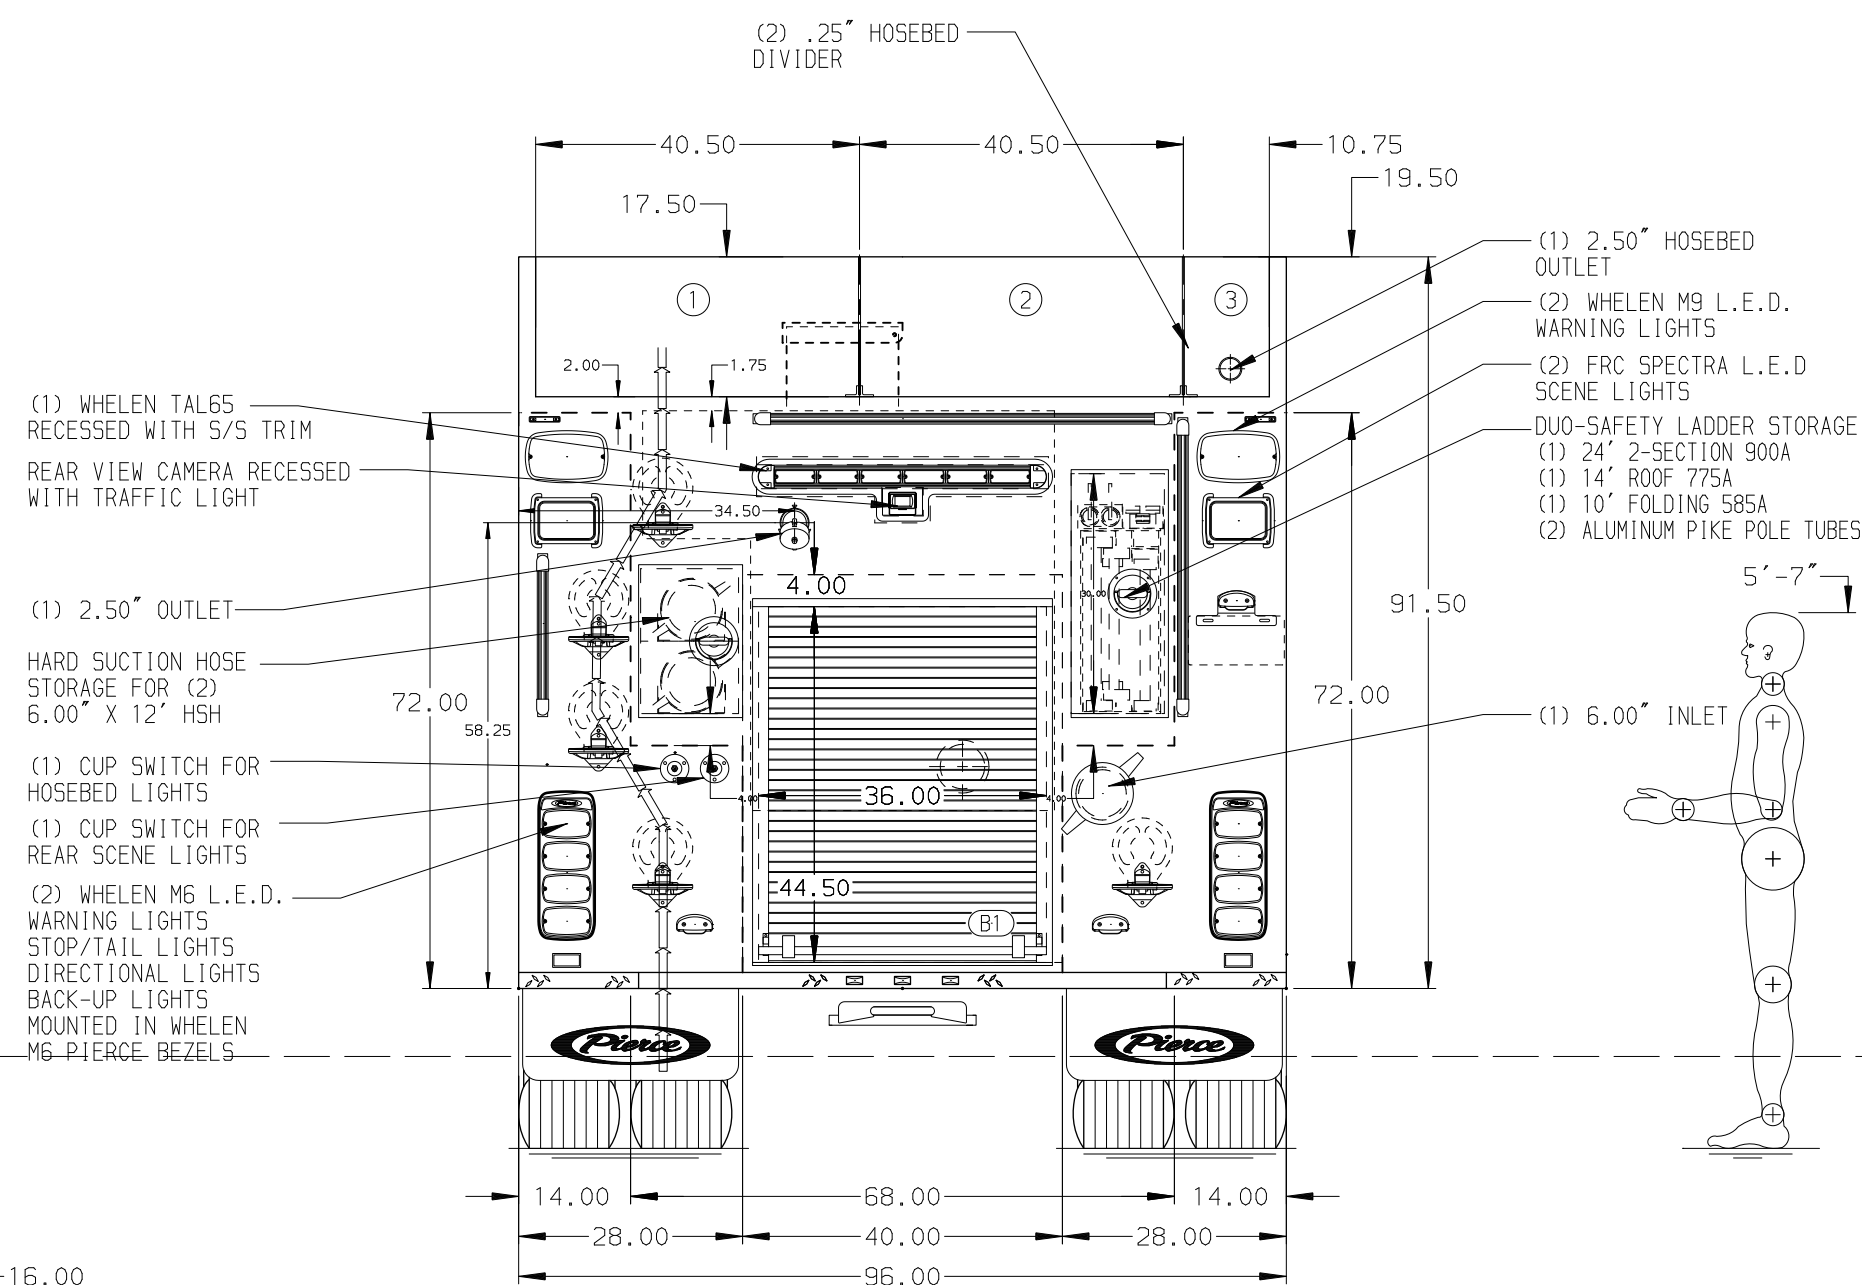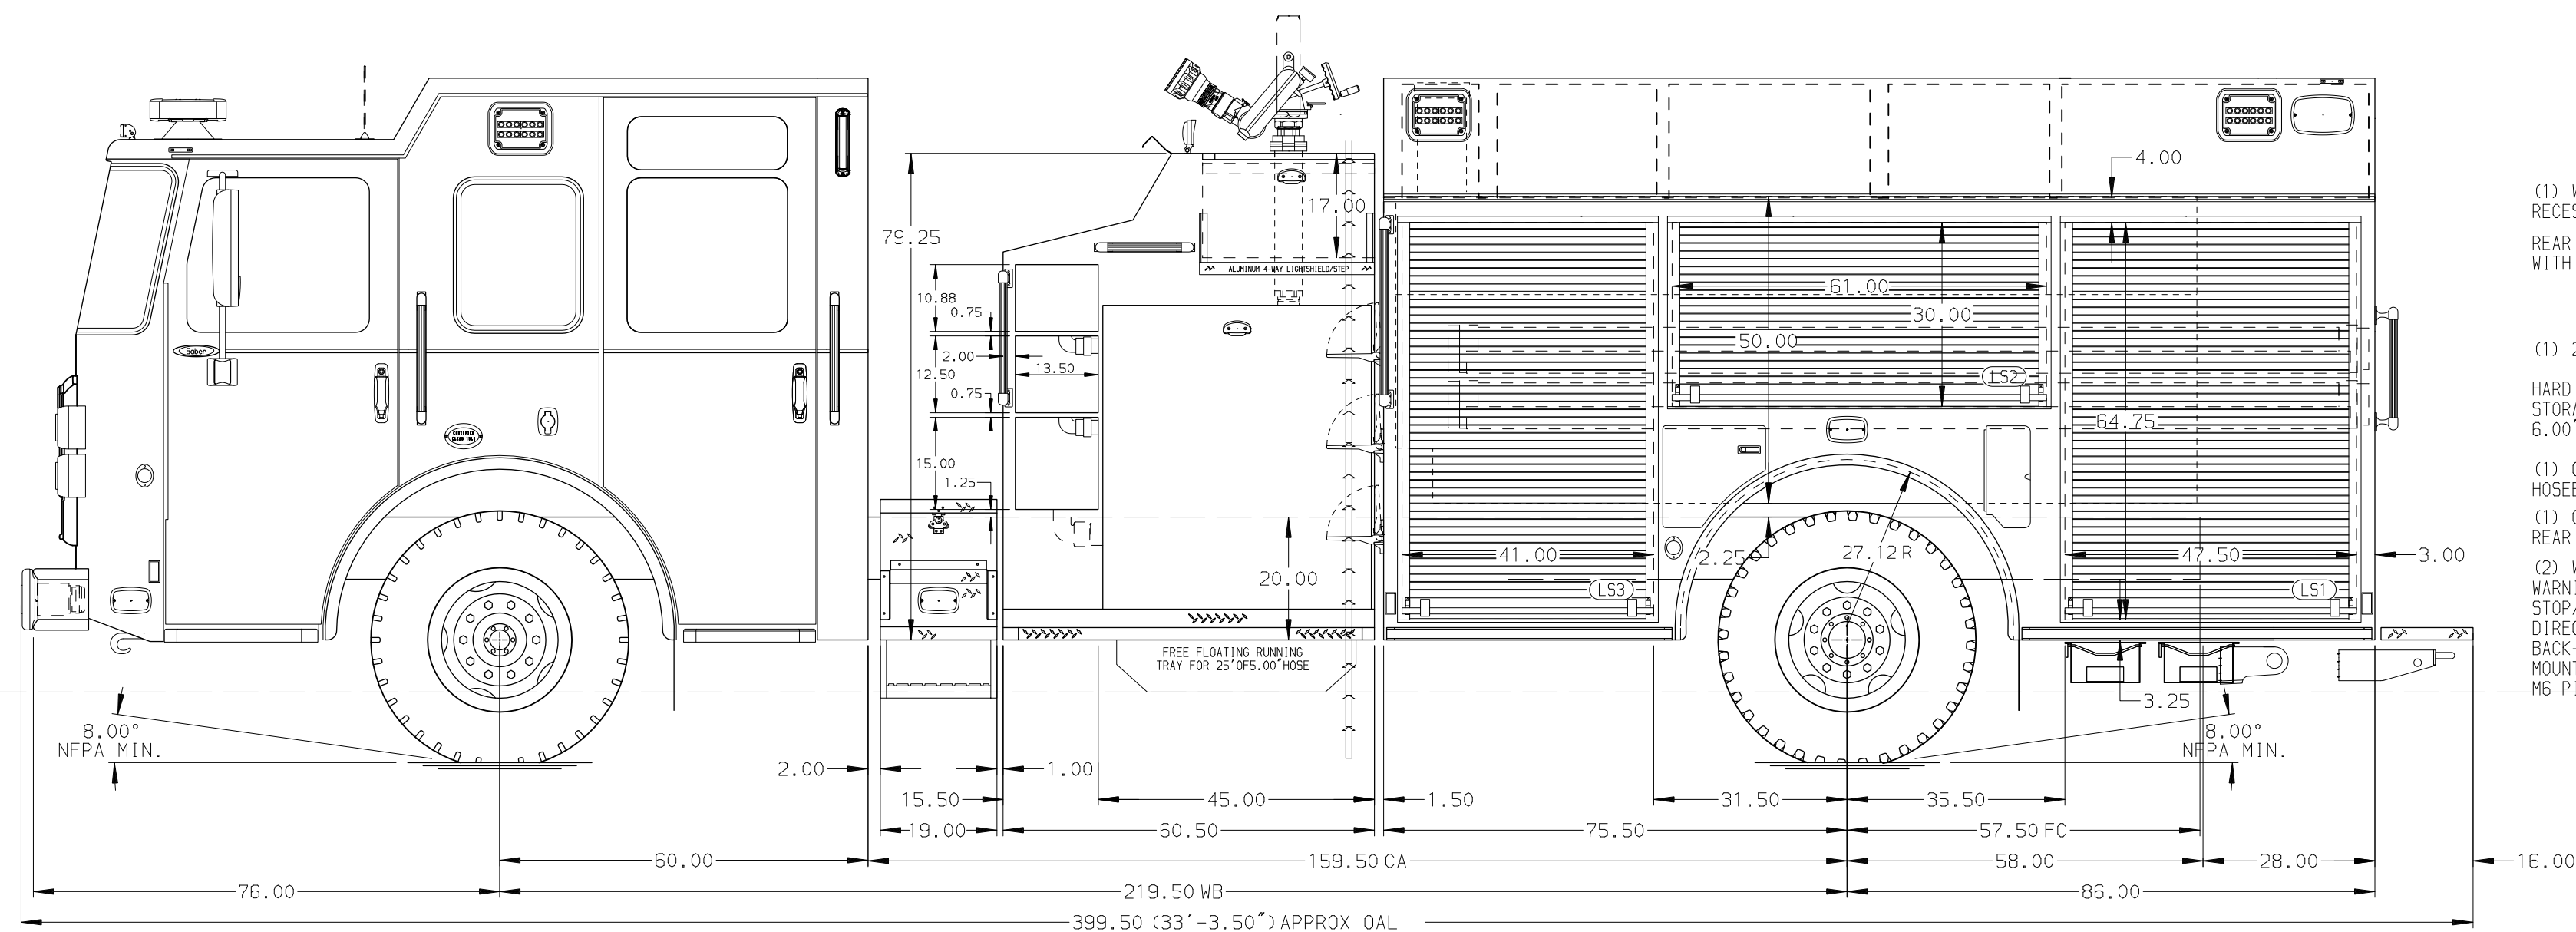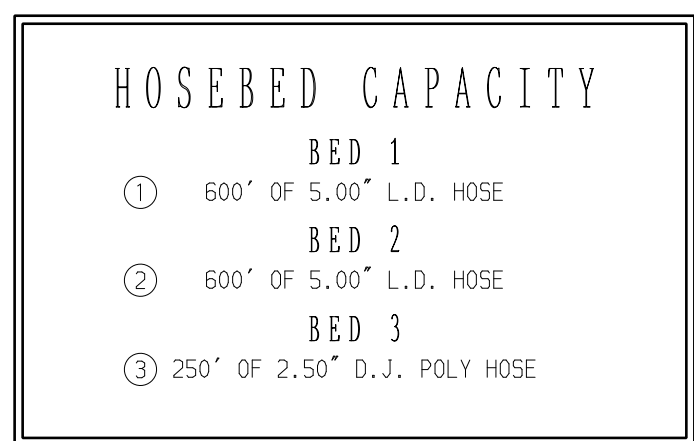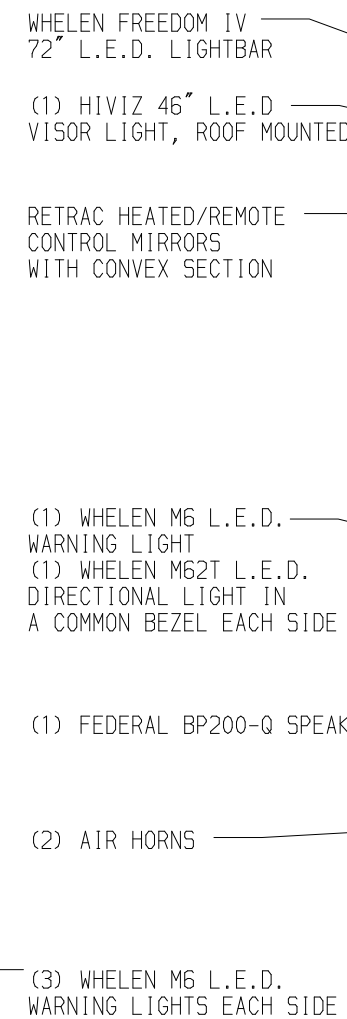

CUSTOMER APPROVAL					MANUFACTURING INC.					JOB NO.	40892	
APPROVED BY: _____										SCALE	1:24	DATE
DATE: _____					TITLE	Pierce Pumper Approval Drawing				DRAWN BY		
				CHASSIS DATA	-	RTR					08APR24	
				MAKE		FOR	Varick Volunteer Fire Company				CHECKED BY	
				PIERCE	-						MMF	10APR24
	12JUN24	WHO	CCS	MODEL	DWG	40892AD					SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	SABER FR	NO.						D	1 OF 1