
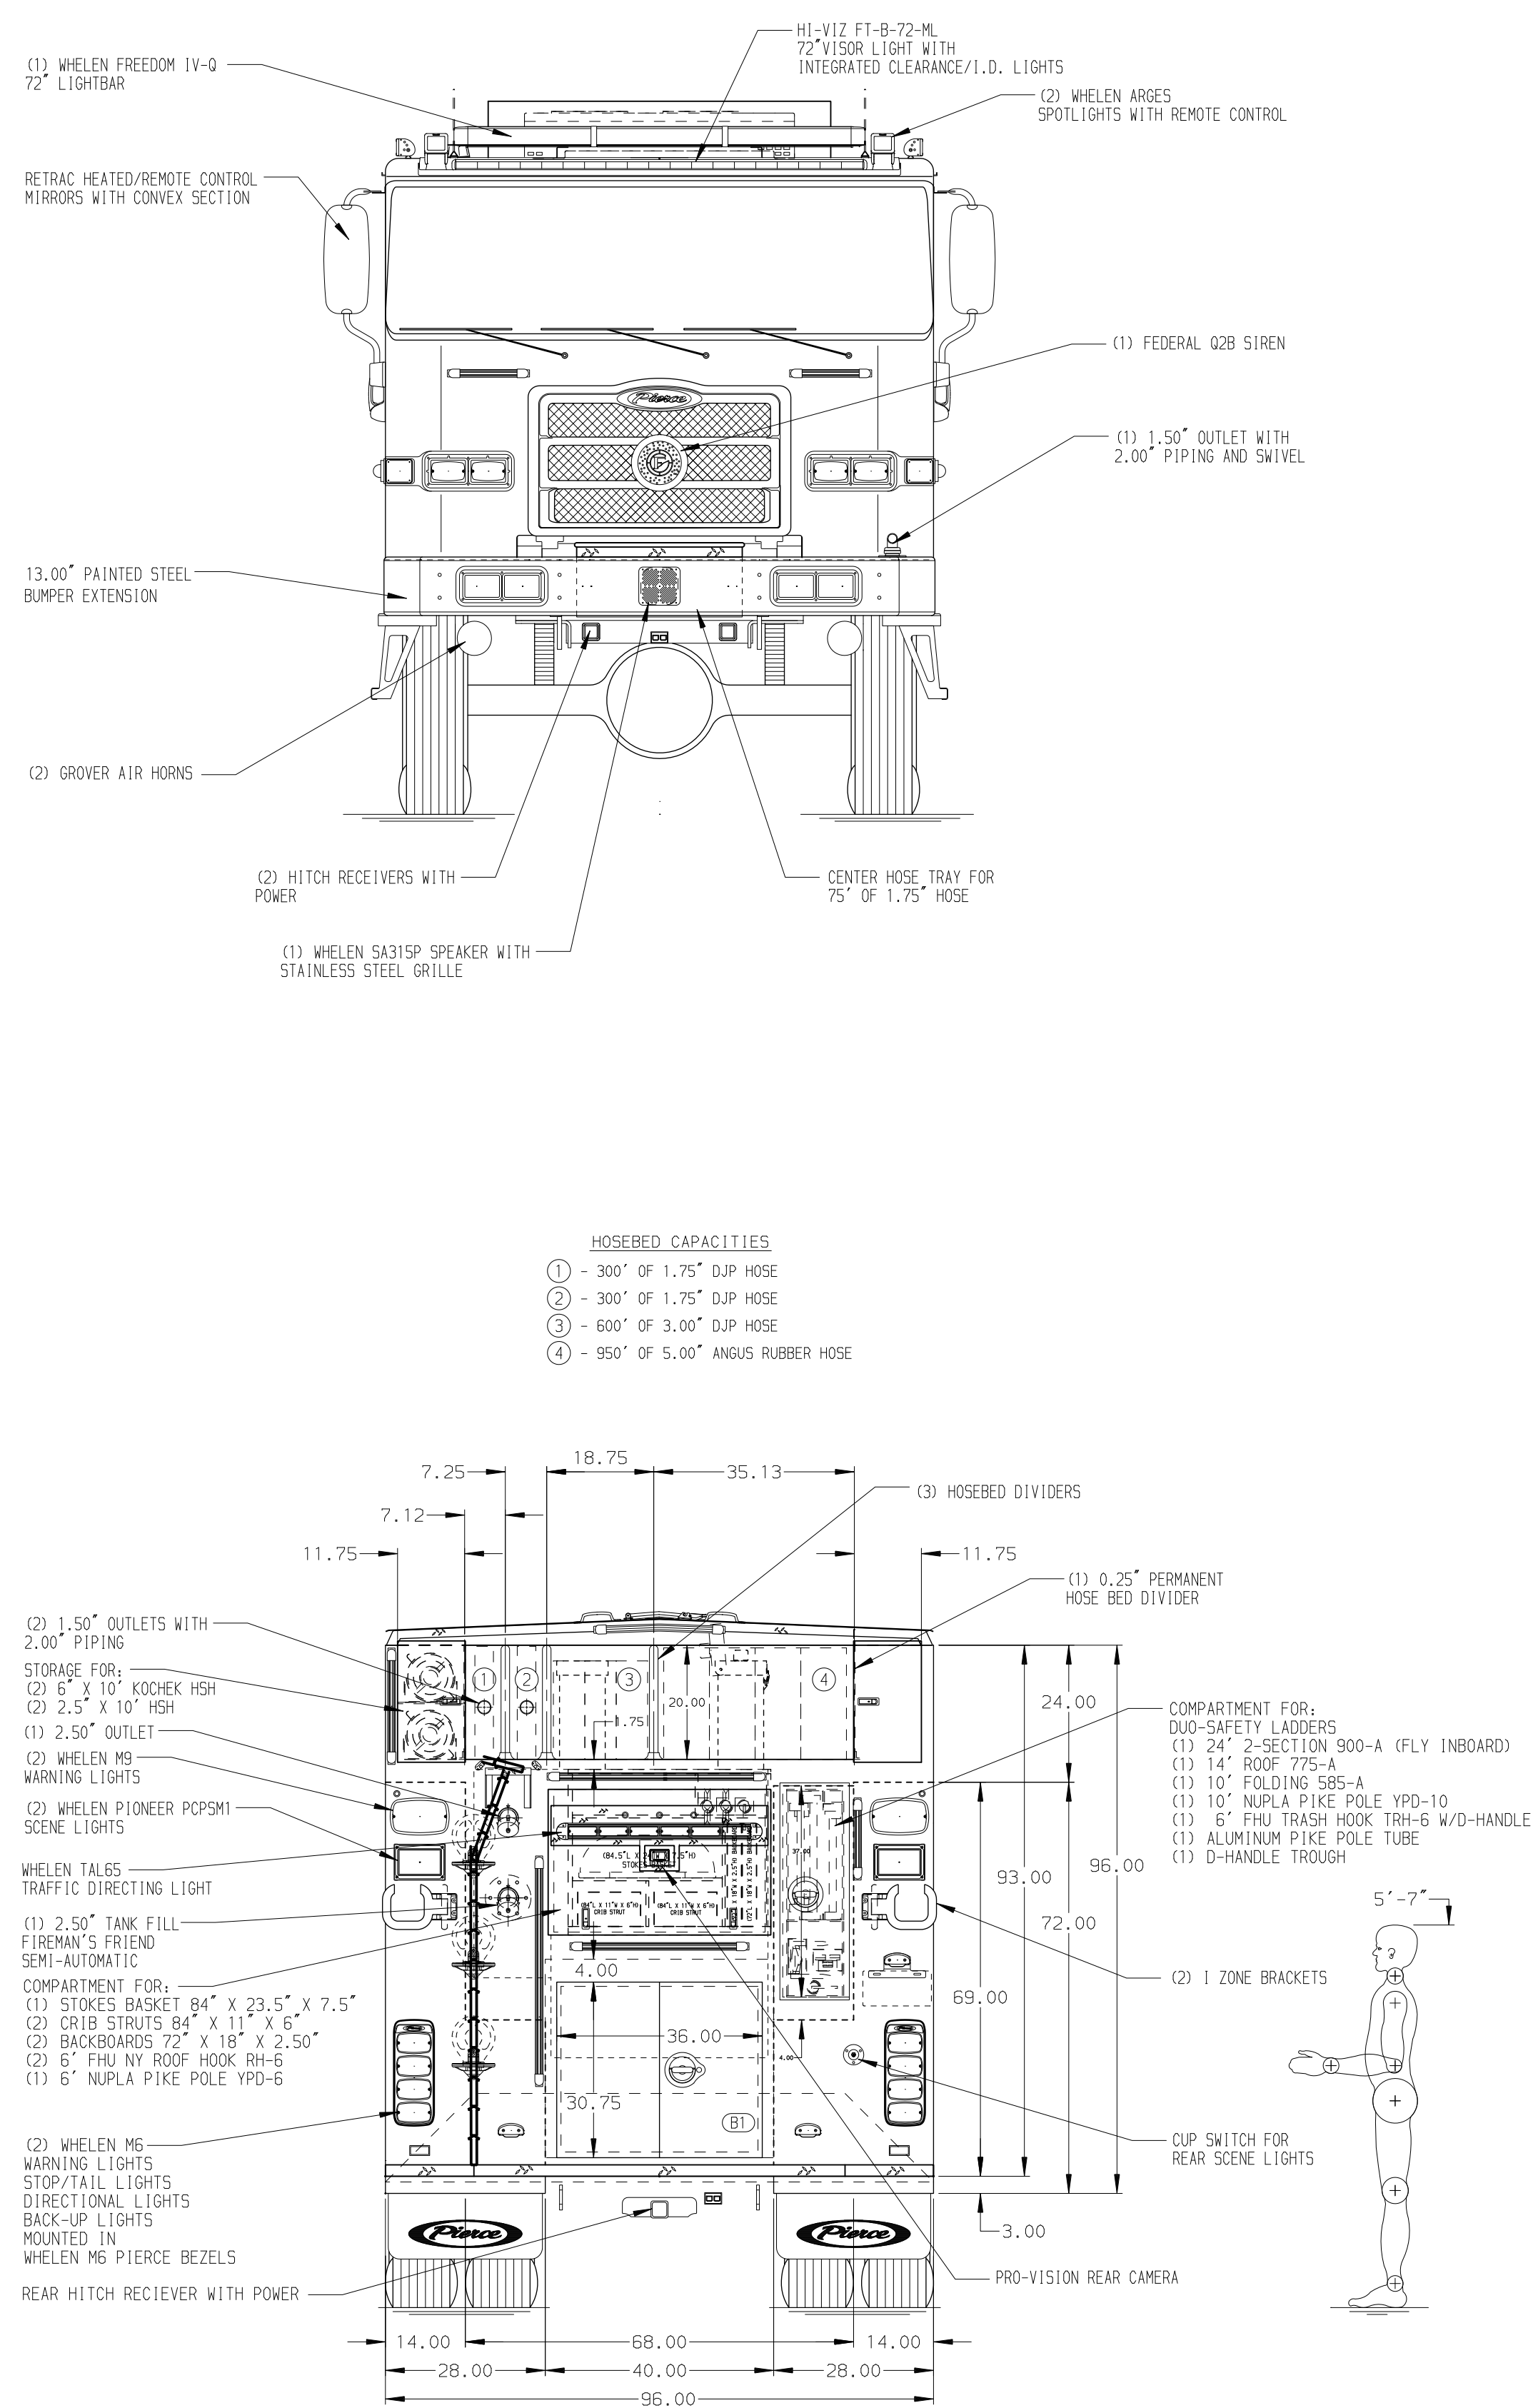


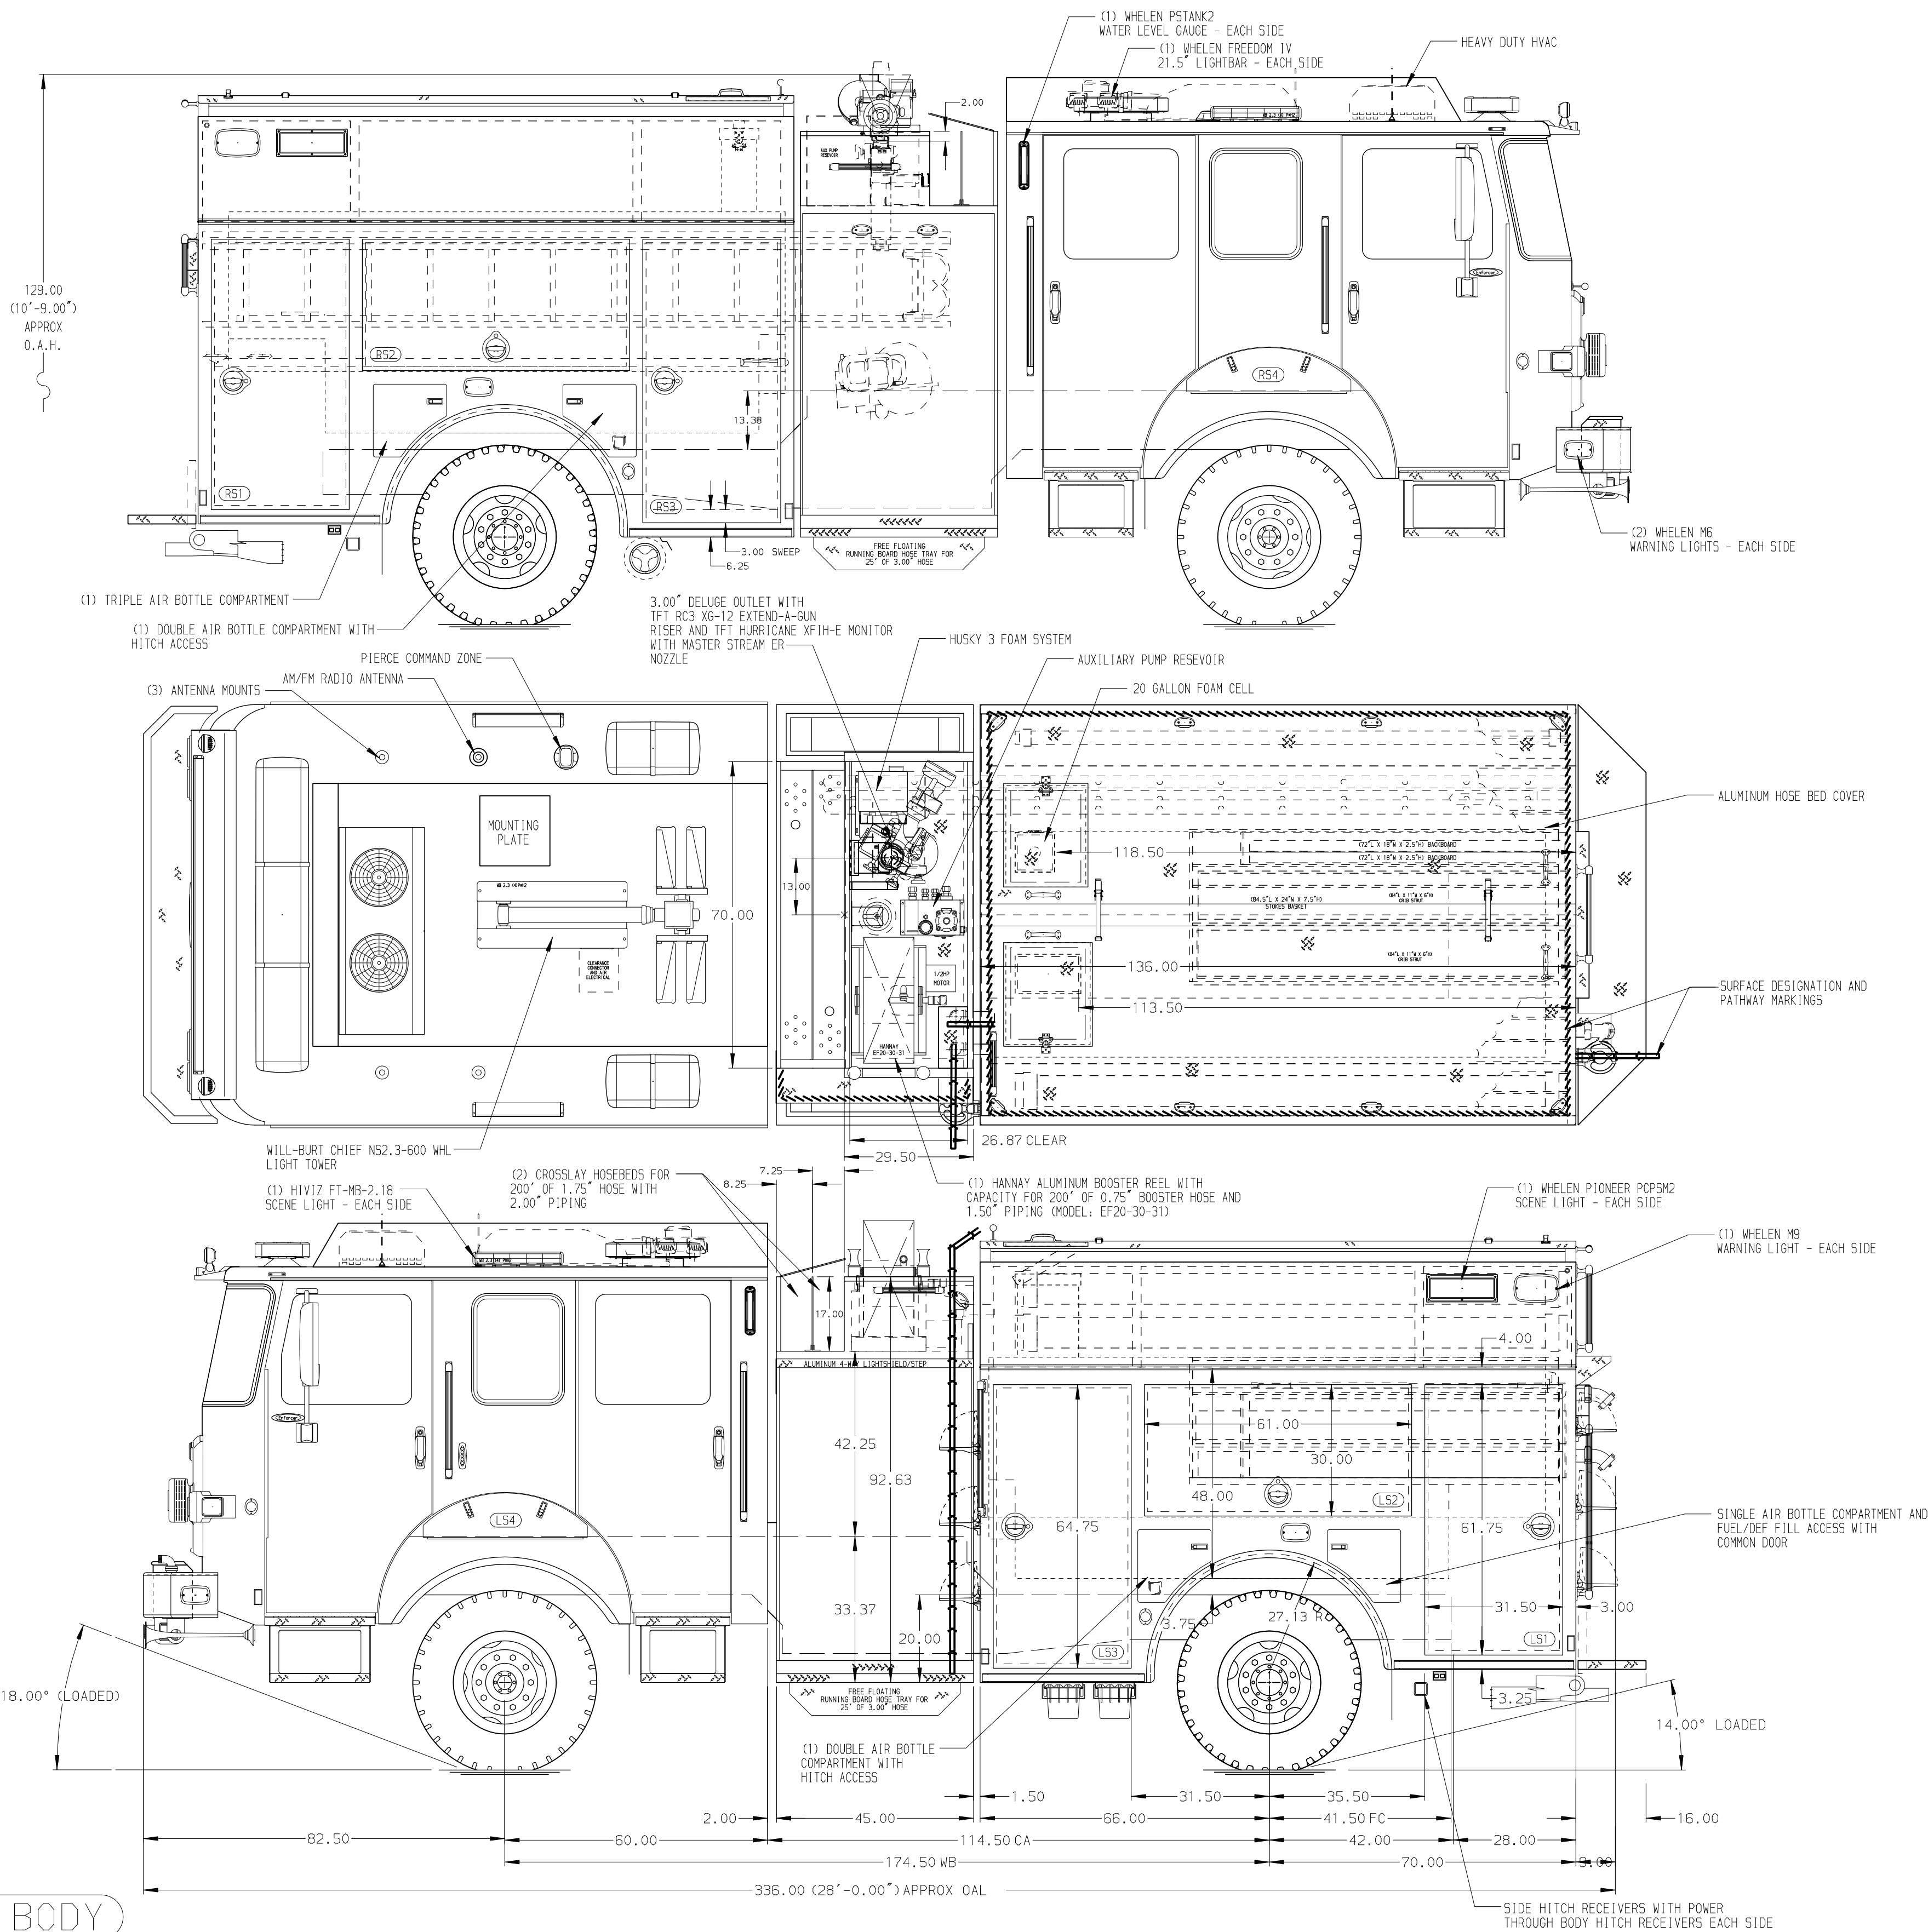

- HOSEBED CAPACITIES
- ① - 300' OF 1.75" DJP HOSE
 - ② - 300' OF 1.75" DJP HOSE
 - ③ - 600' OF 3.00" DJP HOSE
 - ④ - 950' OF 5.00" ANGUS RUBBER HOSE

ALUMINUM BODY

MAXIMUM O.A.H. 129.00"

MAXIMUM O.A.L. 336.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

4x4 STEP FRAME

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. TWO WORDEN HWG-SB SUPER GRIPPER WHEEL CHOCKS
- 2. KUSSMAUL AIR INLET WITH RECESSED MOUNT AND WEATHERPROOF COVER LOCATED AT DRIVER'S SIDE PUMP PANEL
- 3. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT PER ORDER
- 4. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
- 5. KUSSMAUL SHORELINE LOCATED AT DRIVER'S SIDE PUMP PANEL
- 6. AUXILIARY PUMP LOCATED INSIDE PUMP HOUSE AREA

18AUG26	LST	EGO	CHASSIS DATA
14JUL26	LST	EGO	MAKE
25FEB26	LST	EGO	PIERCE
13FEB26	LST	EGO	MODEL
20JAN26	LST	EGO	ENFORCER
REV	DATE	BY	CH



MANUFACTURING INC.

TITLE 1500GPM, 750G TANK, 730G WATER, 20G FOAM
FOR 136" PUMPER BODY, 4X4 STEP FRAME, MUX
EBBETTS PASS FIRE DISTRICT
ARNOLD, CALIFORNIA

DWG NO. 40901AD-SH1

JOB NO.	40901
SCALE	1:24
DATE	
DRAWN BY	SAM
CHECKED BY	EGO
SHEET NO.	1 OF 2