


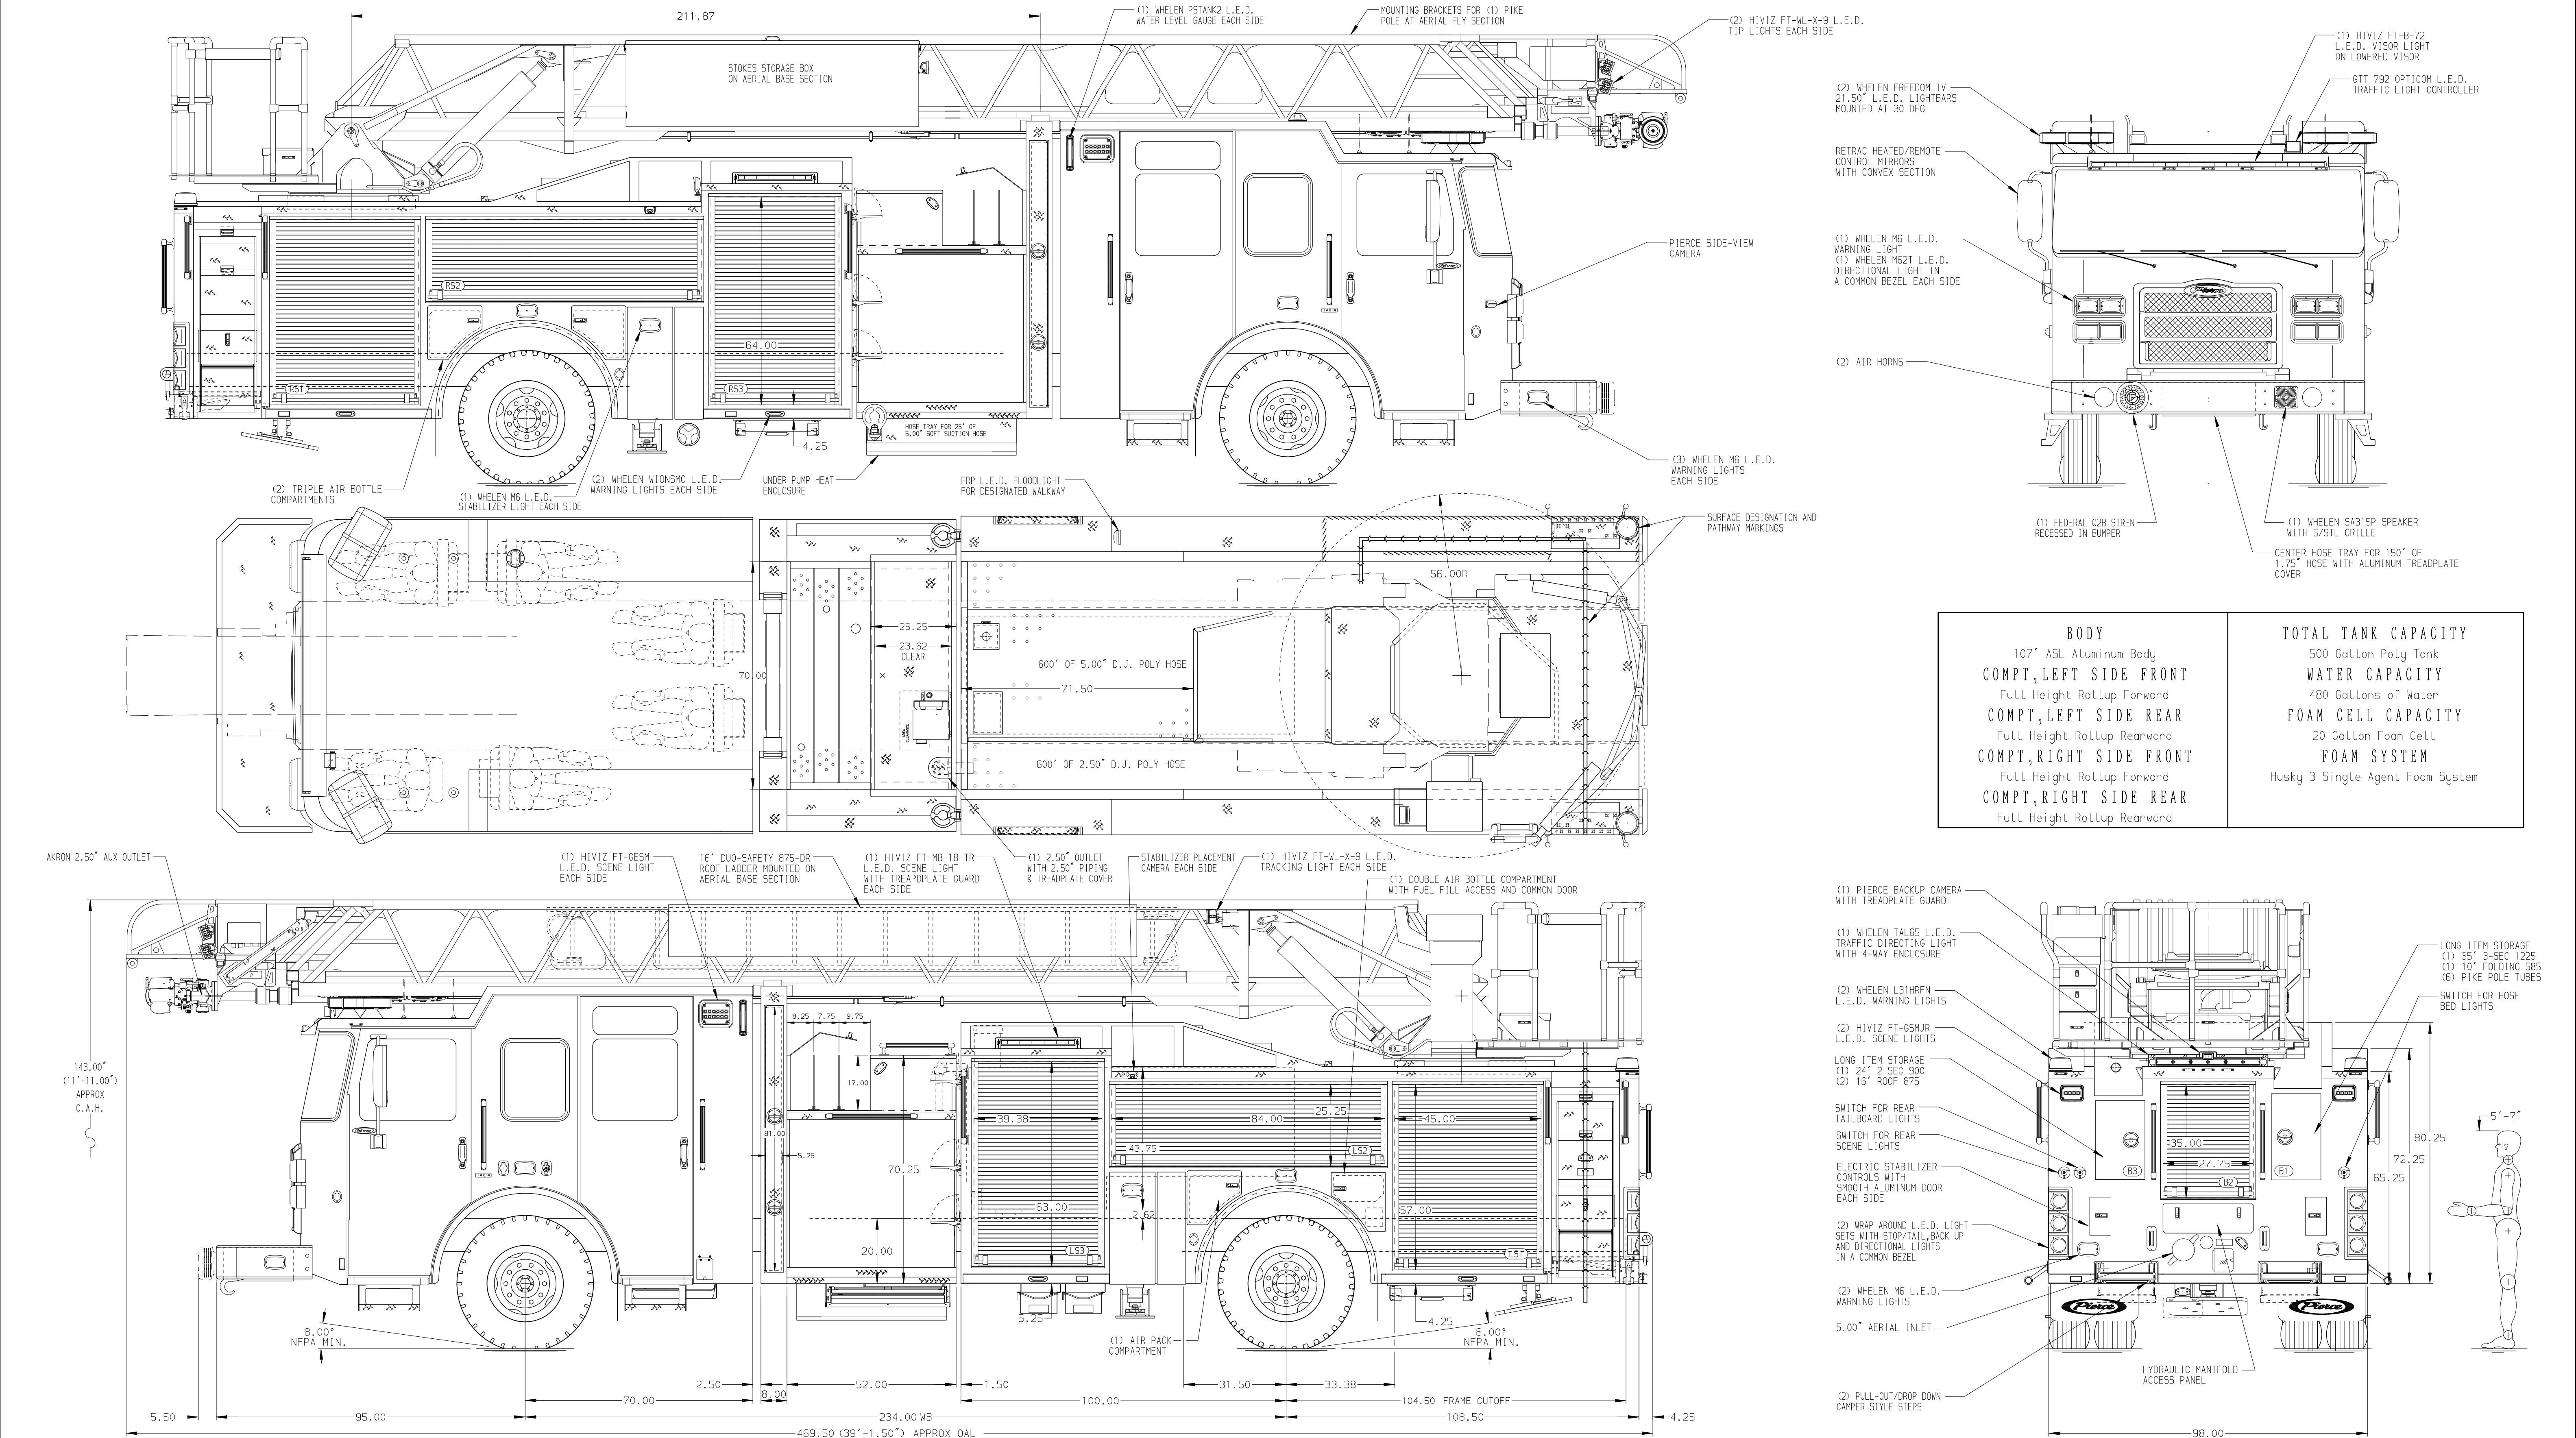

BODY 107' ASL Aluminum Body	TOTAL TANK CAPACITY 500 Gallon Poly Tank
COMPT,LEFT SIDE FRONT Full Height Rollup Forward	WATER CAPACITY 480 Gallons of Water
COMPT,LEFT SIDE REAR Full Height Rollup Rearward	FOAM CELL CAPACITY 20 Gallon Foam Cell
COMPT,RIGHT SIDE FRONT Full Height Rollup Forward	FOAM SYSTEM Husky 3 Single Agent Foam System
COMPT,RIGHT SIDE REAR Full Height Rollup Rearward	

CHASSIS Enforcer Chassis	CAB 7010 Notched Enforcer Cab	AXLE,FRONT,CUSTOM 24,000 Lb TAK-4 Axle	TRANSMISSION Allison 6th Gen, 4000 EV5 P	PUMPHOUSE 52" Control Zone Side Mount	CROSSLAYS,1.50" (2) 1.50" Standard Capacity	SPEEDLAYS Speedlays Not Required	SAFETY Side Roll and Frontal Impact Protection	Pierce MANUFACTURING INC.	JOB NO. 40931
ENGINE 510 HP Paccar MX13 Engine	BUMPER 26" Extended Painted Steel	AXLE,REAR 33,500 Lb Meritor Axle		PUMP 2000 GPM Waterous CSU	CROSSLAYS,2.50" (1) 2.50" Standard Capacity	GENERATOR Generator Not Required			SCALE 1:24 DATE
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.									DRAWN BY ANZ 12SEP24
1. NO LIMITED RETRACTION REQUIRED 2. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY 3. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF CAB 4. RECESSED AIR INLET WITH KUSSMAUL AIR EJECT & WEATHERPROOF COVER LOCATED ON DRIVER SIDE OF CAB 5. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT 6. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER 7. TEN RECEPTACLES LOCATED PER ORDER 8. LIFTING EYE-BOPE RESCUE ATTACHMENT AT AERIAL TIP 9. 1500 GPM HIGH FLOW WATERWAY 10. TECNIO 4 SECTION RUNG LIGHTING AT AERIAL DEVICE									CHECKED BY JLO 16SEP24
11. DC POWER TO AERIAL TIP									SHEET SIZE D SHEET NO. 1 OF 1
REV	DATE	BY	CH	ENFORCER	CHASSIS DATA	MAKE	Pierce	TITLE	107' ASCENDANT AERIAL LADDER AND BODY ASSEMBLY
					MODEL			FOR	LIBERTY TOWNSHIP FIRE DEPARTMENT FINDLAY, OH
								DWG NO.	40931 AD