


BODY Pumper, HDRP, Aluminum	TOTAL TANK CAPACITY 770 Gallon Poly Tank
COMPT, LEFT SIDE 189" RollUp Full Height & Depth Front & Rear	WATER CAPACITY 750 Gallons of Water
COMPT, RIGHT SIDE 189" RollUp Full Height & Depth Front & Rear	FOAM CELL CAPACITY 20 Gallon Foam Cell
COMPT, REAR 29.50" FF RollUp Rear Compt w/Tailboard	FOAM SYSTEM Husky 3 Single Agent Foam System

- HOSERED CAPACITIES**
- ① 600' OF 2.50" D.J. POLY HOSE
 - ② 1000' OF 5.00" D.J. POLY HOSE

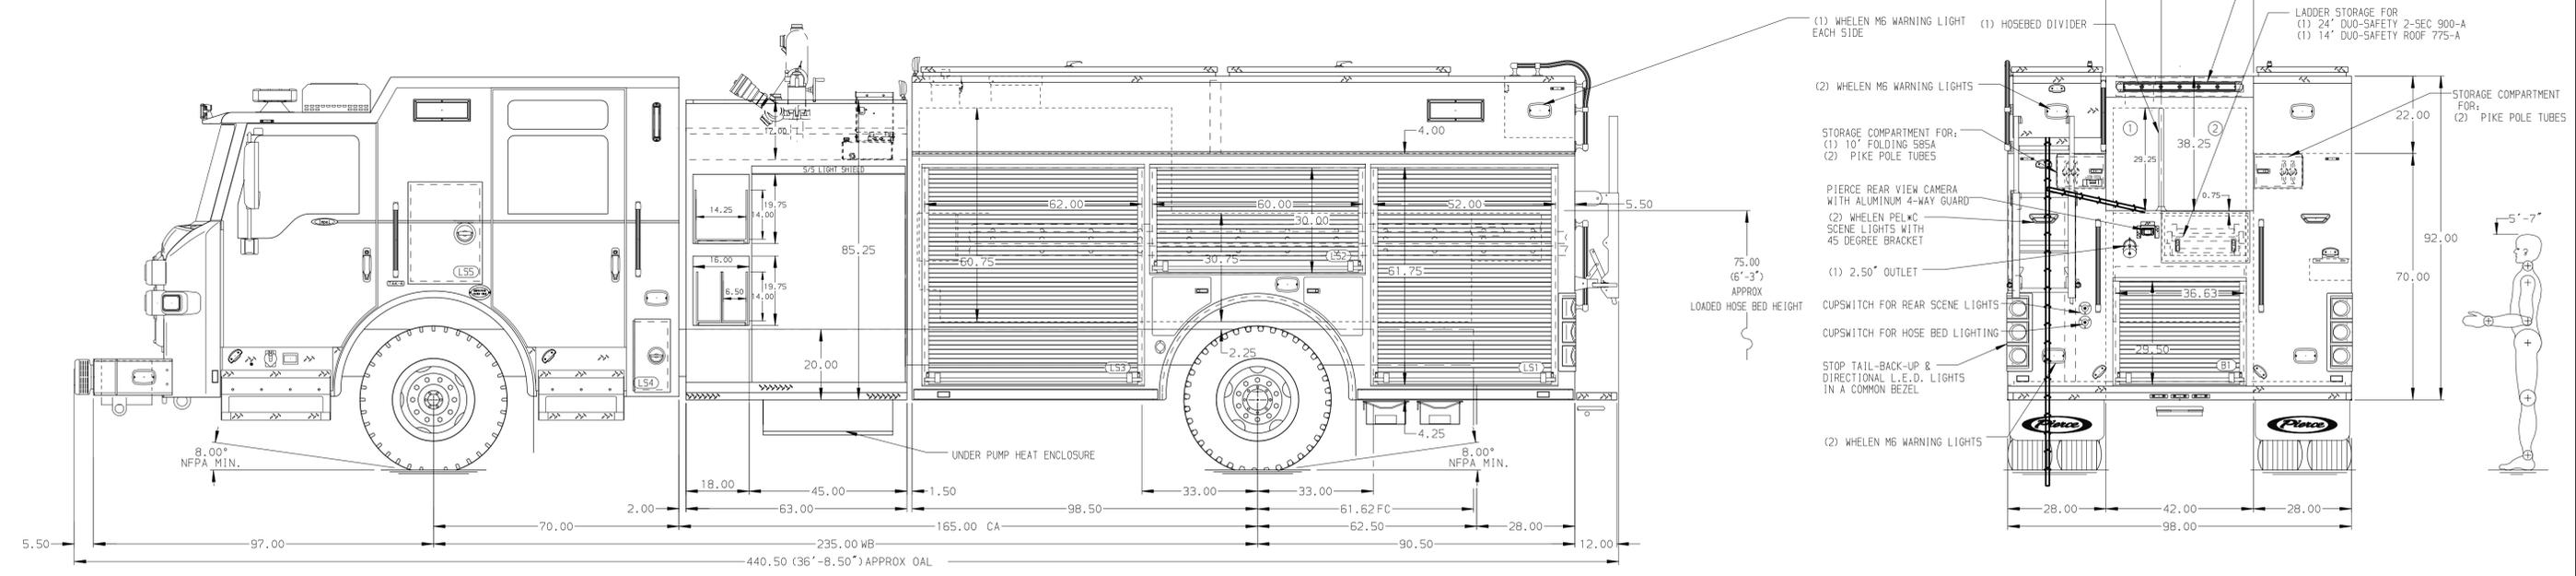

CHASSIS Impel Chassis ENGINE 450 HP Cummins L9 Engine	CAB 7010 Impel Cab BUMPER 19" Extended Painted Steel	AXLE, FRONT, CUSTOM 22,800 Lb TAK-4 Axle AXLE, REAR 27,000 Lb Meritor Axle	TRANSMISSION Allison 6th Gen, 3000 EV5 P	PUMPHOUSE 45" Control Zone Side Mount PUMP 1500 GPM Waterous CSU	SPEEDLAYS, 1.50" (2) 1.50" W/ Poly Trays Std. Cap. SPEEDLAYS, 2.50" (1) 2.50" W/ Poly Tray Std. Cap.	CROSSLAYS Crosslays Not Required GENERATOR Generator Not Required	SAFETY Side Roll and Frontal Impact Protection	Pierce MANUFACTURING INC.	JOB NO. 41050
<p>NOTE</p> <p>DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.</p> <p>1. BATTERY CHARGER LOCATED PER ORDER 2. AIR INLET WITH DISCONNECT FITTING LOCATED ON THE DRIVER'S SIDE STEPWELL. 3. BATTERY CHARGER INDICATOR LOCATED ON THE DRIVER'S SIDE STEPWELL. 4. NEMA STRAIGHTBLADE SHORELINE RECEPTACLE ON THE DRIVER'S SIDE STEPWELL. 5. ONE 2.50" OUTLET W/ 2.50" PLUMBING AND 2.50" X 1.50" REDUCER TRAVEL STOPS ON TOP OF THE RIGHT SIDE OF THE BUMPER</p>								SCALE 1:24	DATE
REV	DATE	BY	CH	CHASSIS DATA	TITLE	FOR	DWG NO.	DRAWN BY LST	19MAY25
05AUG25	LST	SJS	MAKE	Pierce Pumper Approval Drawing	White Bear Lake Fire Department	CHECKED BY MMF	21MAY25	SHEET SIZE D	SHEET NO. 1 OF 1
21JUL25	LST	SJS	MODEL						
09JUL25	LST	SJS	IMPEL						