

PUMPER BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

EnForcer Chassis

ELECTRICAL SYSTEM

MUX

CHASSIS AXLE, FRONT, CUSTOM

22,800 Lb TAK-4 Axle

AXLE, REAR

27,000 Lb Meritor Axle

ENGINE

510 HP Paccar MX13 Engine

TRANSMISSION

Allison 6th Gen, 4000 EVS P

BUMPER

19" Extended Painted Steel

CAB

7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY

1000 Gallon New York Style Poly Tank

WATER CAPACITY

1000 Gallons of Water

FOAM CELL CAPACITY

Foam Cell Not Required

COMPT, PUMPER, REAR

37.75" FF RollUp Rear Comp

COMPT, PUMPER, LEFT SIDE

161" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

161" Lap Low FDLER

FIRE SUPPRESSION PUMPHOUSE

52" Control Zone Side Mount

PUMP

2000 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

SpeedLays Not Required

GENERATOR

Generator Not Required

FOAM SYSTEM

Foam System Not Required





SAFETY

Side Roll and Frontal Impact Protection

NOTE


DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP OF BUMPER
- SHOULDER RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE CAB CORNER
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED PER ORDER
- FOUR ADJUSTABLE SHELVES LOCATED PER ORDER
- TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
- ONE SLIDE-OUT TRAY LOCATED PER ORDER
- ONE SWING-OUT TOOLBOARD LOCATED PER ORDER

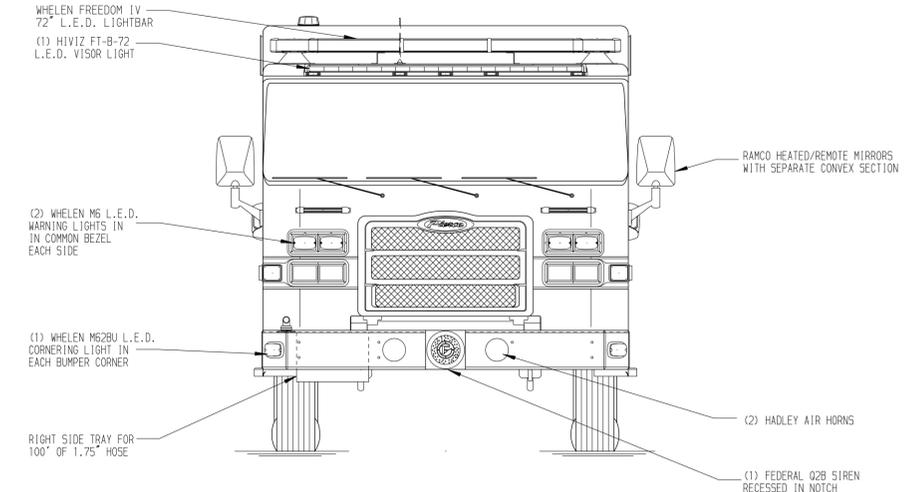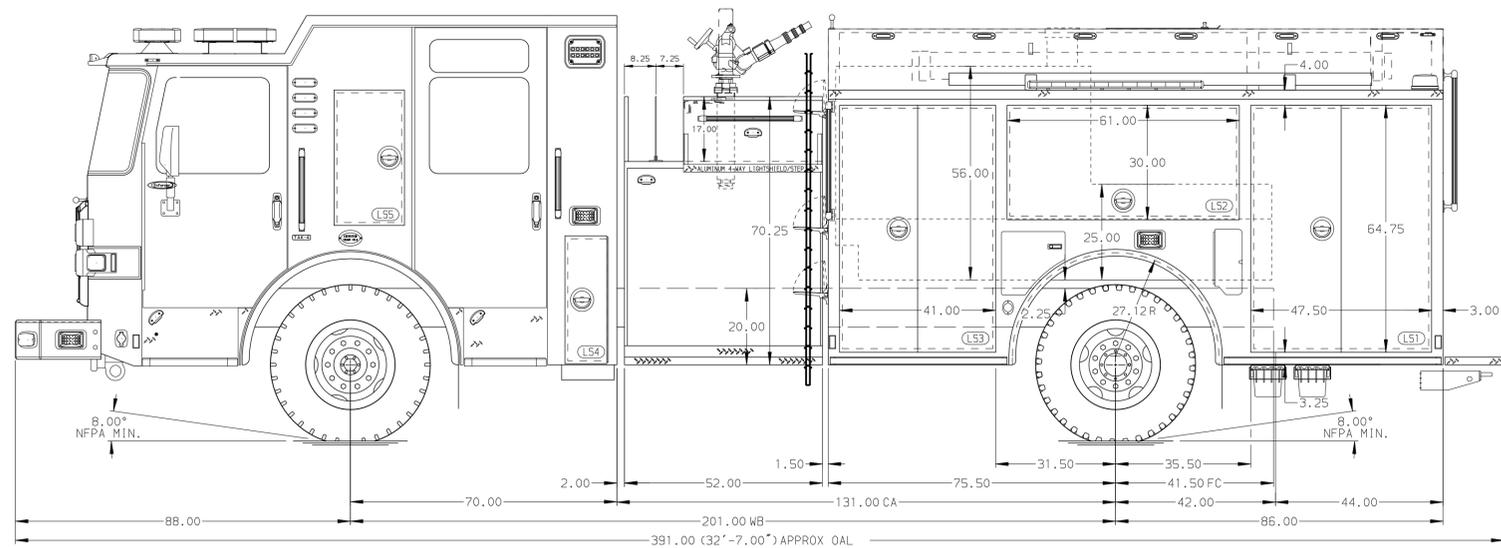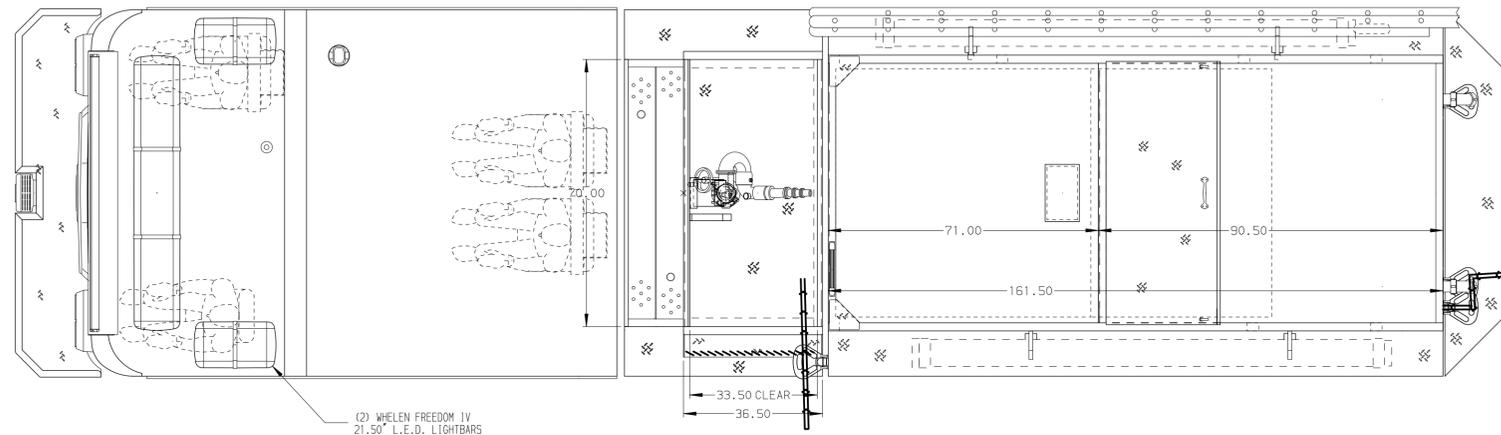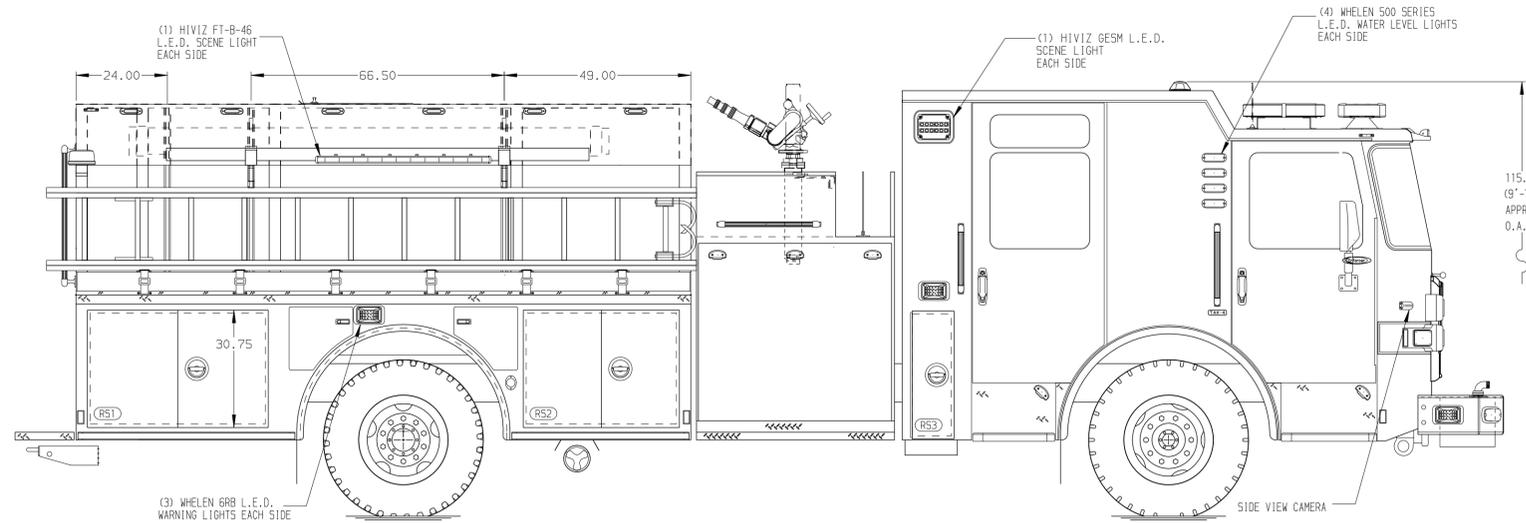

HOSEBED CAPACITIES

- 200' OF 2.50" KEY COMBAT READY HOSE
- 500' OF 3.00" KEY BIG TO HOSE
- 1000' OF 5.00" KEY HYFLOW HOSE
- 300' OF 1.75" KEY COMBAT SNIPER HOSE

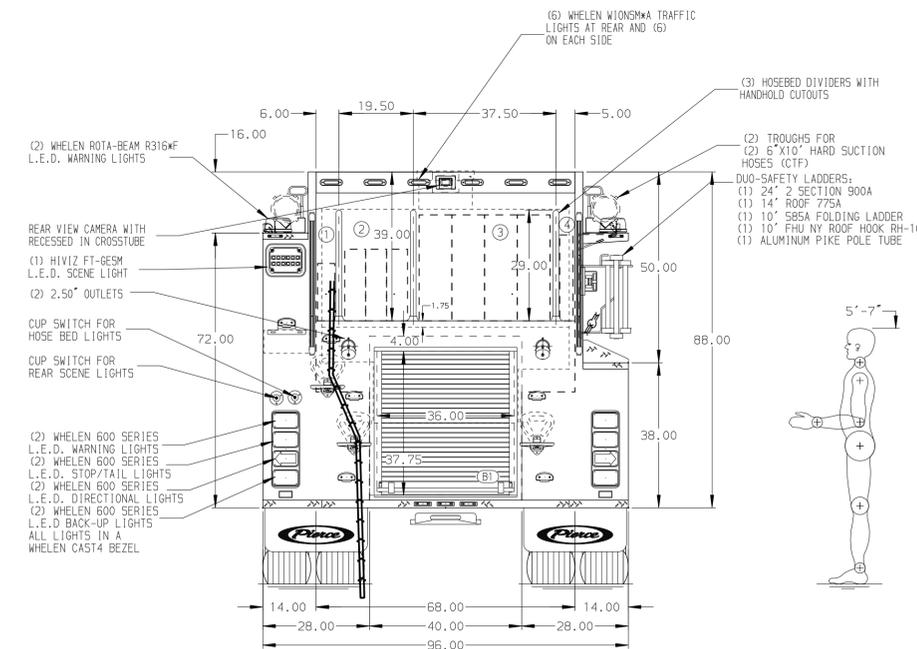

		JOB NO.	41271-01-03
		SCALE	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	JAM 01MAY25
FOR	Scott County	CHECKED BY	NPE 2MAY25
DWG NO.	41271AD	SHEET SIZE	SHEET NO.
REV	18JUL25	BY	JAM
CH	JGO	DATE	1 OF 1