
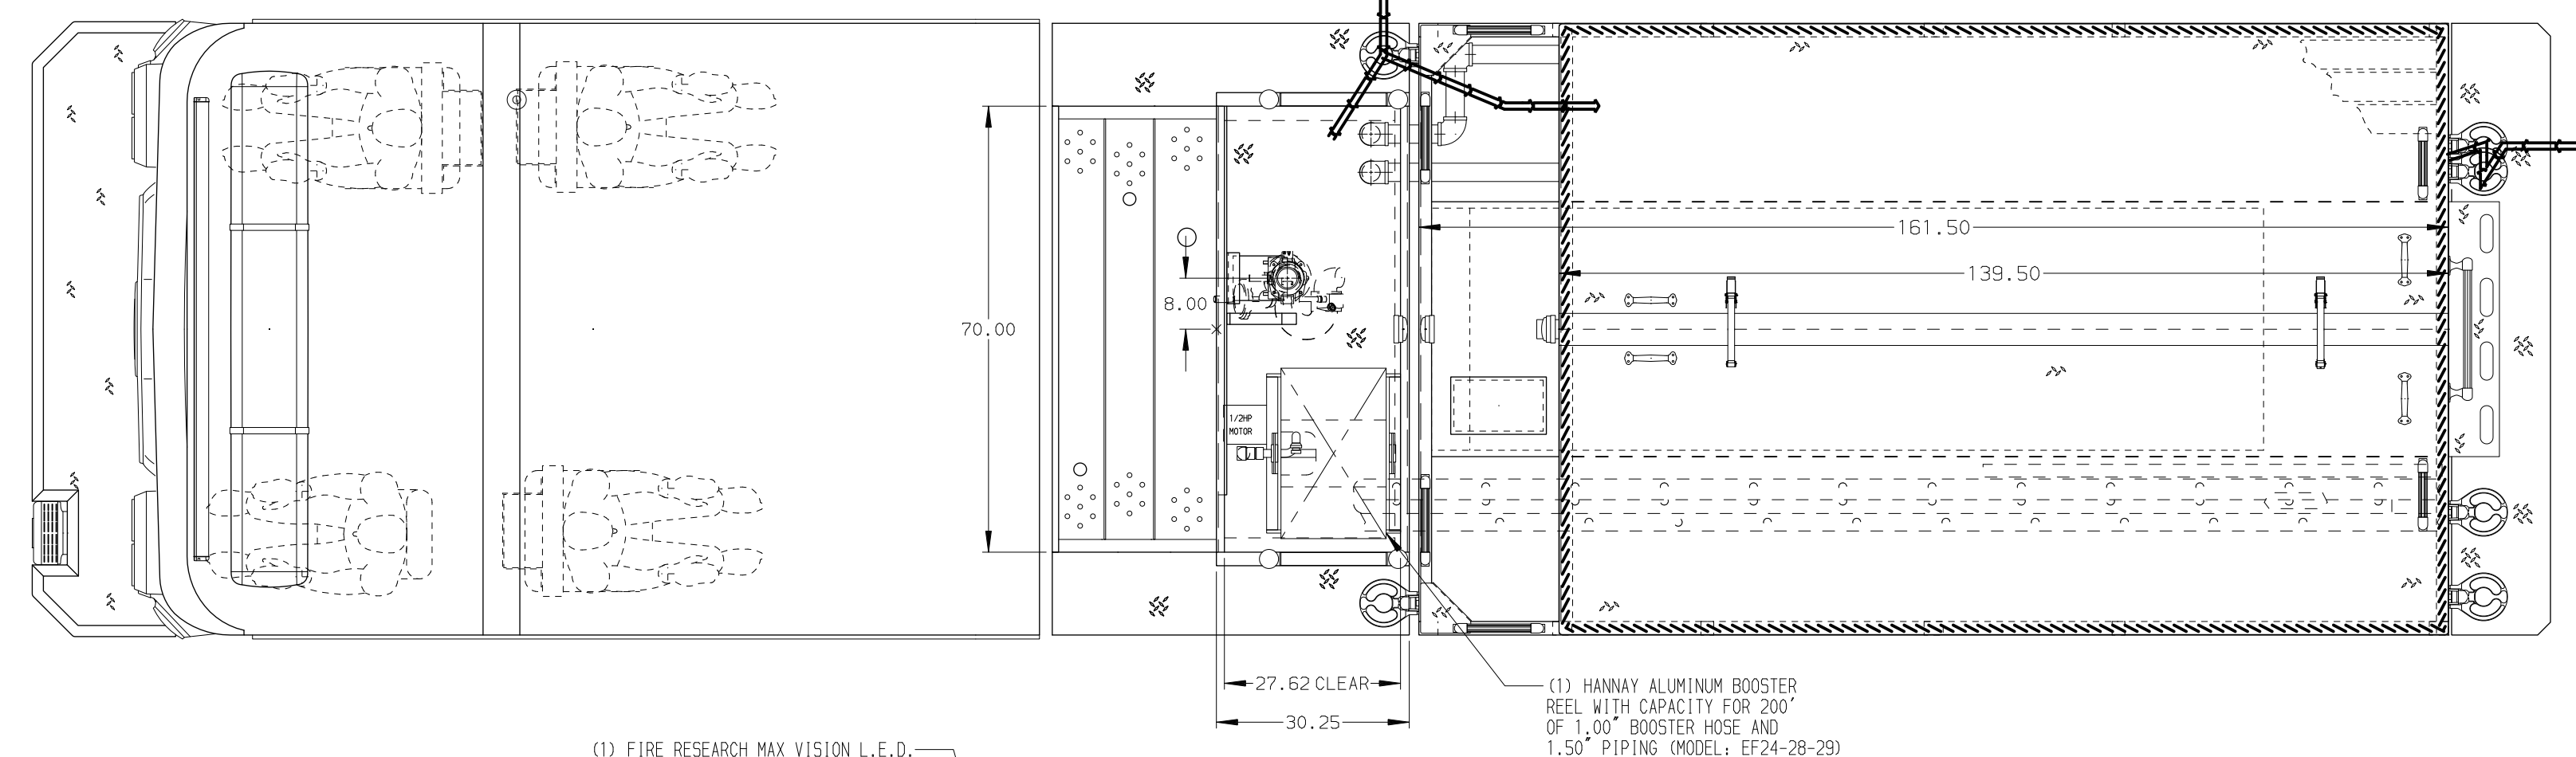
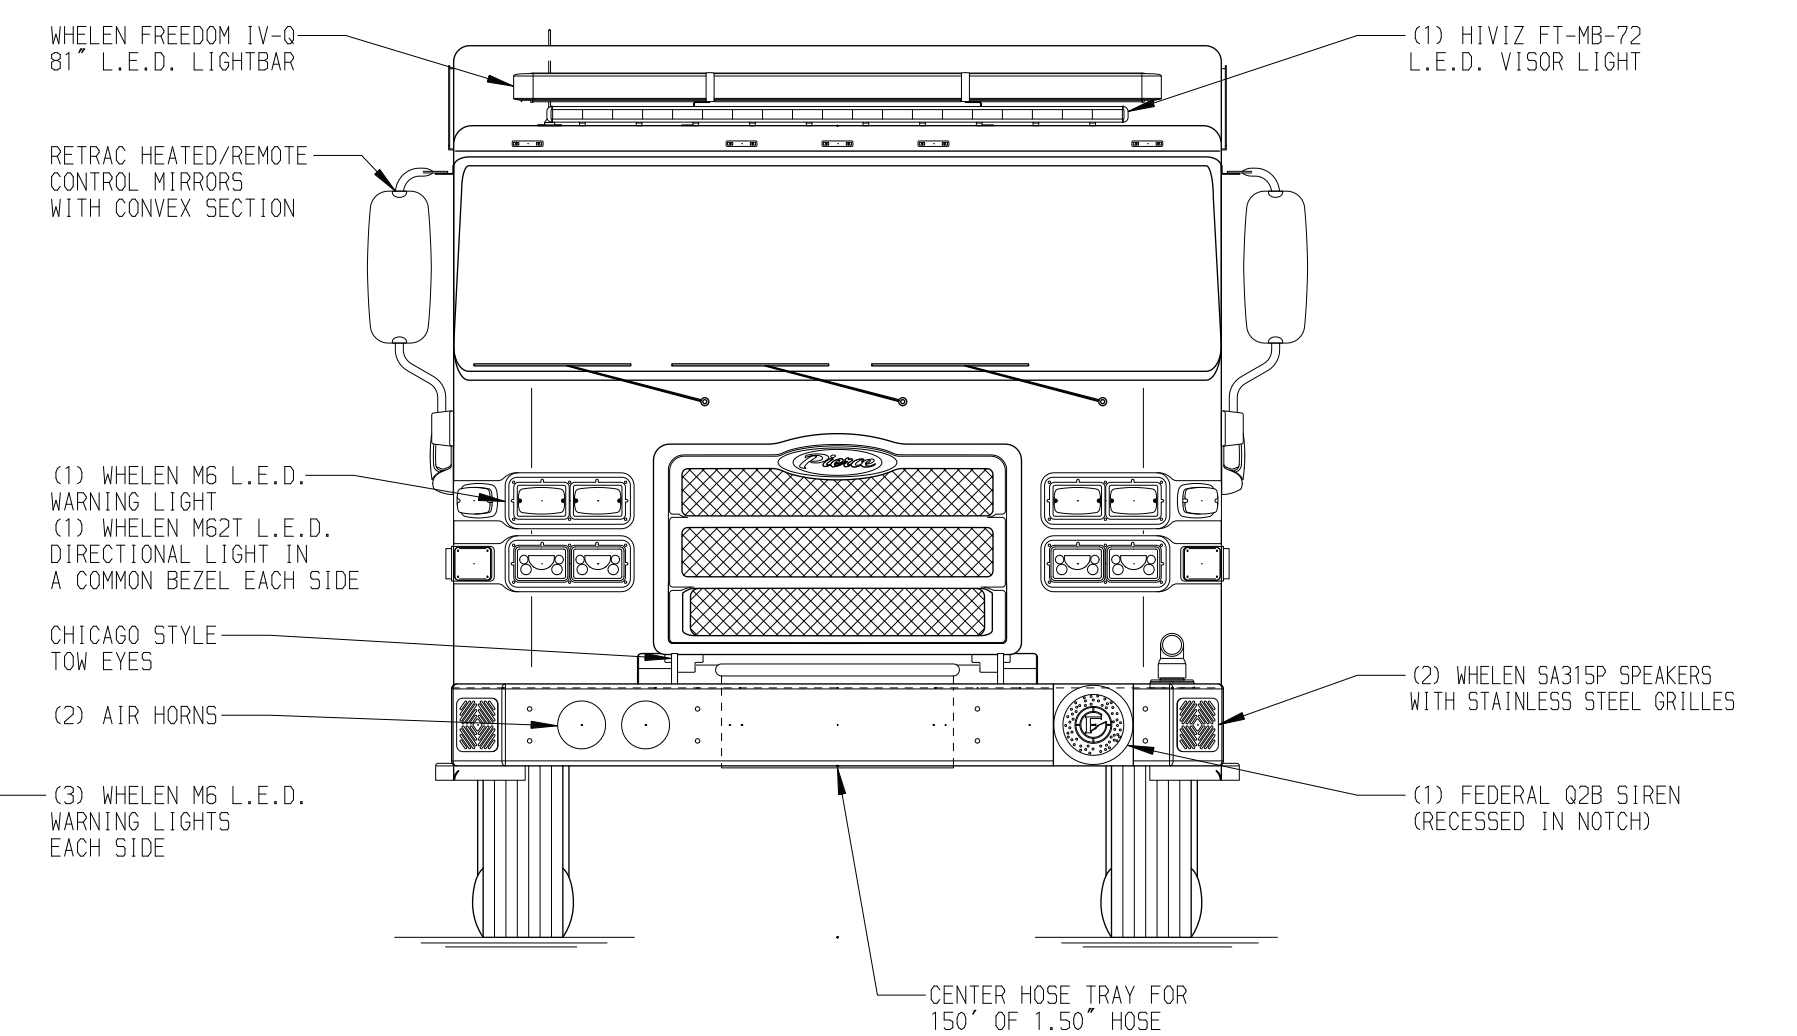


**PUMPER BODY**  
 Long Aluminum 2nd Gen Pumper  
**CHASSIS**  
 EnForcer Chassis  
**ELECTRICAL SYSTEM**  
 Hard Wired



**CHASSIS AXLE, FRONT, CUSTOM**  
 18,000 Lb Dana Axle  
**AXLE, REAR**  
 24,000 Lb Dana Axle  
**ENGINE**  
 450 HP Cummins L9 Engine  
**TRANSMISSION**  
 Allison 6th Gen, 3000 EVS P  
**BUMPER**  
 19" Extended Painted Steel  
**CAB**  
 7010 Enforcer Cab

**BODY TOTAL TANK CAPACITY**  
 750 Gallon Poly Tank  
**WATER CAPACITY**  
 750 Gallons of Water  
**FOAM CELL CAPACITY**  
 Foam Cell Not Required  
**COMPT, PUMPER, REAR**  
 44.50" FF RollUp Rear Compt  
**COMPT, PUMPER, LEFT SIDE**  
 161" RollUp Full Height Front & Rear FDLR  
**COMPT, PUMPER, RIGHT SIDE**  
 161" RollUp Full Height & Depth

**FIRE SUPPRESSION PUMPHOUSE**  
 56" Control Zone Side Mount  
**PUMP**  
 2000 GPM Waterous CSU  
**CROSSLAYS, 1.50"**  
 (2) 1.50" Standard Capacity  
**CROSSLAYS, 2.50"**  
 (1) 2.50" Standard Capacity  
**SPEEDLAYS**  
 SpeedLays Not Required  
**GENERATOR**  
 Generator Not Required  
**FOAM SYSTEM**  
 Foam System Not Required

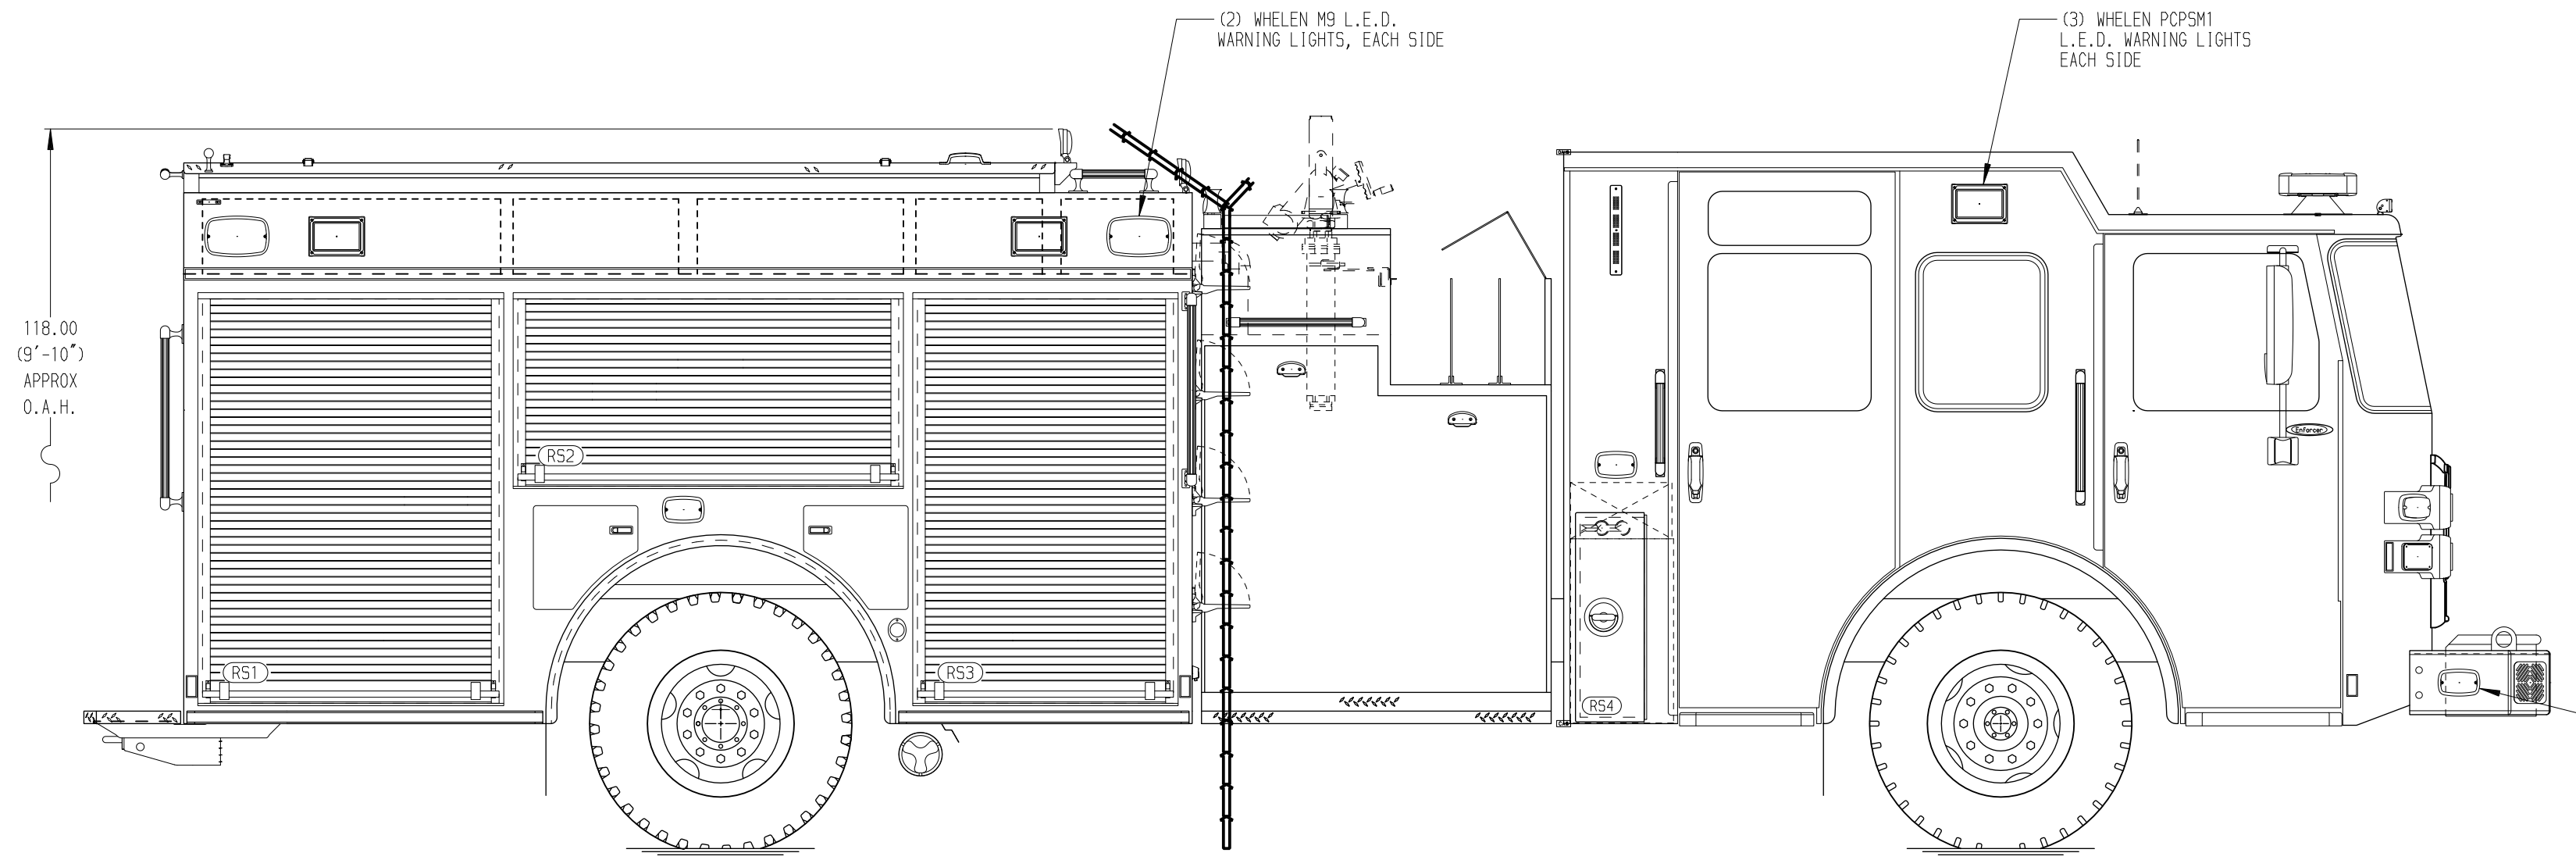

- HOSEBED CAPACITIES**
- ① 400' OF 2.50" D.J. POLY HOSE
  - ② 1000' OF 5.00" D.J. POLY HOSE
  - ③ 200' OF 2.50" D.J. POLY HOSE
  - ④ 200' OF 2.50" D.J. POLY HOSE (BELOW) WITH 200' OF 1.75" D.J. POLY HOSE (ABOVE)

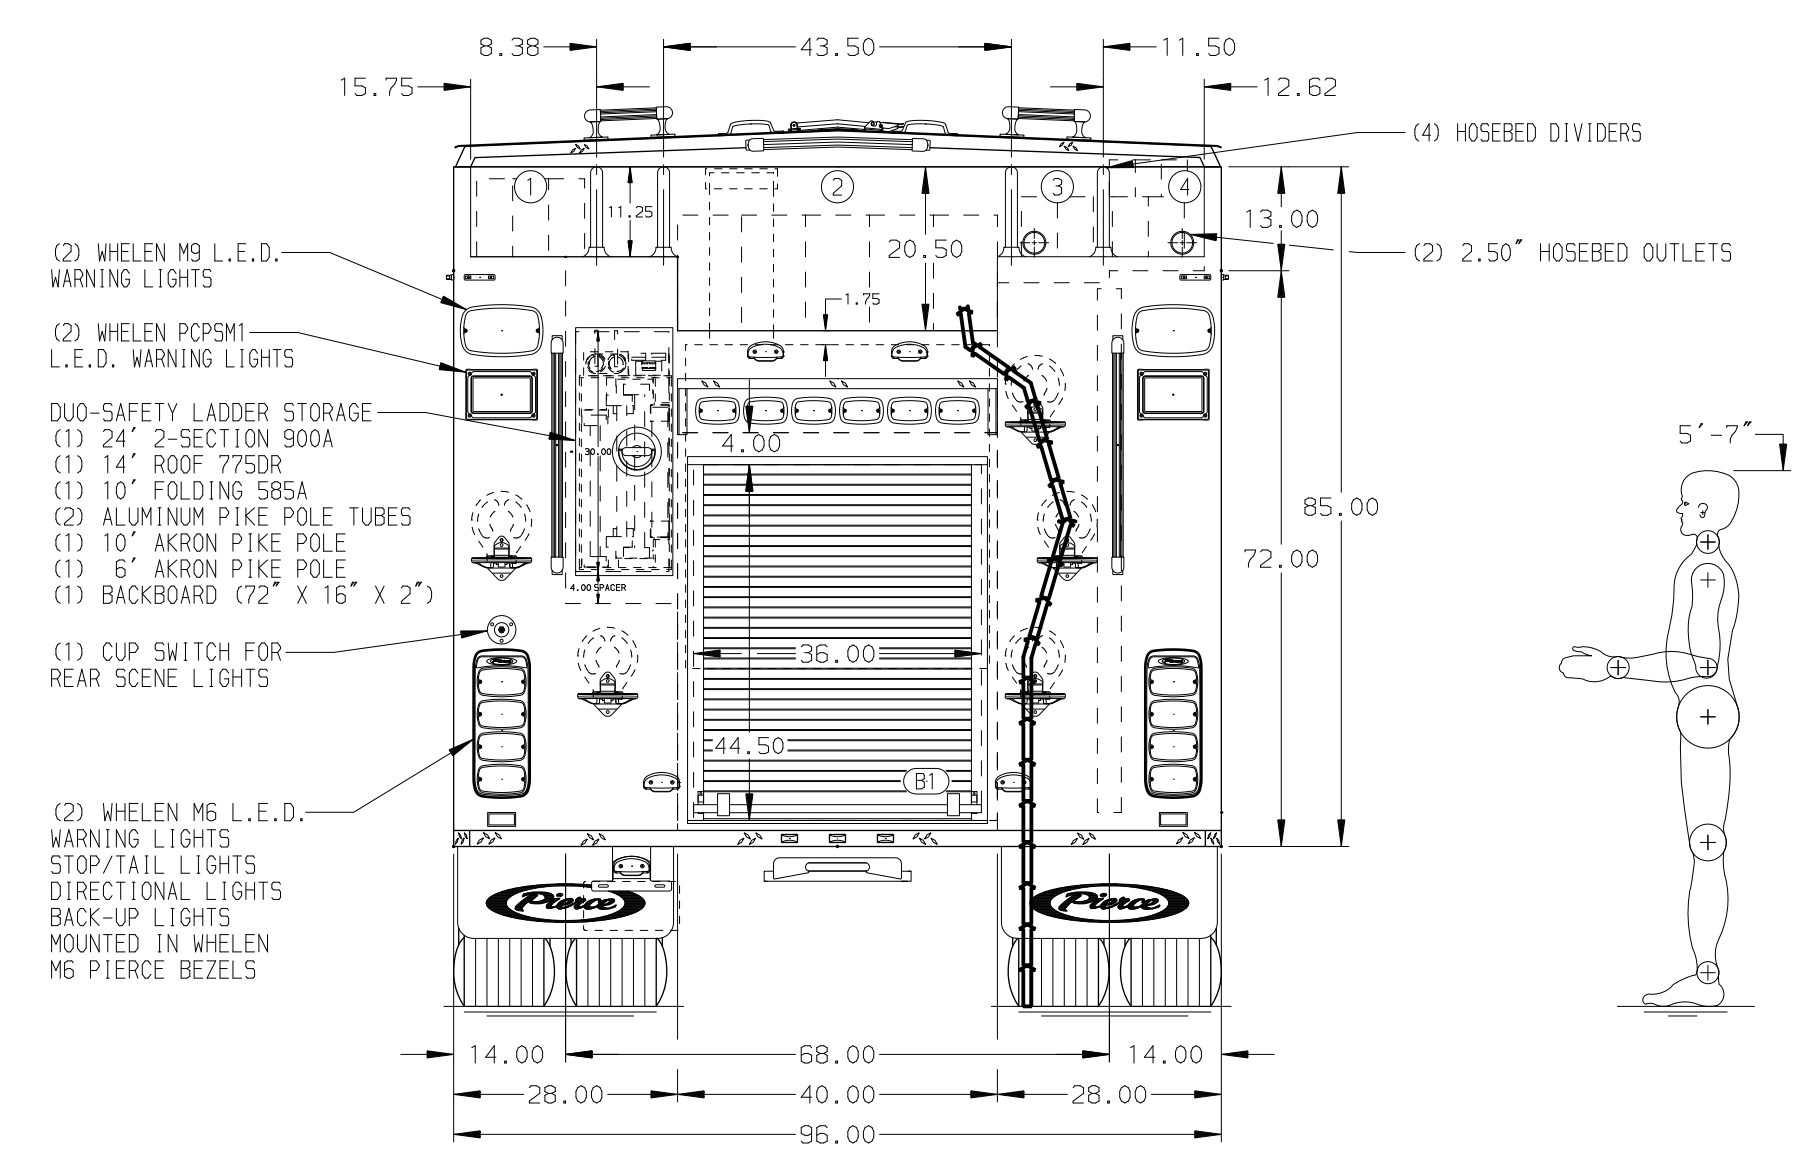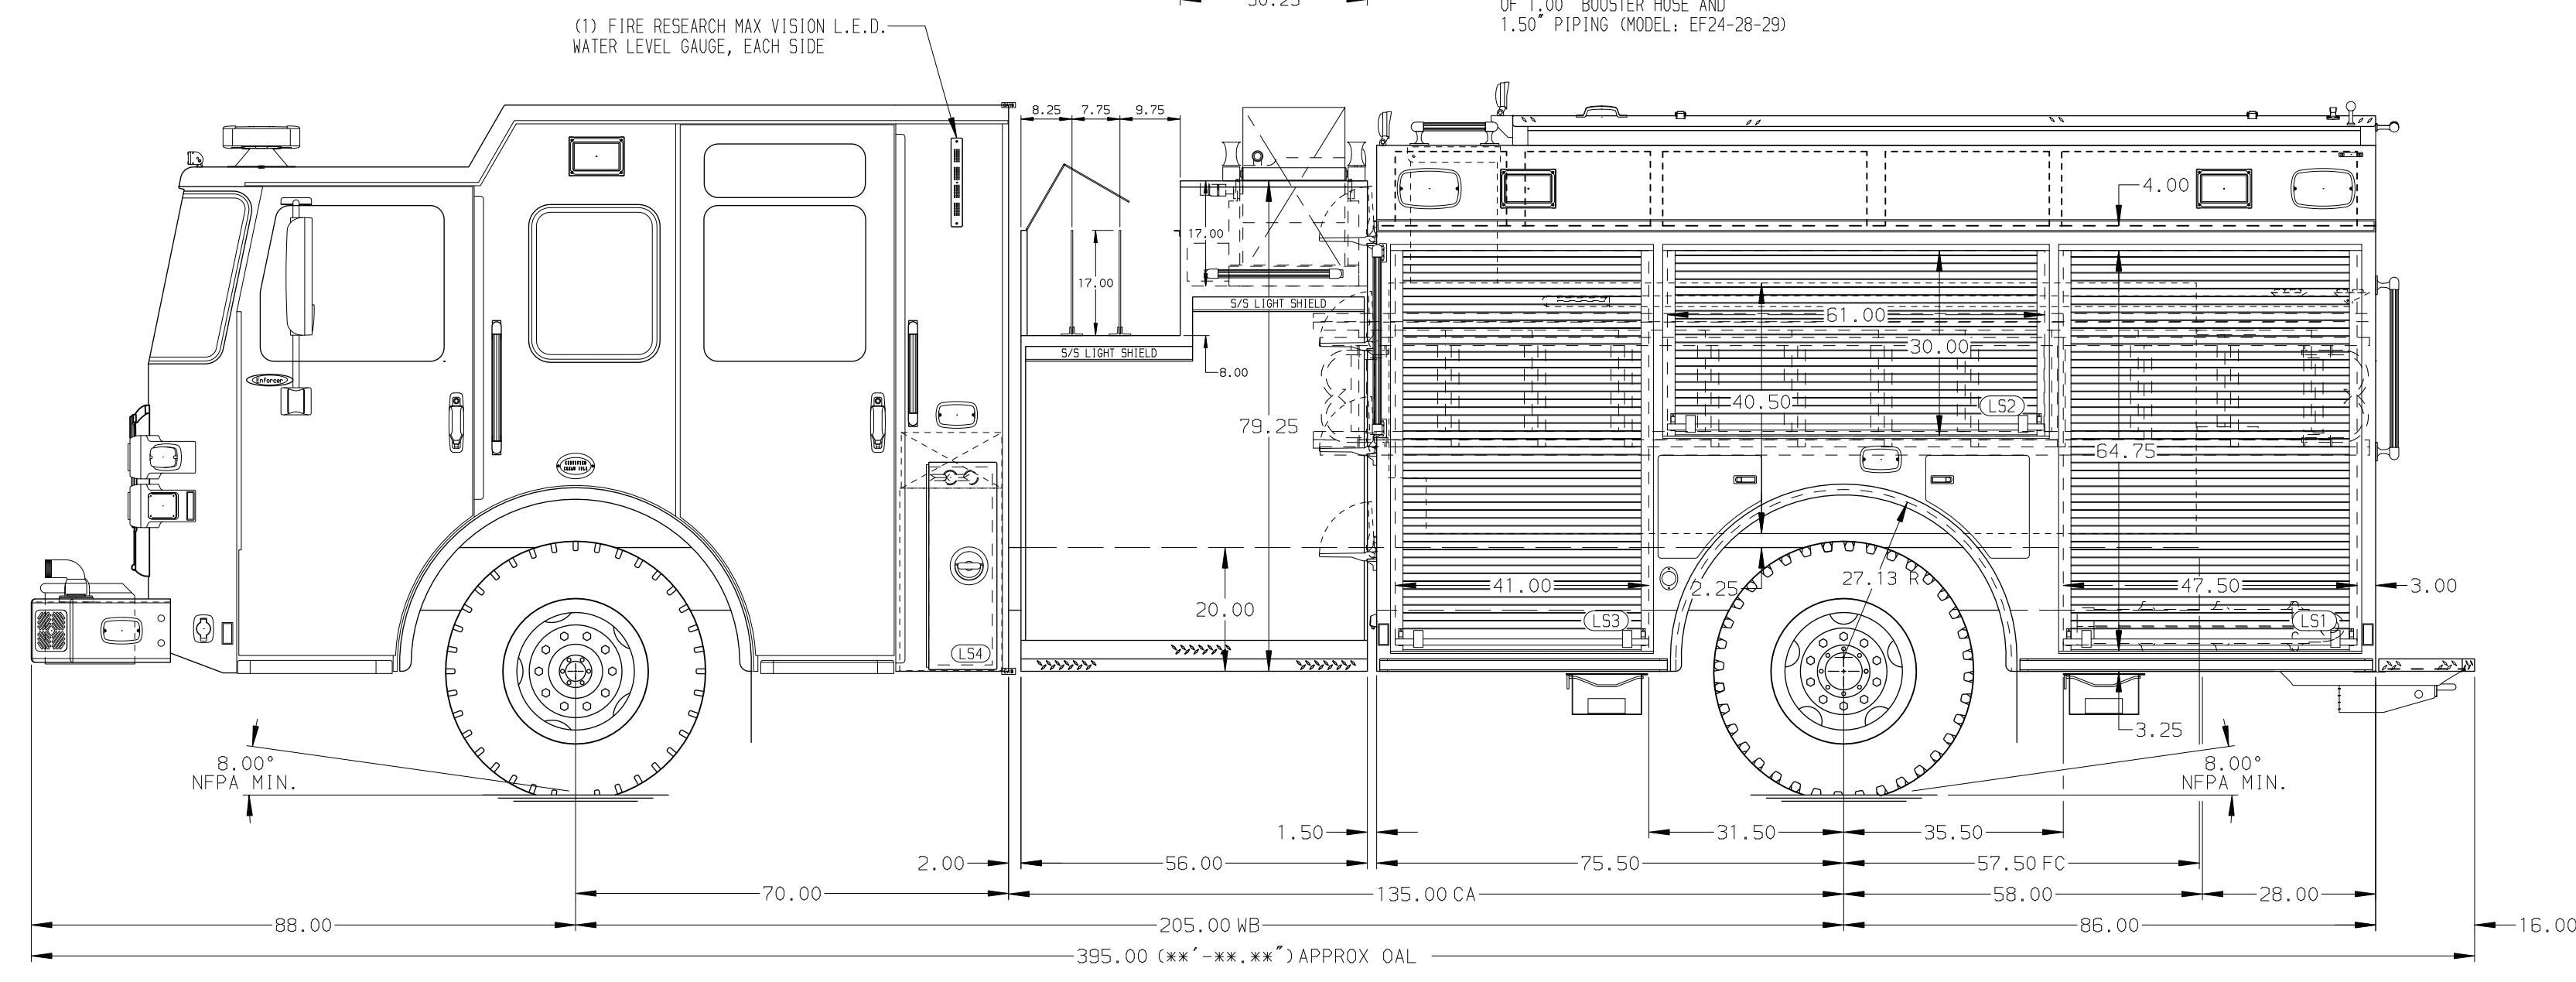

**NOTE**  
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. ONE 2.50 OUTLET WITH 2.50 PIPING AND SWIVEL LOCATED ON TOP LEFT OF BUMPER
- 2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE CORNER OF THE CAB
- 3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE PUMP PANEL
- 4. BATTERY CHARGER LOCATED PER ORDER
- 5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
- 6. NINE FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER ORDER
- 7. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY WITH CABLE RELEASE LOCATED PER ORDER
- 8. THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
- 9. PARTITION BETWEEN COMPARTMENTS L51/B1 AND RS1/B1

- 10. PAC TRAC ON THE WALL OF COMPARTMENTS LS2 & LS3
- 11. RETENTION NETTING LOCATED PER ORDER
- 12. ONE ADJUSTABLE 0.30" PLATE LOCATED PER ORDER
- 13. TWO 15/20A 120V RECEPTACLES LOCATED PER ORDER
- 14. ONE LITTLE GIANT VELOCITY LADDER (MODEL 13 15413-001) LOCATED IN L51
- 15. TWO NY PIKE POLE TUBES LOCATED IN TRANSVERSE COMPARTMENT

080CT25	JDA	GKH	PIERCE
05SEP25	JDA	GKH	MODEL
REV	DATE	BY	CH

	JOB NO.	41280-01-02			
	SCALE	DATE			
TITLE	Pierce Pumper Approval Drawing	DRAWN BY	JDA	25JUL25	
FOR	Conway Fire Department	CHECKED BY	MMF	25JUL25	
DWG NO.	41280AD	SHEET SIZE	D	SHEET NO.	1 OF 1