PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
Hard Wired

CHASSIS

AXLE,FRONT,CUSTOM
19,500 Lb TAK-4 Axle

AXLE,REAR
24,000 Lb Meritor Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
ALlison 6th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7000 Enforcer Cab

BODY

TOTAL TANK CAPACITY
770 Gallon New York Style Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL CAPACITY
20 Gallon Foam Cell

COMPT,PUMPER,REAR
30.75" FF Rollup Rear Compt

COMPT,PUMPER,LEFT SIDE
152" Rollup Full Height Front & Rear FDLER

COMPT,PUMPER,RIGHT SIDE
152" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
48" Control Zone Side Mount

PUMP
2000 GPM Waterous CSU

CROSSLAYS,1.50"
(2) 1.50" Standard Capacity

CROSSLAYS,2.50"
2.50" Crosslay Not Required

SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required

FOAM SYSTEM
Husky 3 Single Agent Foam System

SAFETY
Side Roll and Frontal Impact Protection

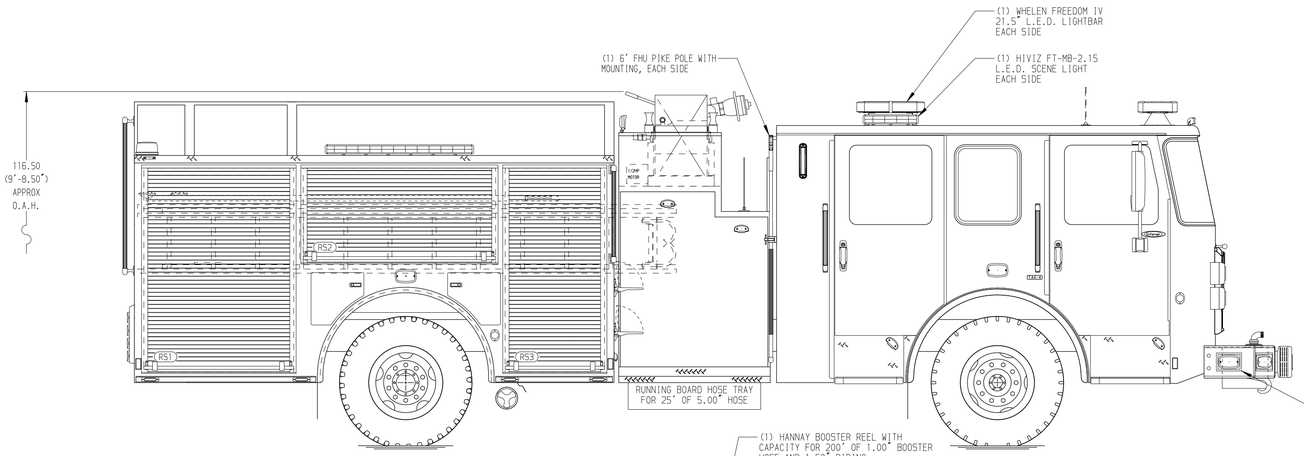

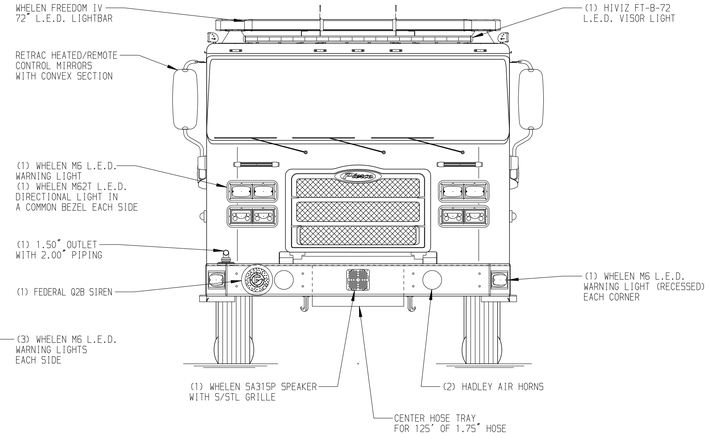

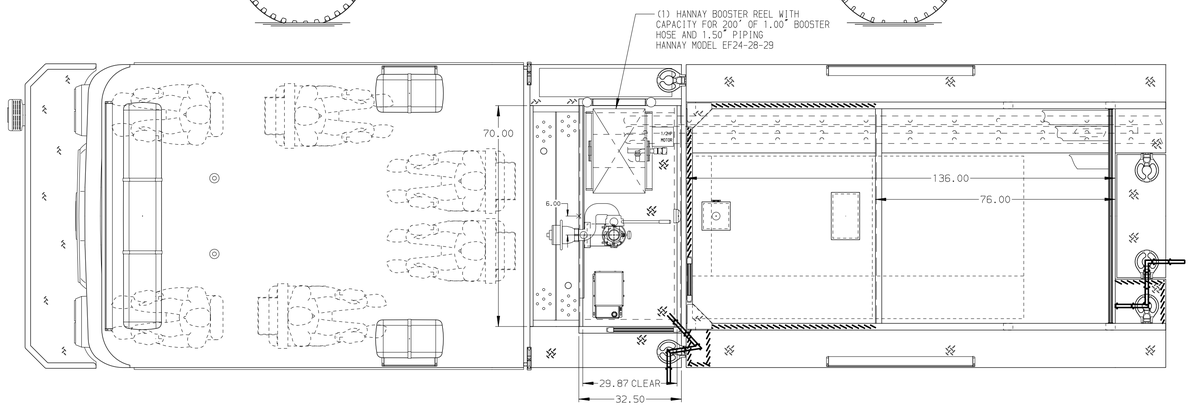

HOSEBED CAPACITIES
1. 200' OF 2.50" D.J. POLY HOSE
2. 500' OF 3.00" D.J. POLY HOSE
3. 1000' OF 5.00" D.J. POLY HOSE

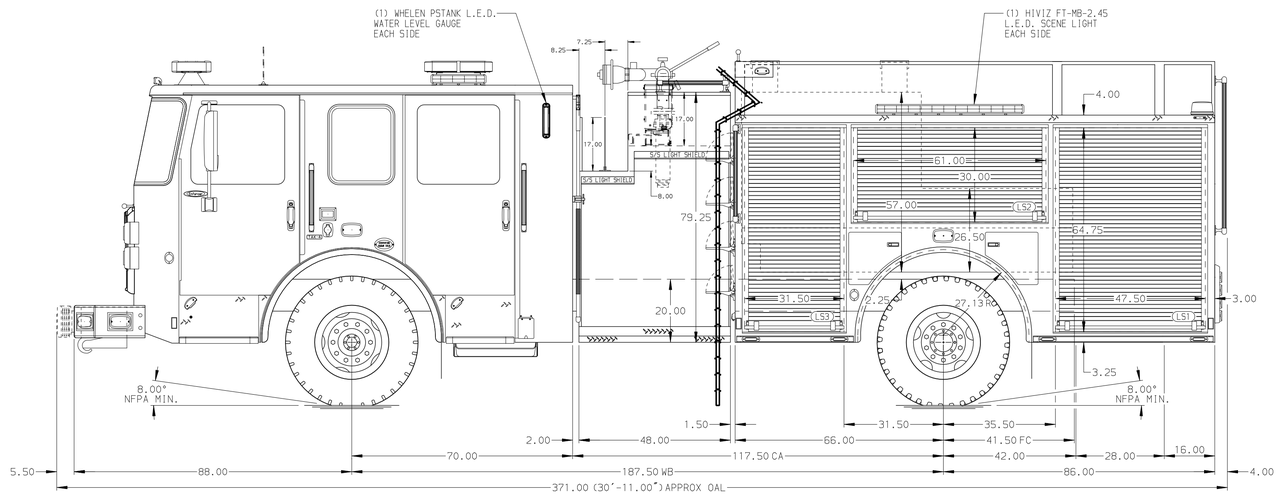

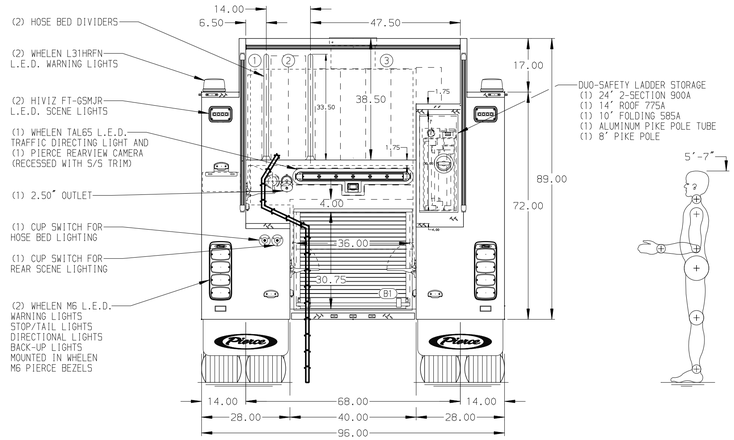

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. DUAL L.E.D. LIGHTSTRIPS LOCATED IN HOSEBED
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF THE CAB
6. WORDEN HWG-5B WHEEL CHOCKS TO BE SHIPPED LOOSE

REV	DATE	BY	CH
V	17OCT25	JDA	KBO
V	18SEP25	JDA	KBO
V	16SEP25	JDA	KBO

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing
FOR: Little Rock
DWG NO.: 41526AD-SH1

JOB NO.: 41526 01-03
SCALE: 1:24
DRAWN BY: JDA
DATE: 13AUG25
CHECKED BY: KBO
DATE: 14AUG25
SHEET SIZE: D
SHEET NO.: 1 OF 2

View File Created 20-OCT-2025 07:30:24