

PUMPER

BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

ELECTRICAL SYSTEM

Hard Wired

CHASSIS

AXLE, FRONT, CUSTOM

19,500 lb TAK-4 Axle

AXLE, REAR

24,000 lb Meritor Axle

ENGINE

455 HP Cummins X12 Engine

TRANSMISSION

Allison 6th Gen, 4000 EVS P

BUMPER

19" Extended Pointed Steel

CAB

7000 Enforcer Cab

BODY

TOTAL TANK CAPACITY

770 Gallon New York Style Poly Tank

WATER CAPACITY

750 Gallons of Water

FOAM CELL CAPACITY

20 Gallon Foam Cell

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

152" RollUp Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

152" RollUp Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE

48" Control Zone Side Mount

PUMP

2000 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

Speedlays Not Required

GENERATOR

Generator Not Required

FOAM SYSTEM



Husky 3 Single Agent Foam System

SAFETY


Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. DUAL L.E.D. LIGHTSTRIPS LOCATED IN HOSEBED
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPNELL
4. BATTERY CHARGER LOCATED PER ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF THE CAB
6. WORDEN HWG-SB WHEEL CHOCKS TO BE SHIPPED LOOSE

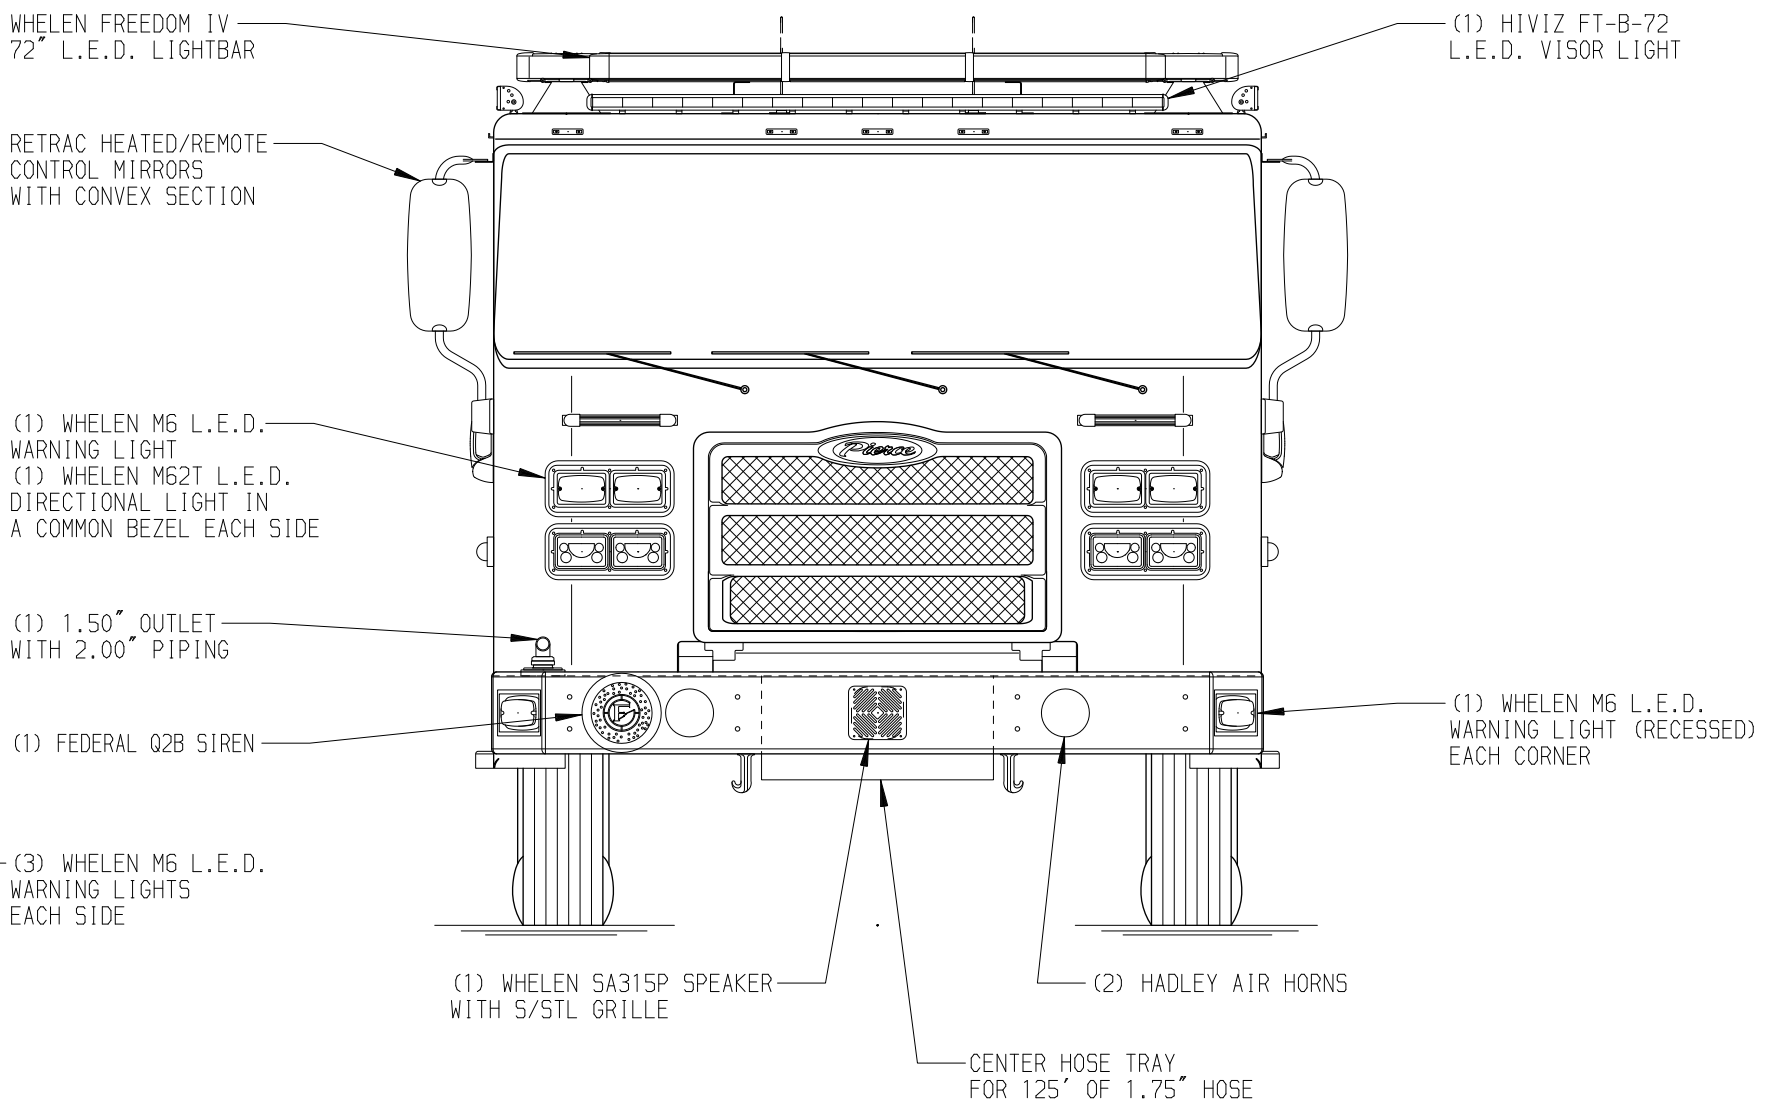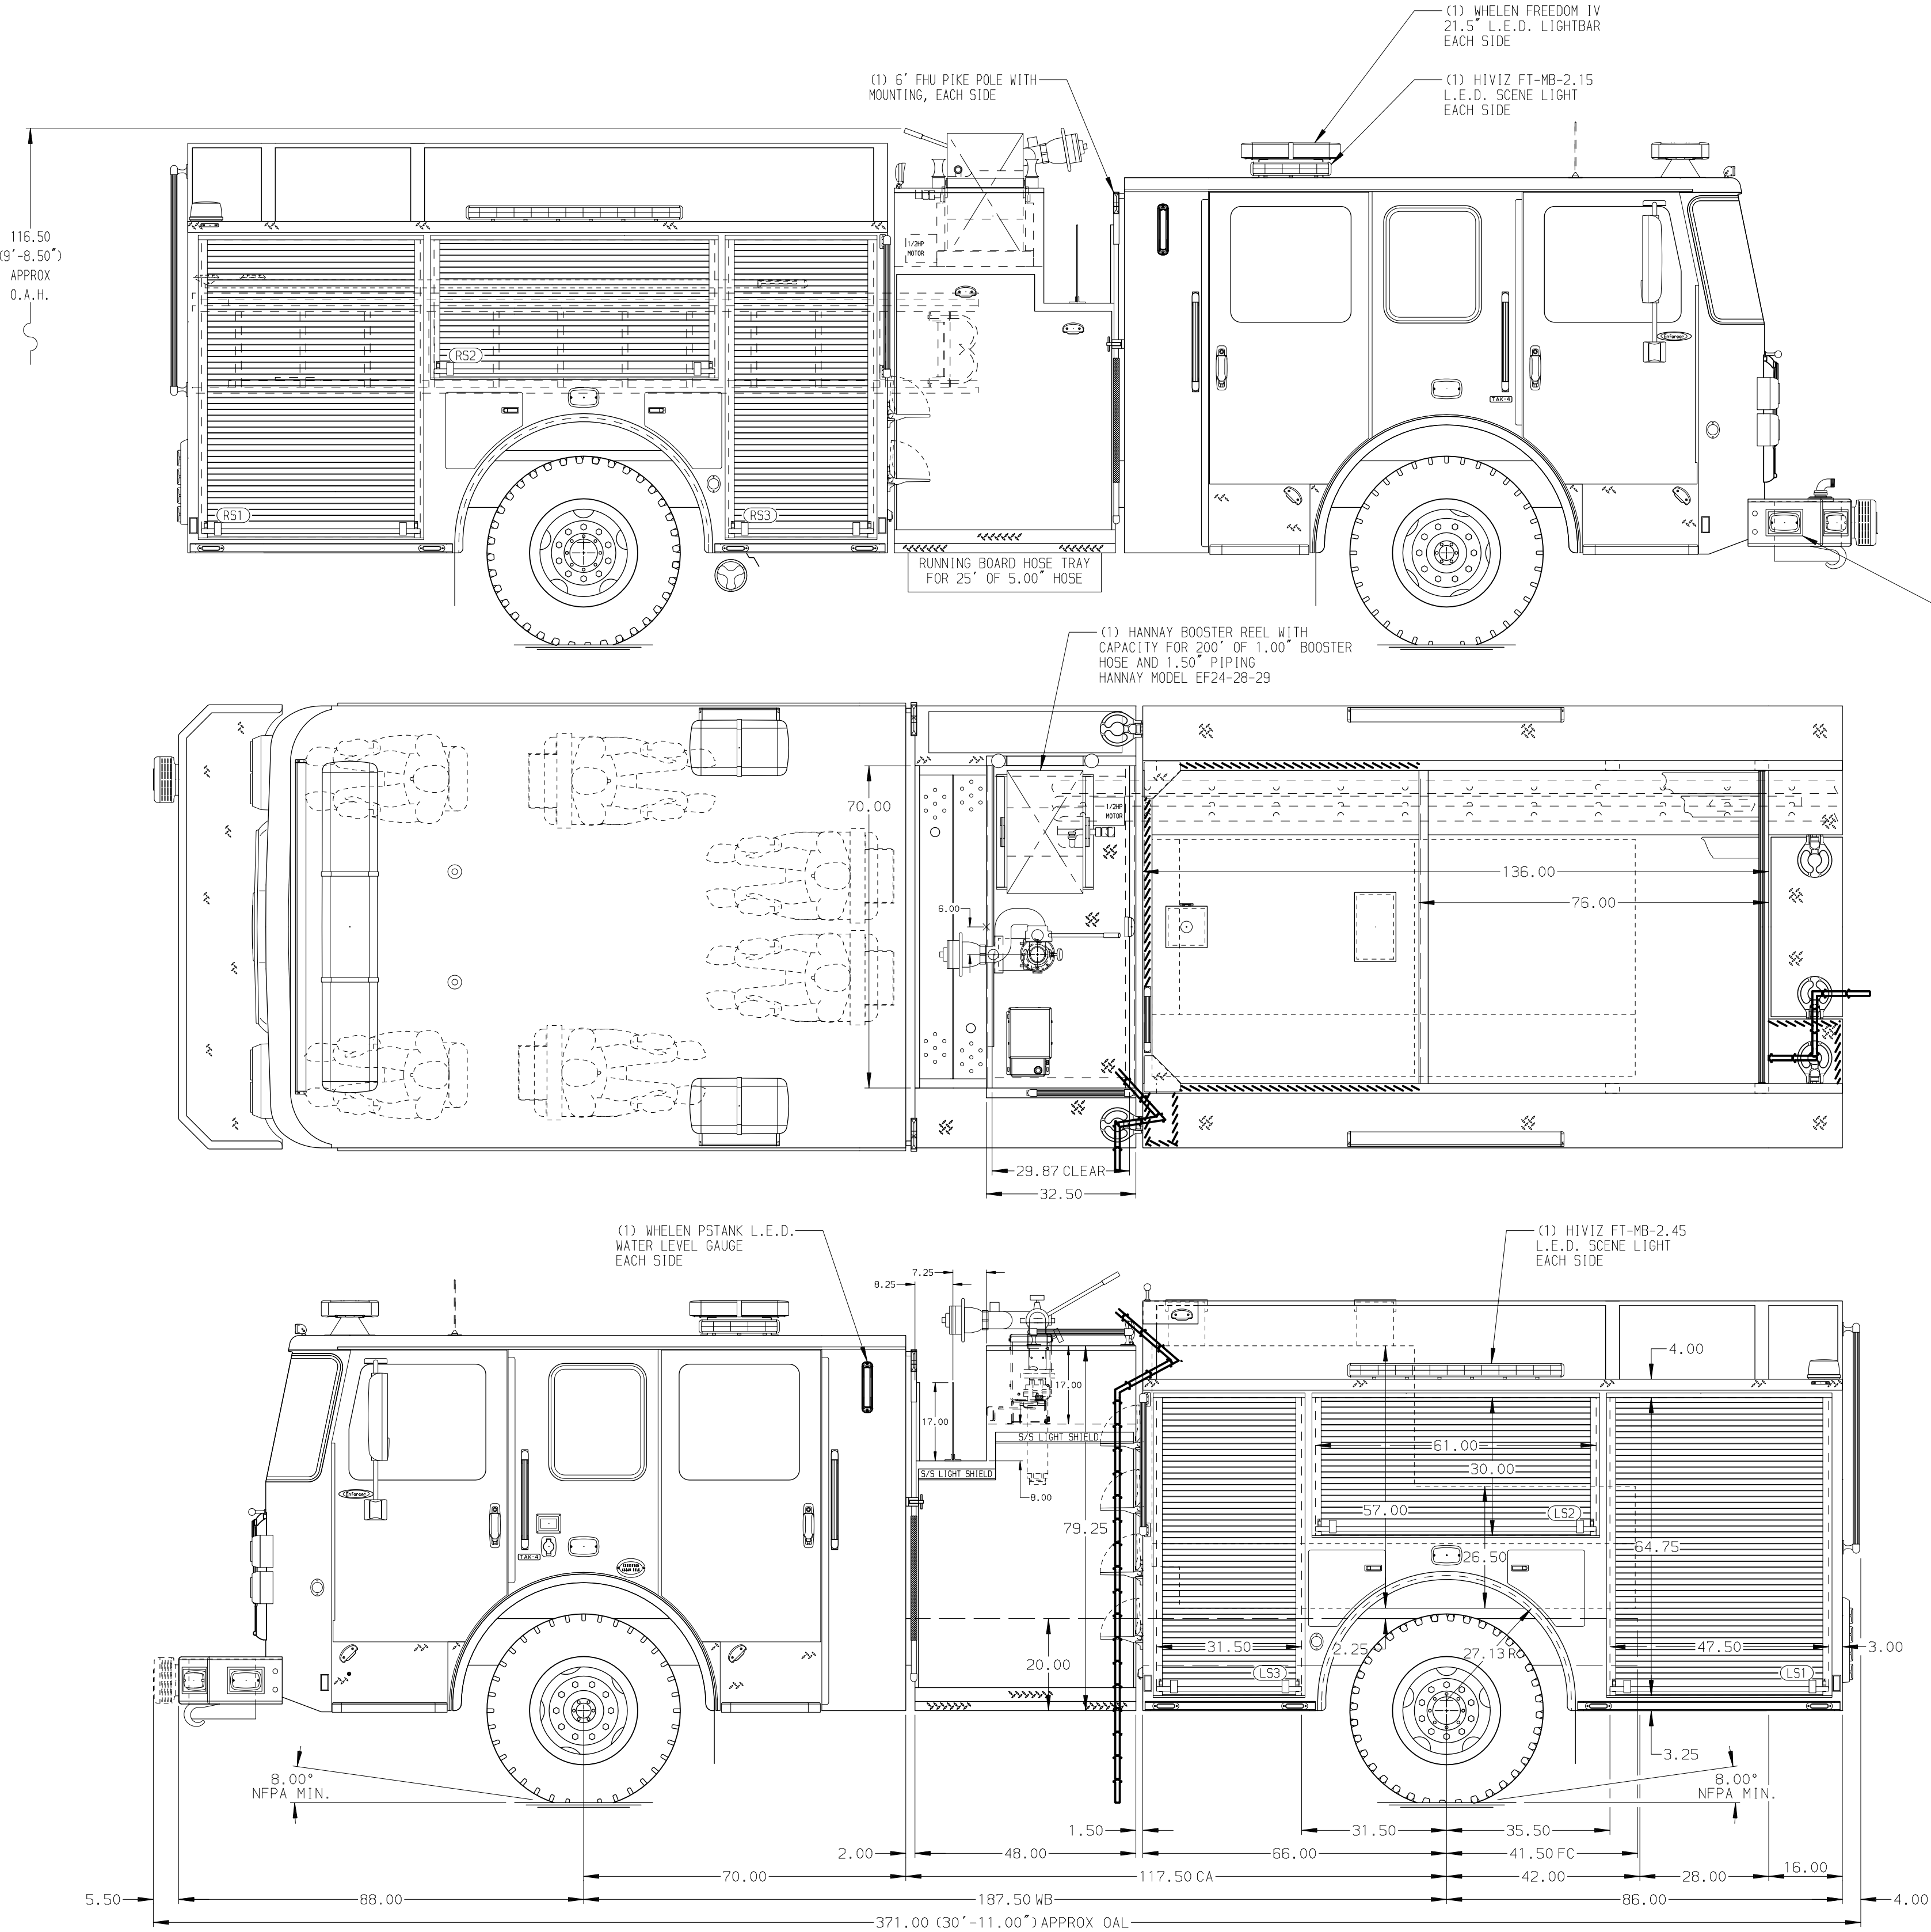

- HOSEBED CAPACITIES
- ① 200' OF 2.50" D.J. POLY HOSE
 - ② 500' OF 3.00" D.J. POLY HOSE
 - ③ 1000' OF 5.00" D.J. POLY HOSE

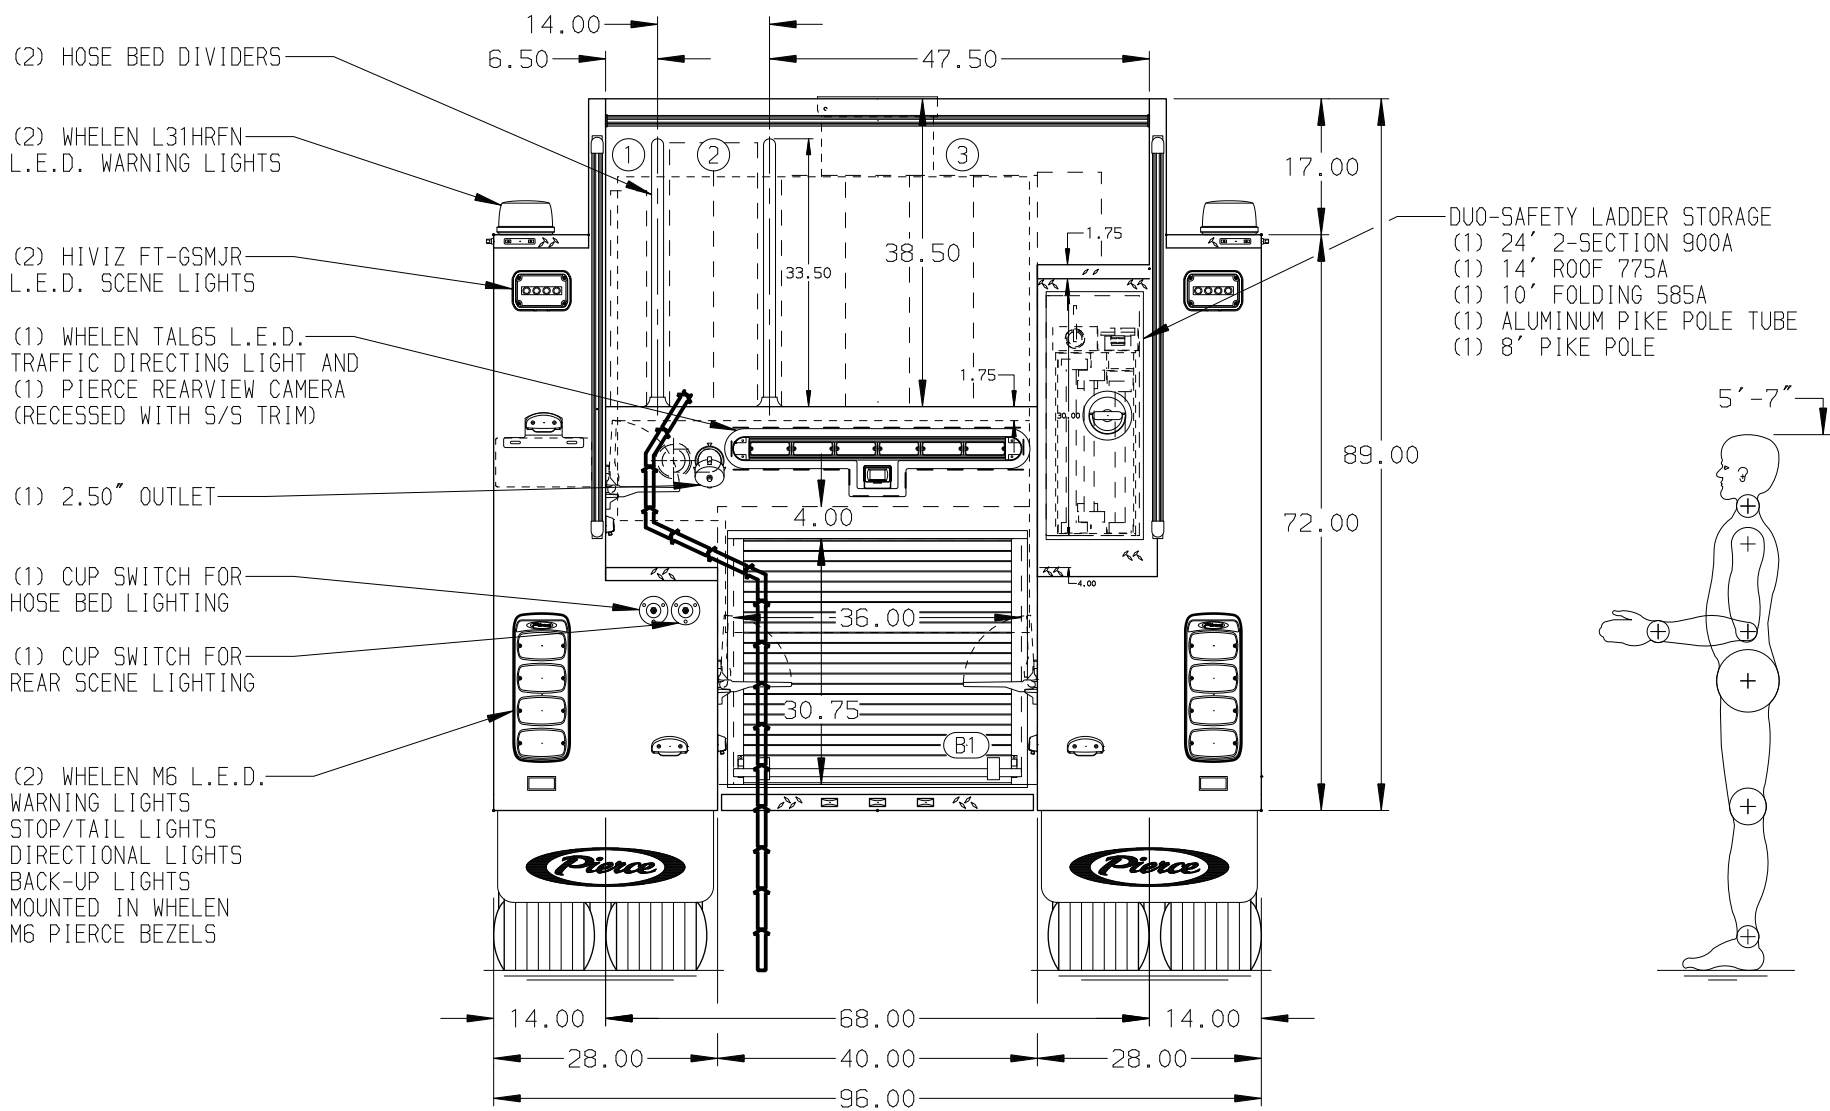

	MANUFACTURING INC.		JOB NO.	41527
			SCALE	01-04
			1:24	DATE
			DRAWN BY	270CT25
TITLE	Pierce Pumper Approval Drawing		DRAWN BY	270CT25
	-		FOR	270CT25
	Little Rock		CHECKED BY	
	-		KB0	
DWG NO.	41527AD-SH1		SHEET SIZE	SHEET NO.
			D	1 OF 2