

PUMPER
BODY
Short Aluminum 2nd Gen Pumper
CHASSIS
Enforcer Chassis
ELECTRICAL SYSTEM
Hard Wired

CHASSIS
AXLE, FRONT, CUSTOM
21,500 Lb Meritor Axle

AXLE, REAR
24,000 Lb Meritor Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
Allison 6th Gen, 4000 EVS P

BUMPER
22" Extended Painted Steel

CAB
7000 Enforcer Cab

BODY

TOTAL TANK CAPACITY
750 Gallon New York Style Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL CAPACITY
Foam Cell Not Required

COMPT, PUMPER, REAR
30.75" FF Open Restraint Rear Compt.

COMPT, PUMPER, LEFT SIDE
145" Lap Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE
145" Lap Low FDLER





FIRE SUPPRESSION
PUMPHOUSE
45" Control Zone Side Mount
PUMP
1500 GPM Waterous CSU
CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity
CROSSLAYS, 2.50"
2.50" Crosslay Not Required
SPEEDLAYS
Speedlays Not Required
GENERATOR
Generator Not Required
FOAM SYSTEM
Foam System Not Required

SAFETY


Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED PER ORDER
2. BATTERY CHARGER INDICATOR LOCATED PER ORDER
3. KUSSMAUL 120V SHORELINE RECEPTACLE WITH SUPER AUTO EJECT LOCATED ON DRIVER'S SIDE STEP WELL
4. THREE ADJUSTABLE SHELVES LOCATED PER ORDER
5. 2.50" OUTLET W/ 2.50" PLUMBING ON TOP OF THE LEFT SIDE OF THE BUMPER
6. AIR INLET W/ DISCONNECT COUPLING ON THE DRIVER'S SIDE STEPWELL
7. THREE TOOLBOARDS LOCATED PER ORDER
8. ONE VERTICAL PARTITION LOCATED PER ORDER

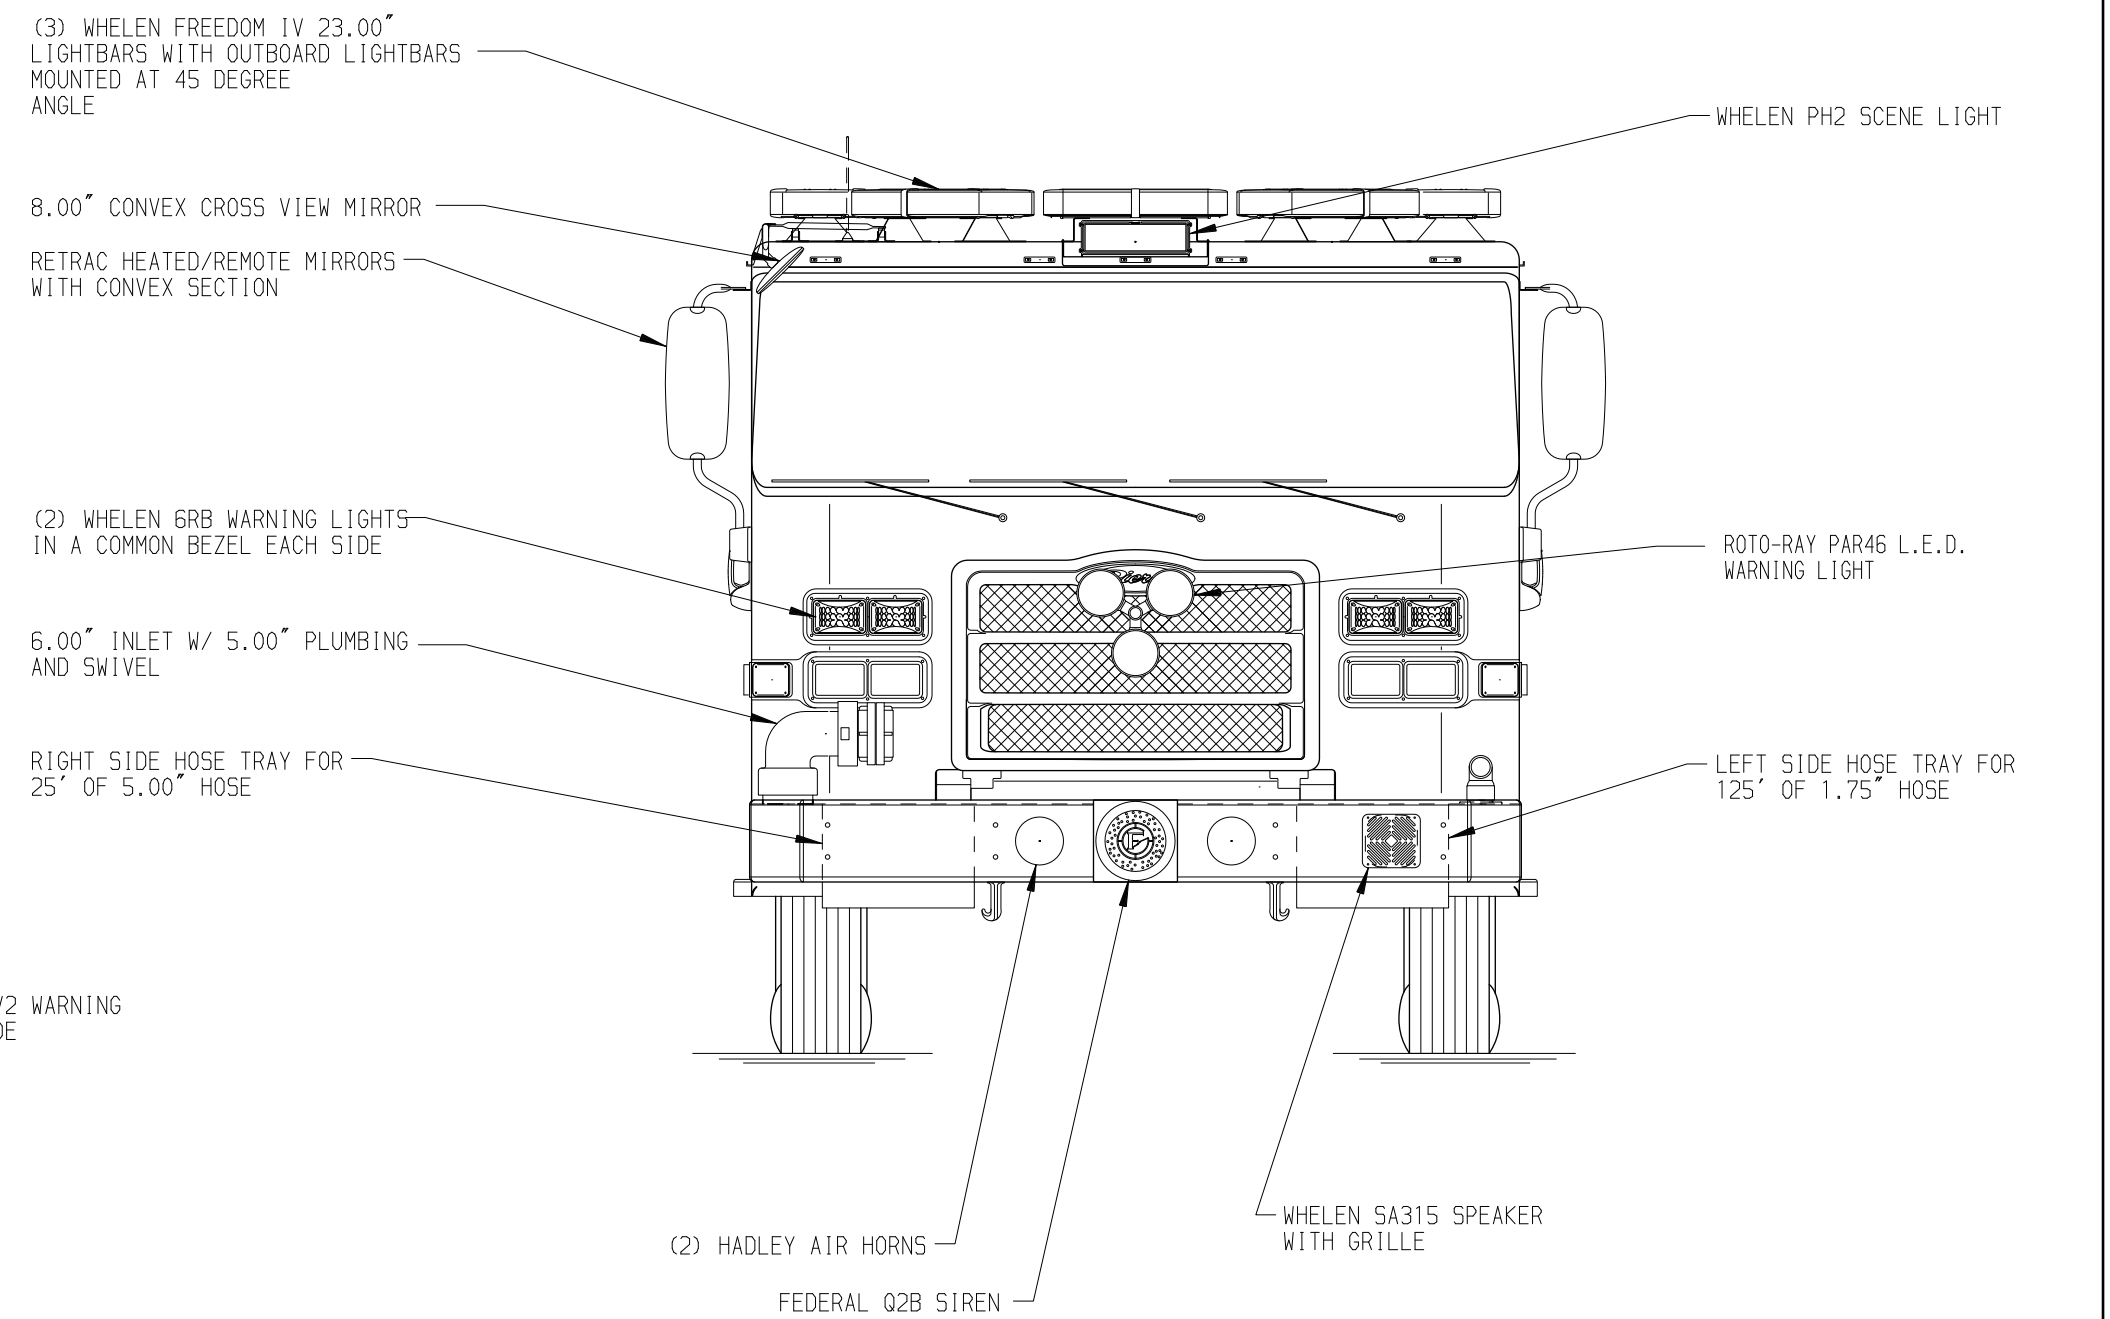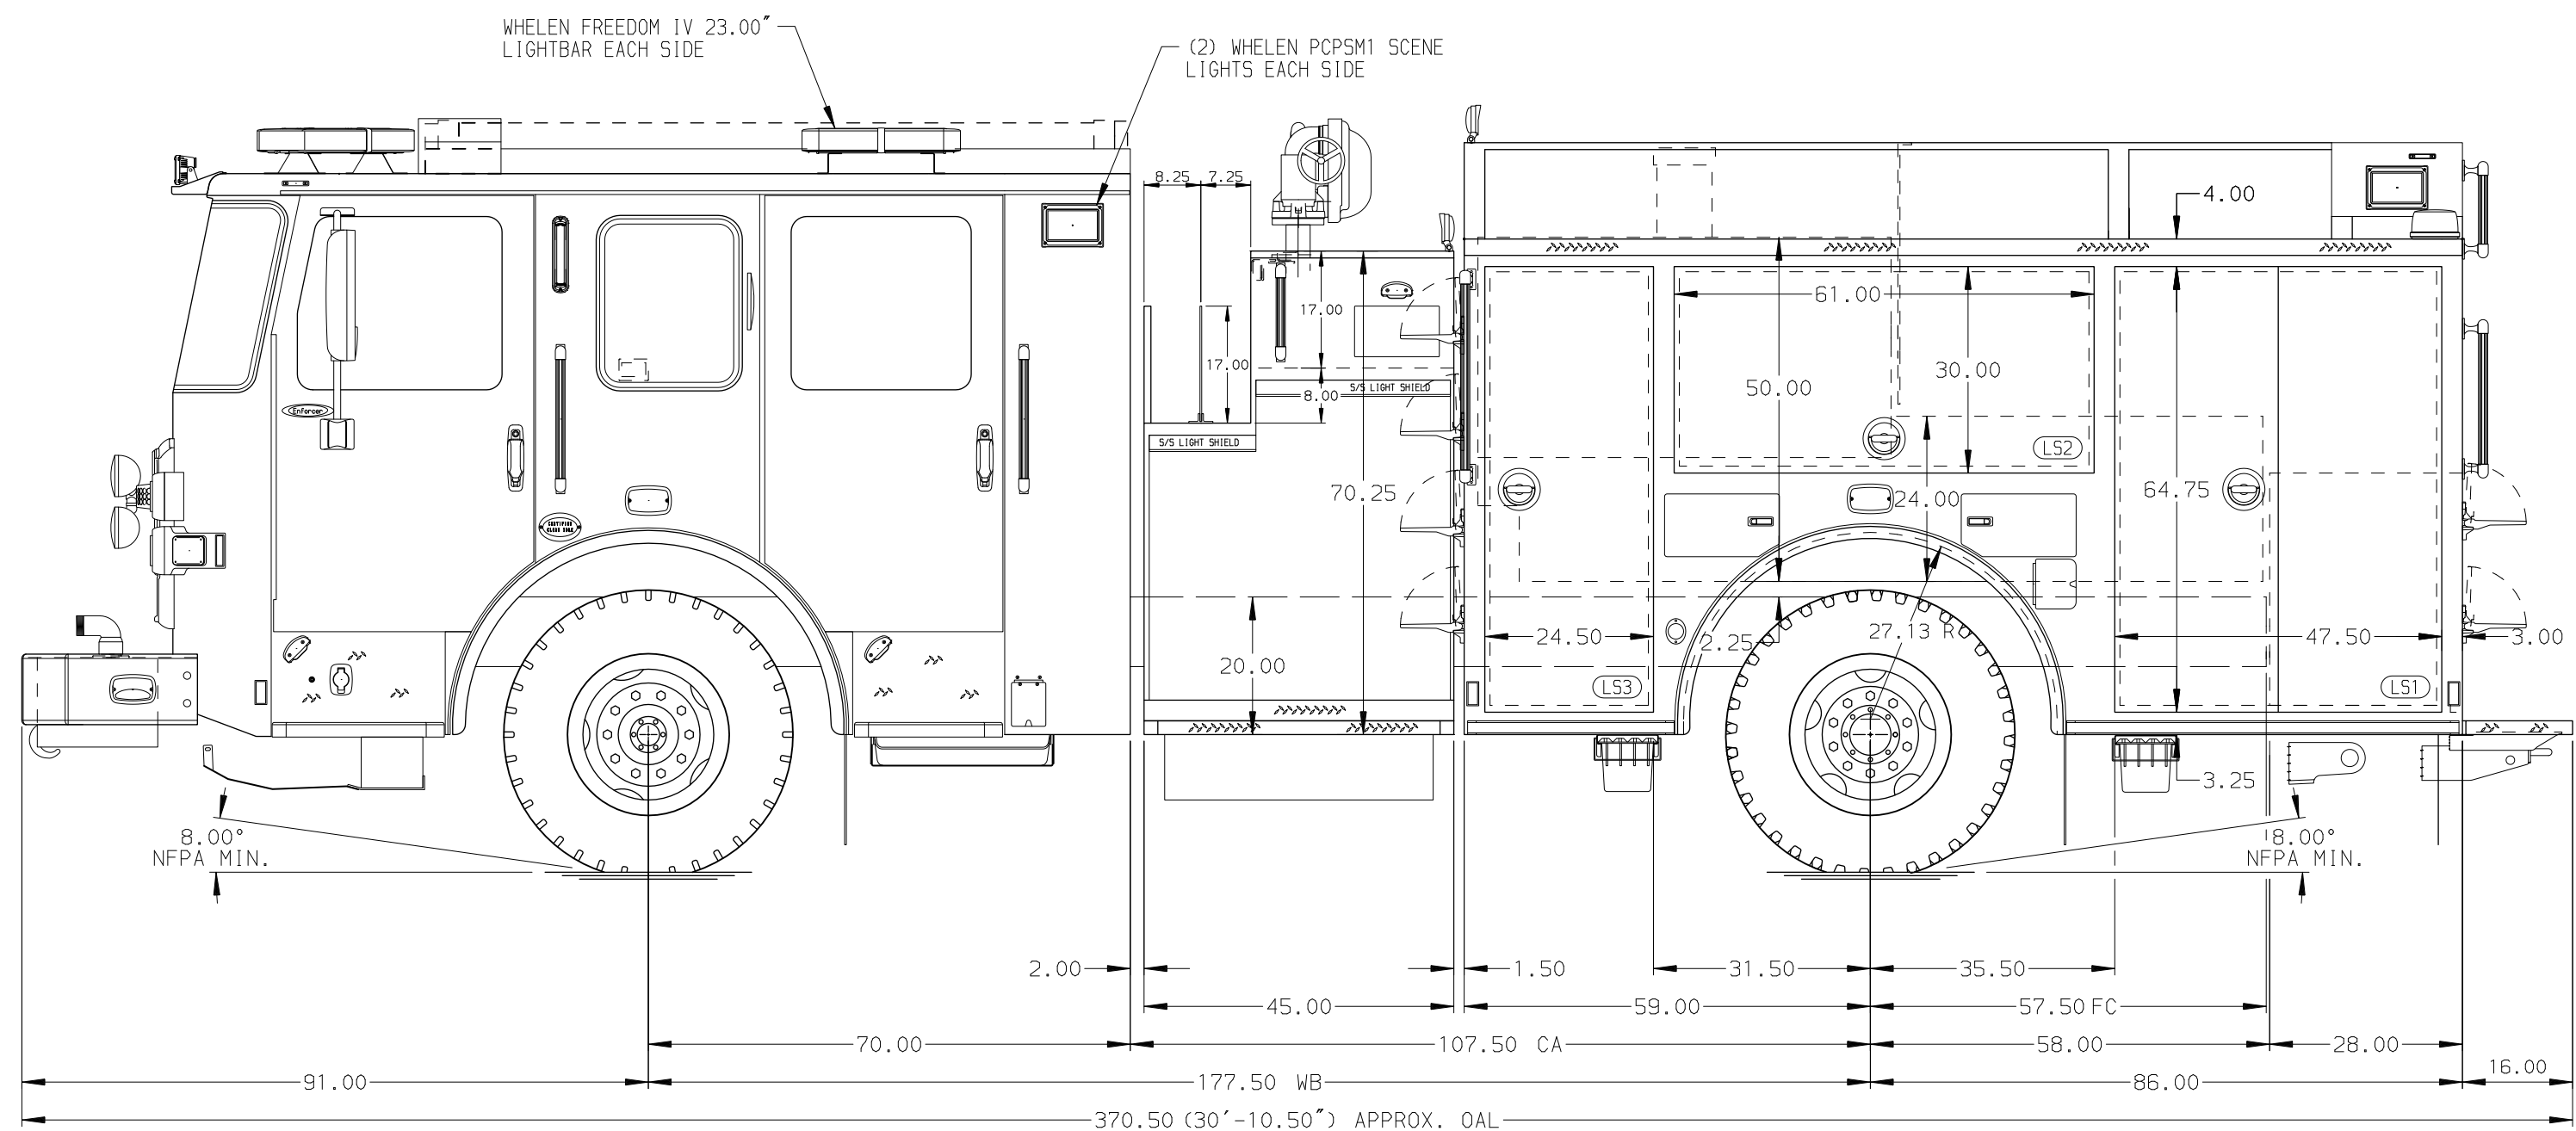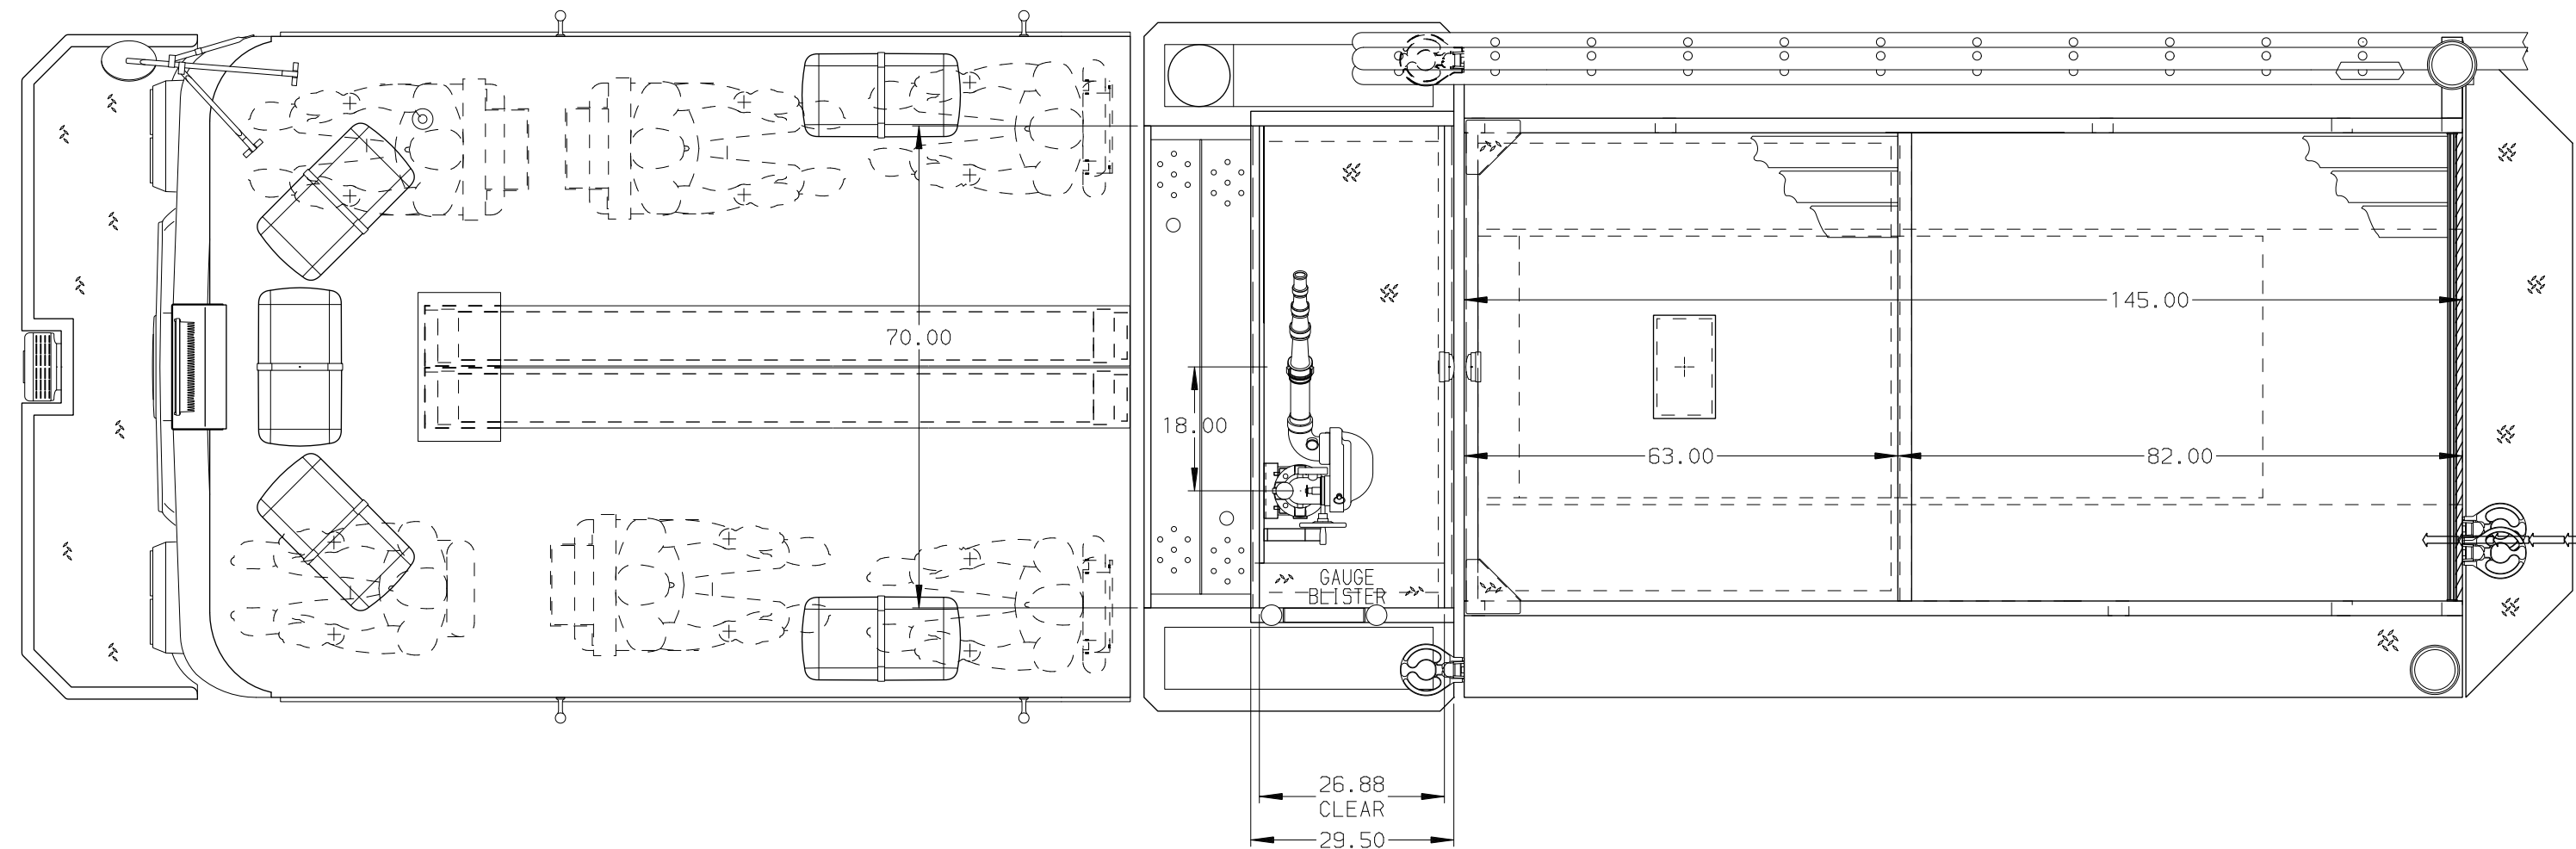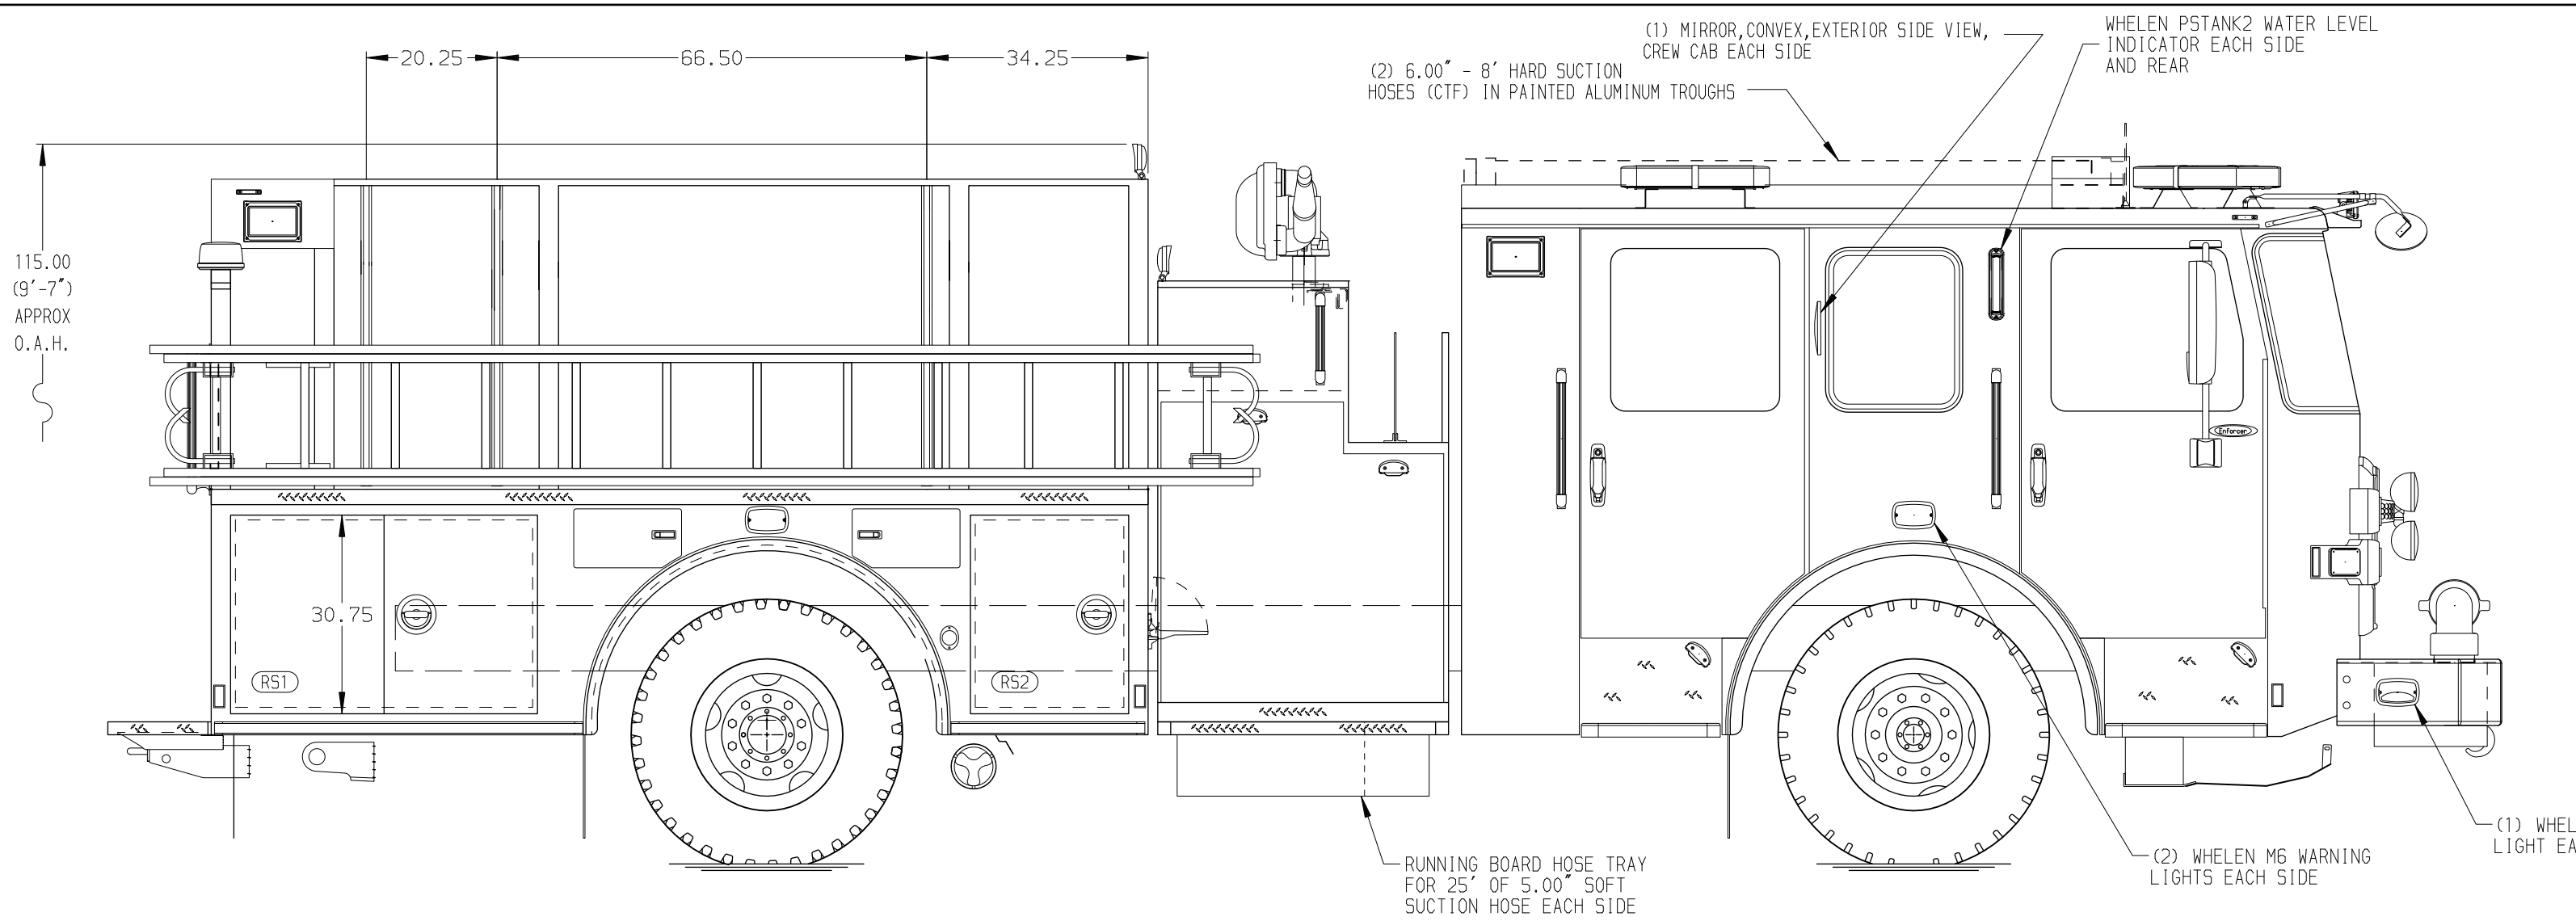

HOSEBED CAPACITIES	
①	200' OF 1.75" D.J. POLY HOSE
②	400' OF 2.50" D.J. POLY HOSE
③	1000' OF 5.00" D.J. POLY HOSE
④	200' OF 1.75" D.J. POLY HOSE
⑤	OPEN BED

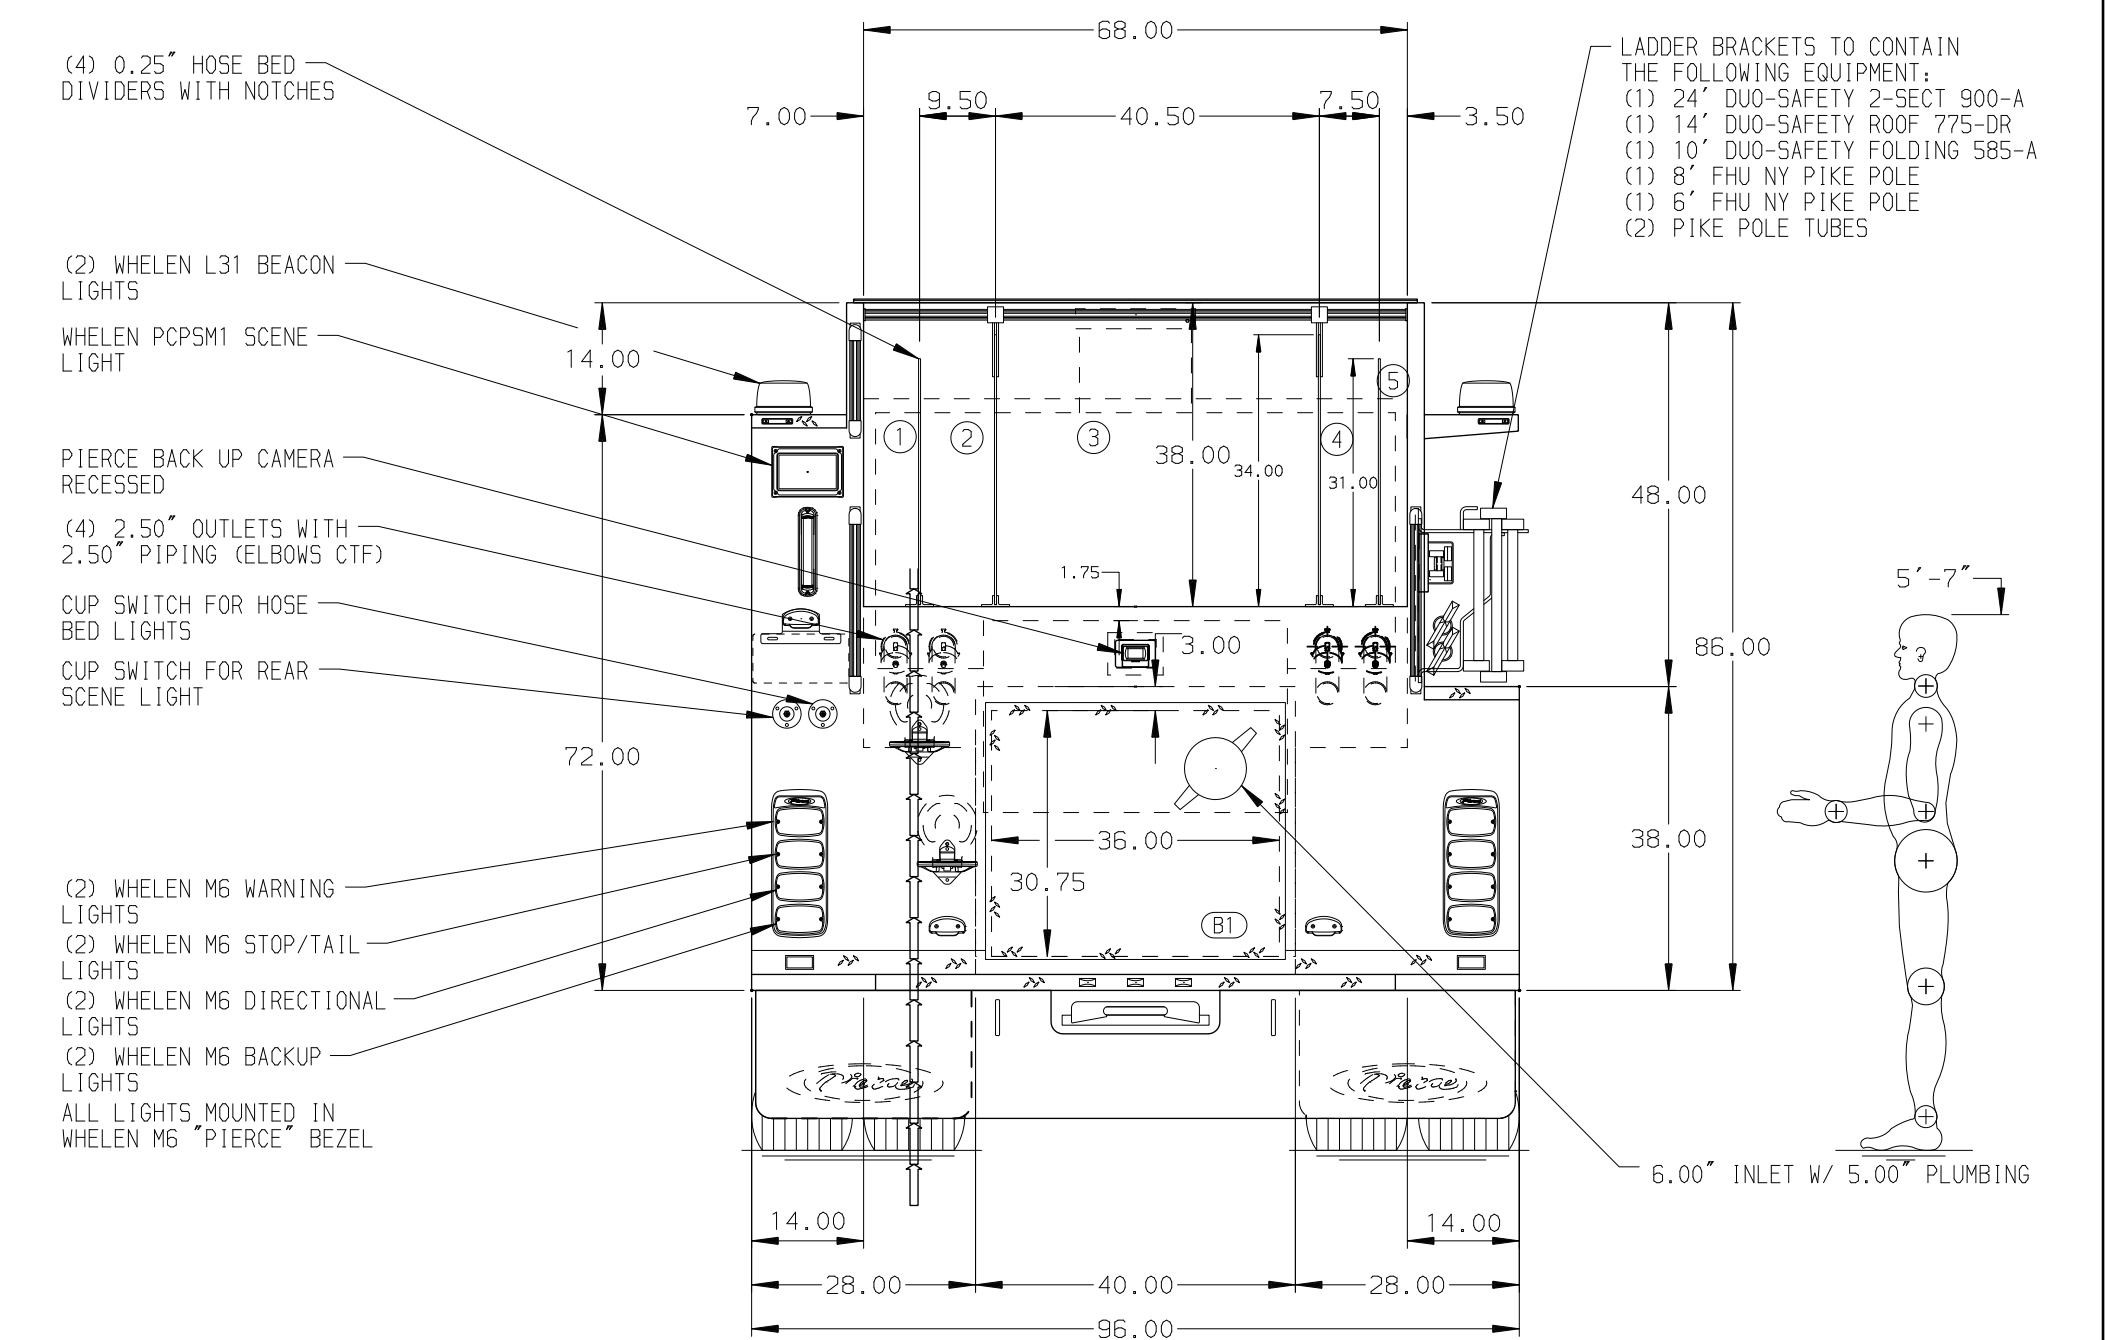

 MANUFACTURING INC.		JOB NO.	41531
		SCALE 1:24	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY LST	220CT25
FOR	Salisbury Fire Department	CHECKED BY MMF	220CT25
DWG NO.	41531 AD		SHEET SIZE D SHEET NO. 1 OF 1