

Medium Aluminum 2nd Gen Pump
CHASSIS
Enforcer Chassis
ELECTRICAL SYSTEM
MUX

19,500 lb TAK-4 Axle
AXLE, REAR
24,000 lb Meritor Axle

510 HP Paccar MX13 Engine

ALLison 6th Gen, 4000 EVS P

19" Extended Stainless Steel

7010 Enforcer Cab

770 Gallon New York Style Poly Tank

750 Gallons of Water

20 Gallon Foam Cell

30.75" FF Rollup Rear Compt

ER

FR

48" Control Zone Side Mount

1500 GPM Waterous CSU

(2) 1.50" Standard Capacity

(1) 2.50" Standard Capacity





Speedlays Not Required

Generator Not Required

Husky 3 Foam System

1. ONE 1.50 OULET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP OF RIGHT BUMPER
2. SHORELINE RECEPTACLE WITH KUSSEMAN SUPER AUTO-EJECT LOCATED ON DRIVER SIDE STEPPWELL
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPPWELL
4. BATTERY CHARGER LOCATED PER ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
6. ELEVEN ADJUSTABLE SHELVES LOCATED PER ORDER
7. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
8. ONE SLIDE-OUT TRAY LOCATED PER ORDER
9. ONE SWING-OUT TOOLBOARD LOCATED PER ORDER
10. TWO MOUNTING PLATES LOCATED PER ORDER

11. EXTINGUISHER STORAGE RACK LOCATED PER ORDER

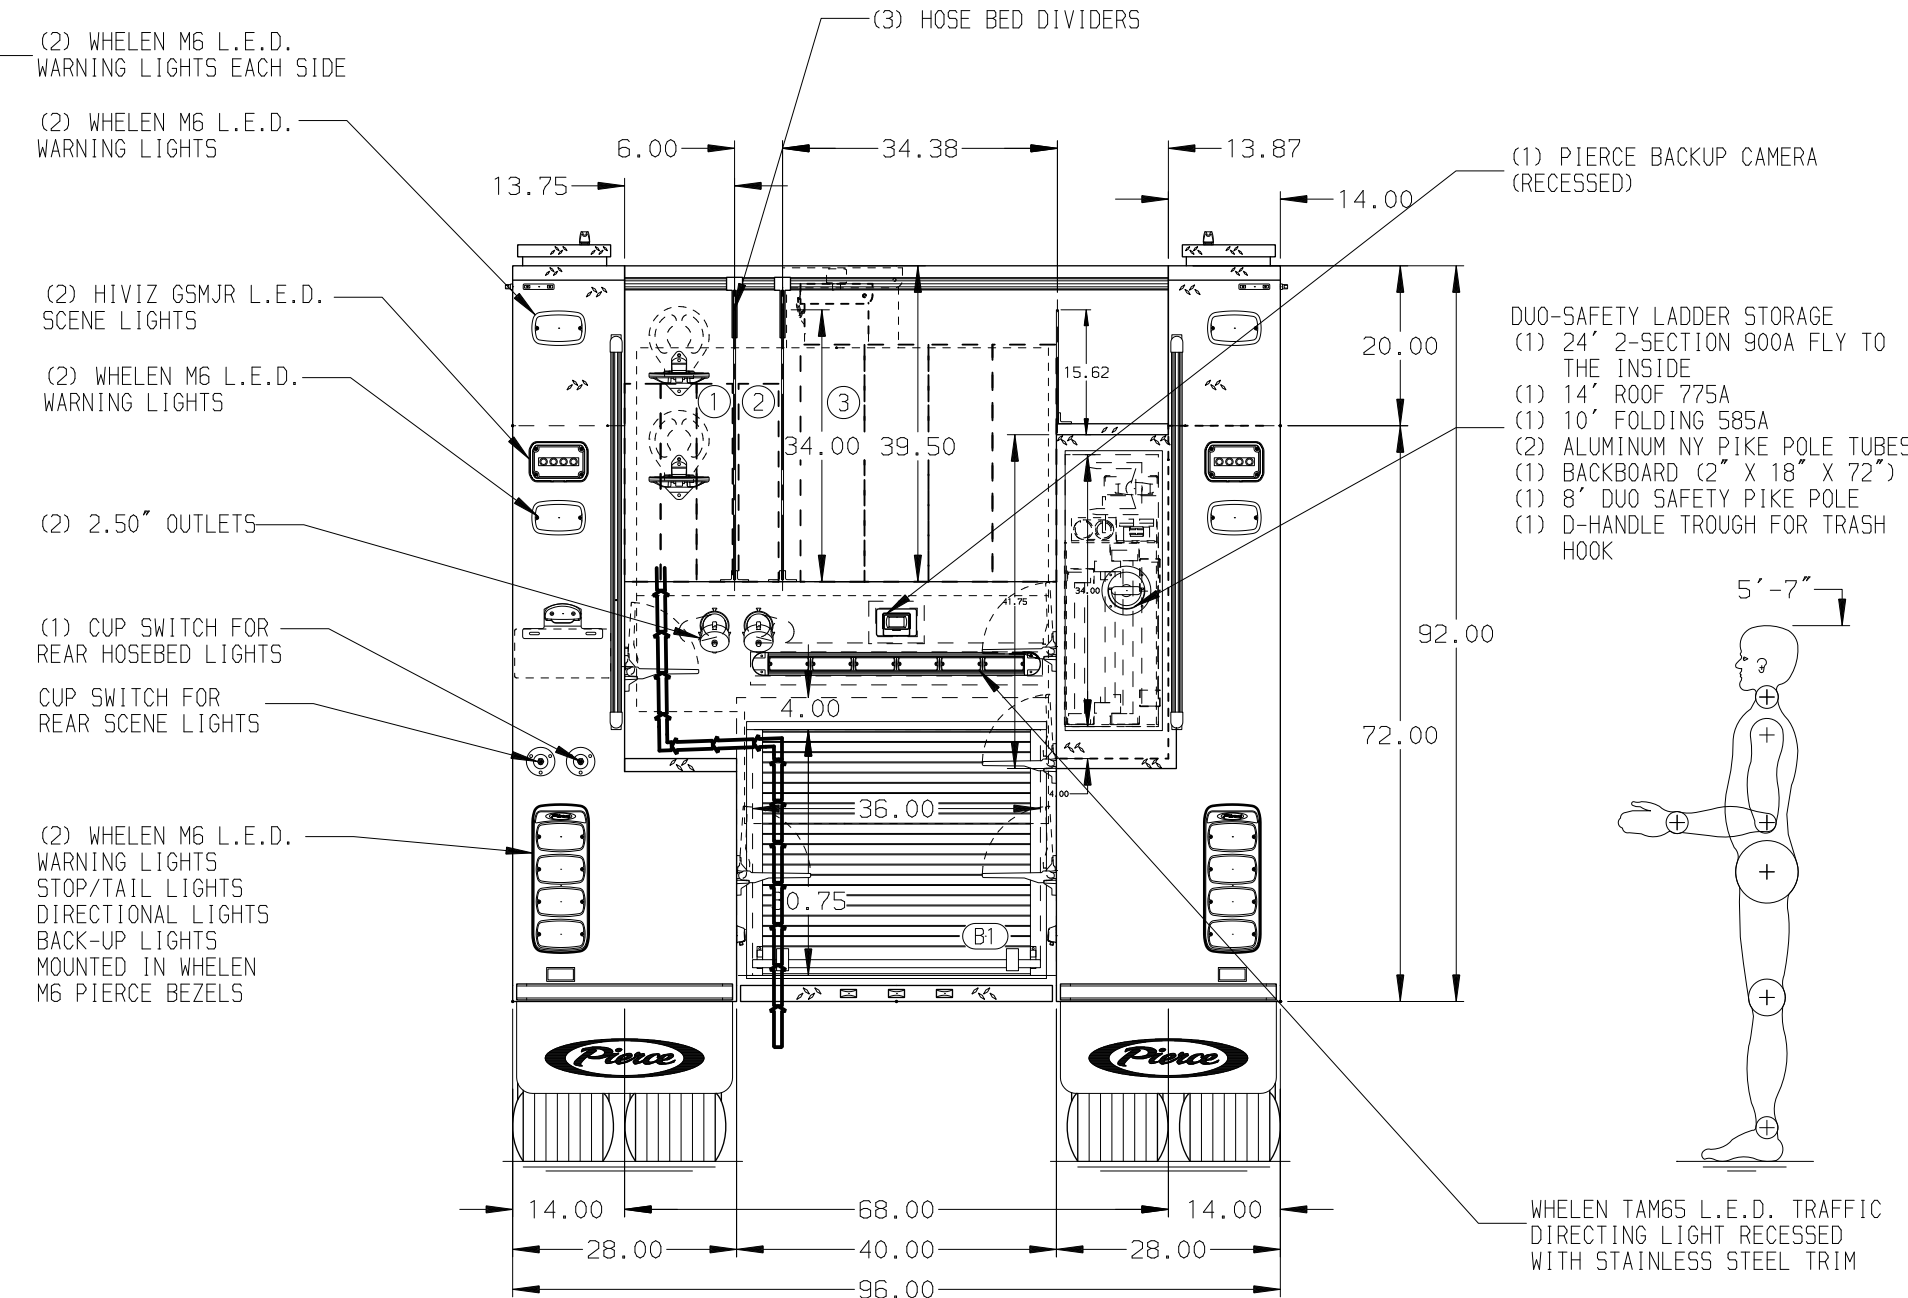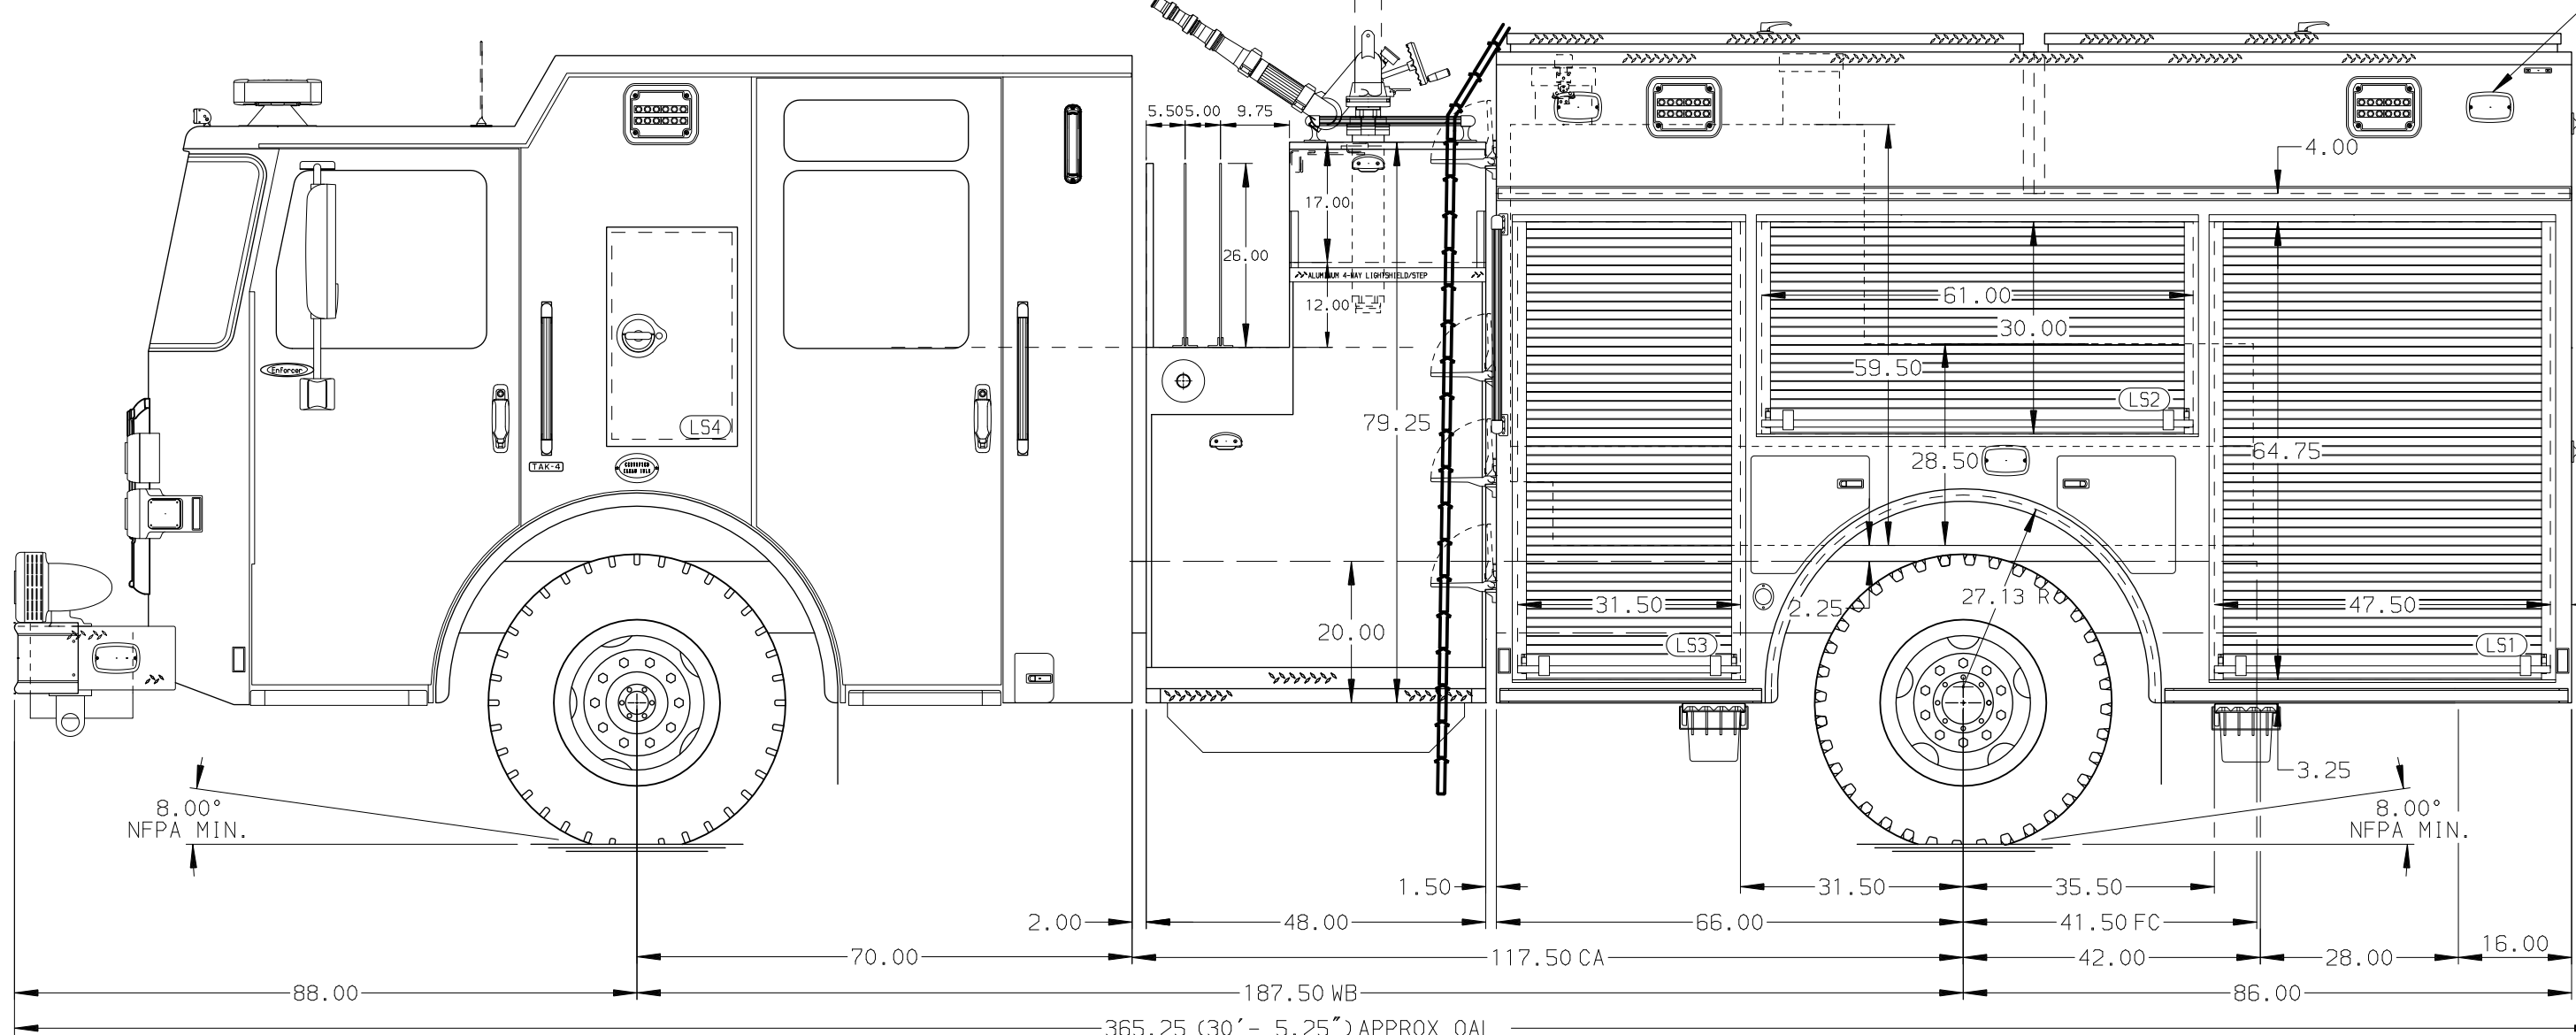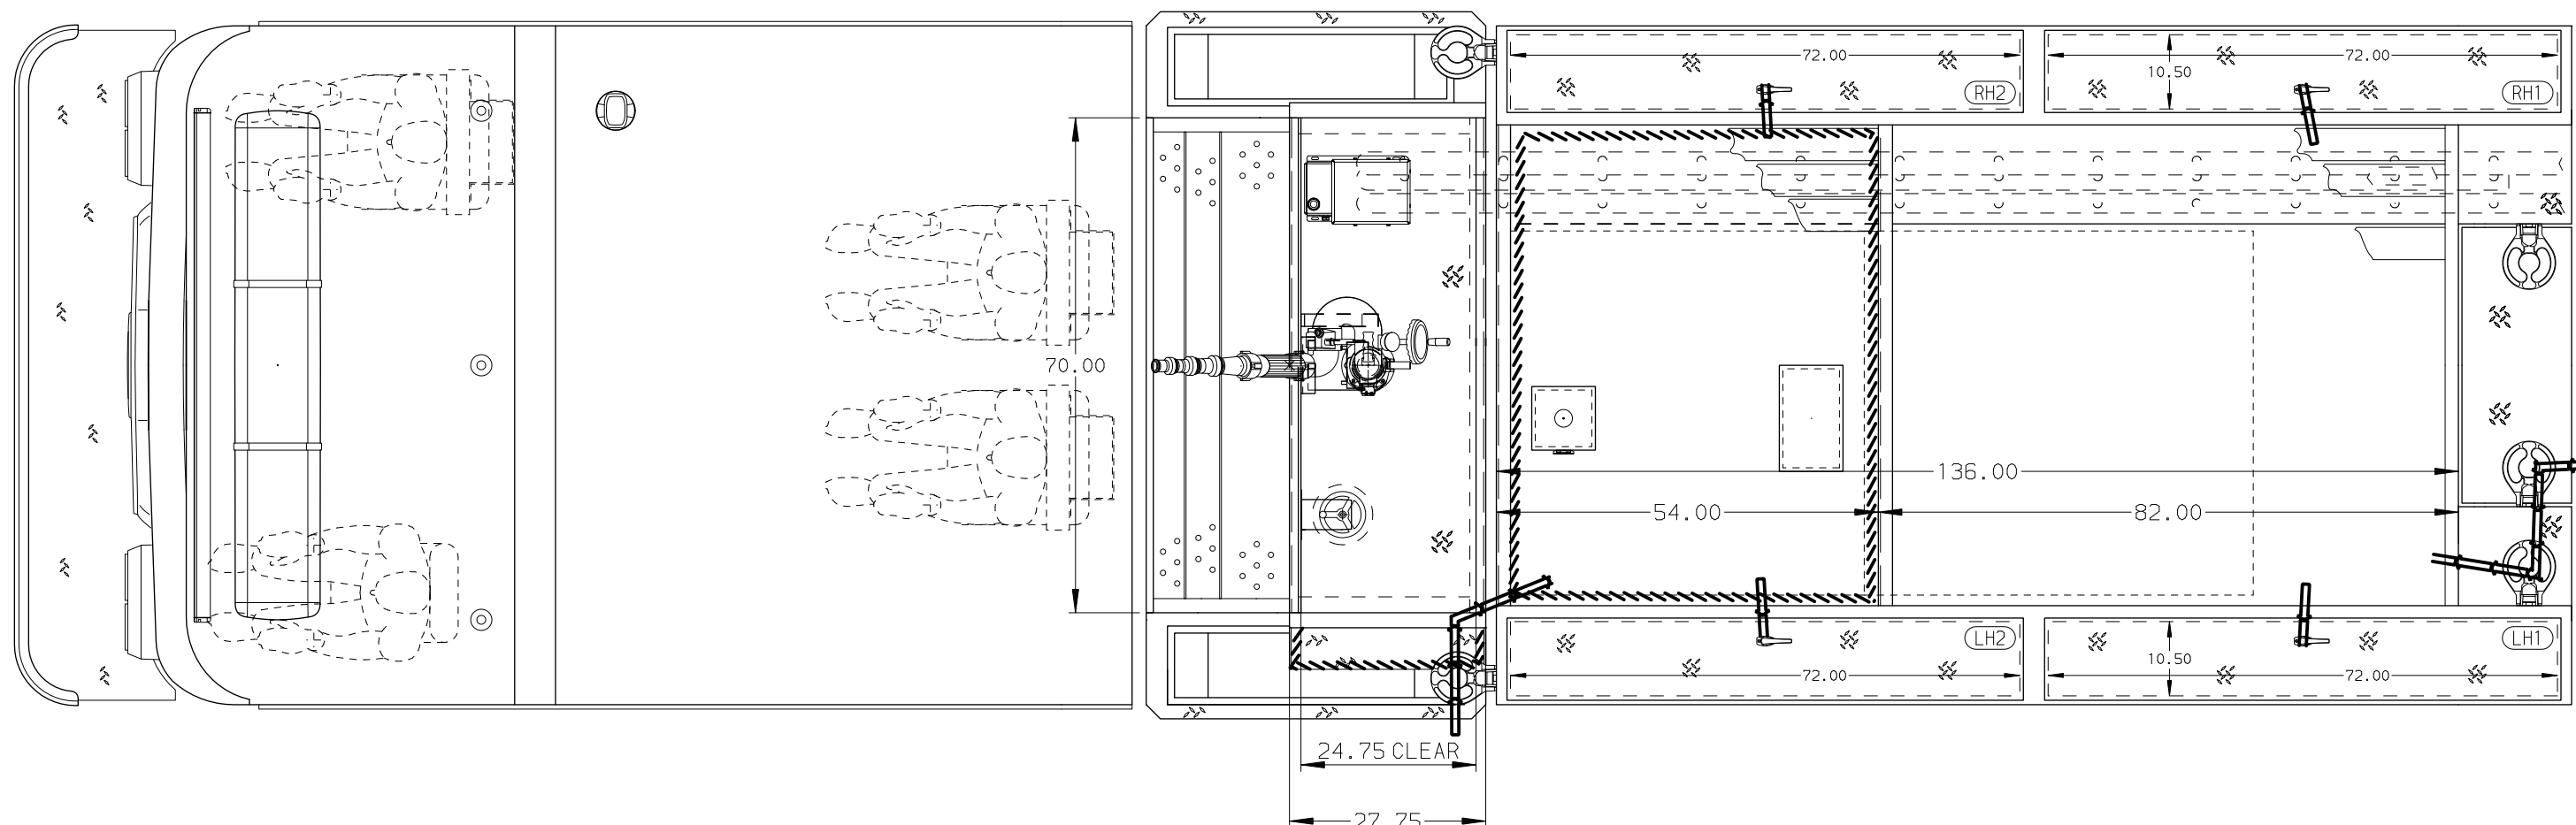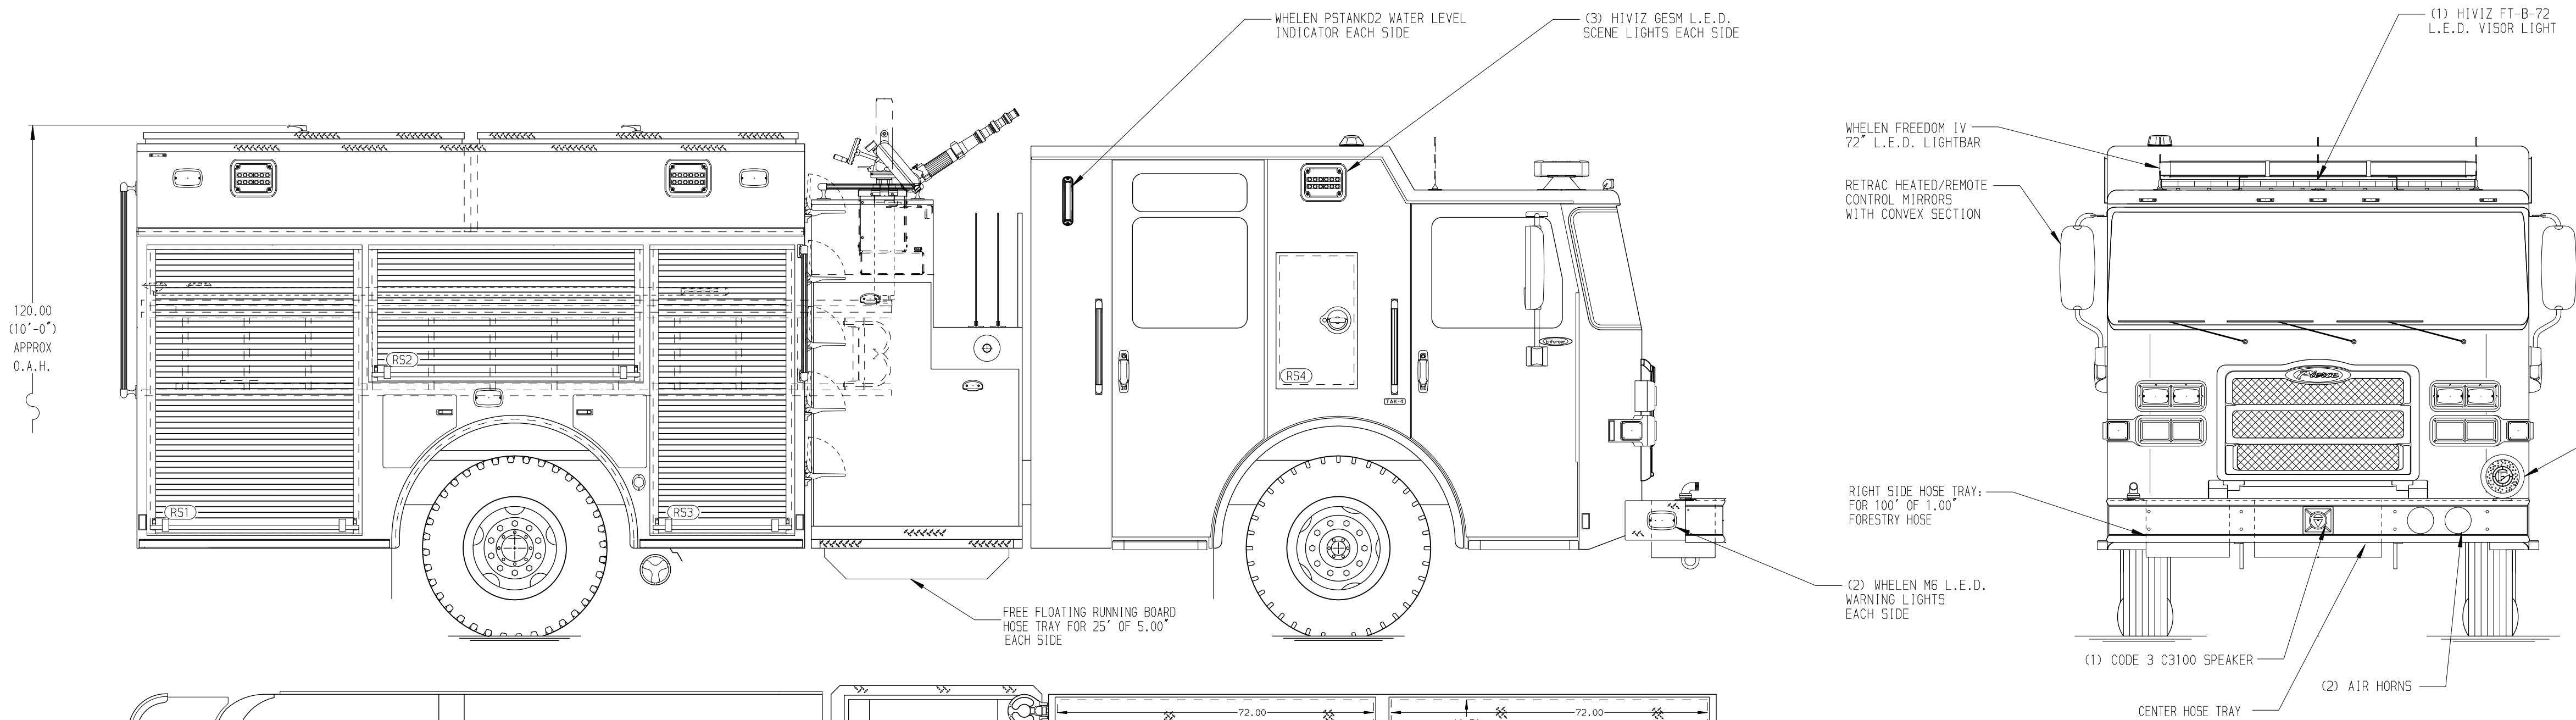

 MANUFACTURING INC.		JOB NO.	41592 01-02
		SCALE 1:24	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY JAM	19SEP25
FOR	Clark-Cowlitz Fire Rescue	CHECKED BY MMF	19SEP25
DWG NO.	41592AD	SHEET SIZE D	SHEET NO. 1 OF 1