

PUMPER  
BODY  
Long Aluminum 2nd Gen Pumper  
CHASSIS  
Enforcer Chassis  
ELECTRICAL SYSTEM  
Hard Wired

CHASSIS  
AXLE, FRONT, CUSTOM  
19,500 lb TAK-4 Axle  
AXLE, REAR  
27,000 lb Meritor Axle  
ENGINE  
510 HP Paccar MX13 Engine  
TRANSMISSION  
Allison 6th Gen, 4500 EVS P  
BUMPER  
19" Extended Pointed Steel  
CAB  
7010 Enforcer Cab



BODY  
TOTAL TANK CAPACITY  
780 Gallon New York Style Poly Tank  
WATER CAPACITY  
750 Gallons of Water  
FOAM CELL CAPACITY  
30 Gallon Foam Cell  
COMPT, PUMPER, REAR  
30.75" FF RollUp Rear Compt  
COMPT, PUMPER, LEFT SIDE  
161" RollUp Full Height Front & Rear FDLER  
COMPT, PUMPER, RIGHT SIDE  
161" RollUp Full Height Front & Rear FDLER

FIRE SUPPRESSION  
PUMPHOUSE  
48" Control Zone Side Mount  
PUMP  
1500 GPM Waterous CSU  
CROSSLAYS, 1.50"  
1.50" Crosslays Not Required  
CROSSLAYS, 2.50"  
2.50" Crosslay Not Required  
SPEEDLAYS  
Speedlays Not Required  
GENERATOR  
Generator Not Required  
FOAM SYSTEM  
Husky 3 Single Agent Foam System


NOTE  
DIMENSIONS SHOWN ARE APPROXIMATE  
AND ARE SUBJECT TO MINOR DEVIATIONS  
AS MAY OCCUR OR BE NECESSARY IN  
CONSTRUCTION.  
MINOR DETAILS NOT SHOWN.

1. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED AND CARGO AREA  
2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPMELL  
3. BATTERY CHARGER LOCATED PER ORDER  
4. BATTERY CHARGE INDICATOR LOCATED BEHIND DRIVER'S SIDE CAB WINDOW  
5. TWO WOODEN HWG-SB WHEEL CHOCKS TO BE PROVIDED, MOUNTING TO BE PROVIDED BY CUSTOMER  
6. PARTITION BETWEEN COMPARTMENTS LSI/B1 AND RS1/B1  
7. EIGHT FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER ORDER  
8. DURA SURF LINING LOCATED PER ORDER  
9. TWO HANGERS/POSTS LOCATED PER ORDER

10. TWO EQUIPMENT STORAGE RACKS WITH ONE SLOT LOCATED PER ORDER  
11. ALUMINUM PEGBOARD ON BACK WALL OF COMPARTMENTS PER ORDER  
12. TWO HOSE STORAGE RACKS LOCATED PER ORDER  
13. TWO 120V DUPLEX RECEPTACLES LOCATED PER ORDER  
14. TWO FLOOR MOUNTED TRAYS WITH SIDE SLIDES LOCATED PER ORDER  
15. ONE SWINGOUT TOOLBOARD LOCATED PER ORDER  
16. AIR OUTLET WITH SHUTOFF VALVE LOCATED IN DRIVER'S SIDE PUMP PANEL

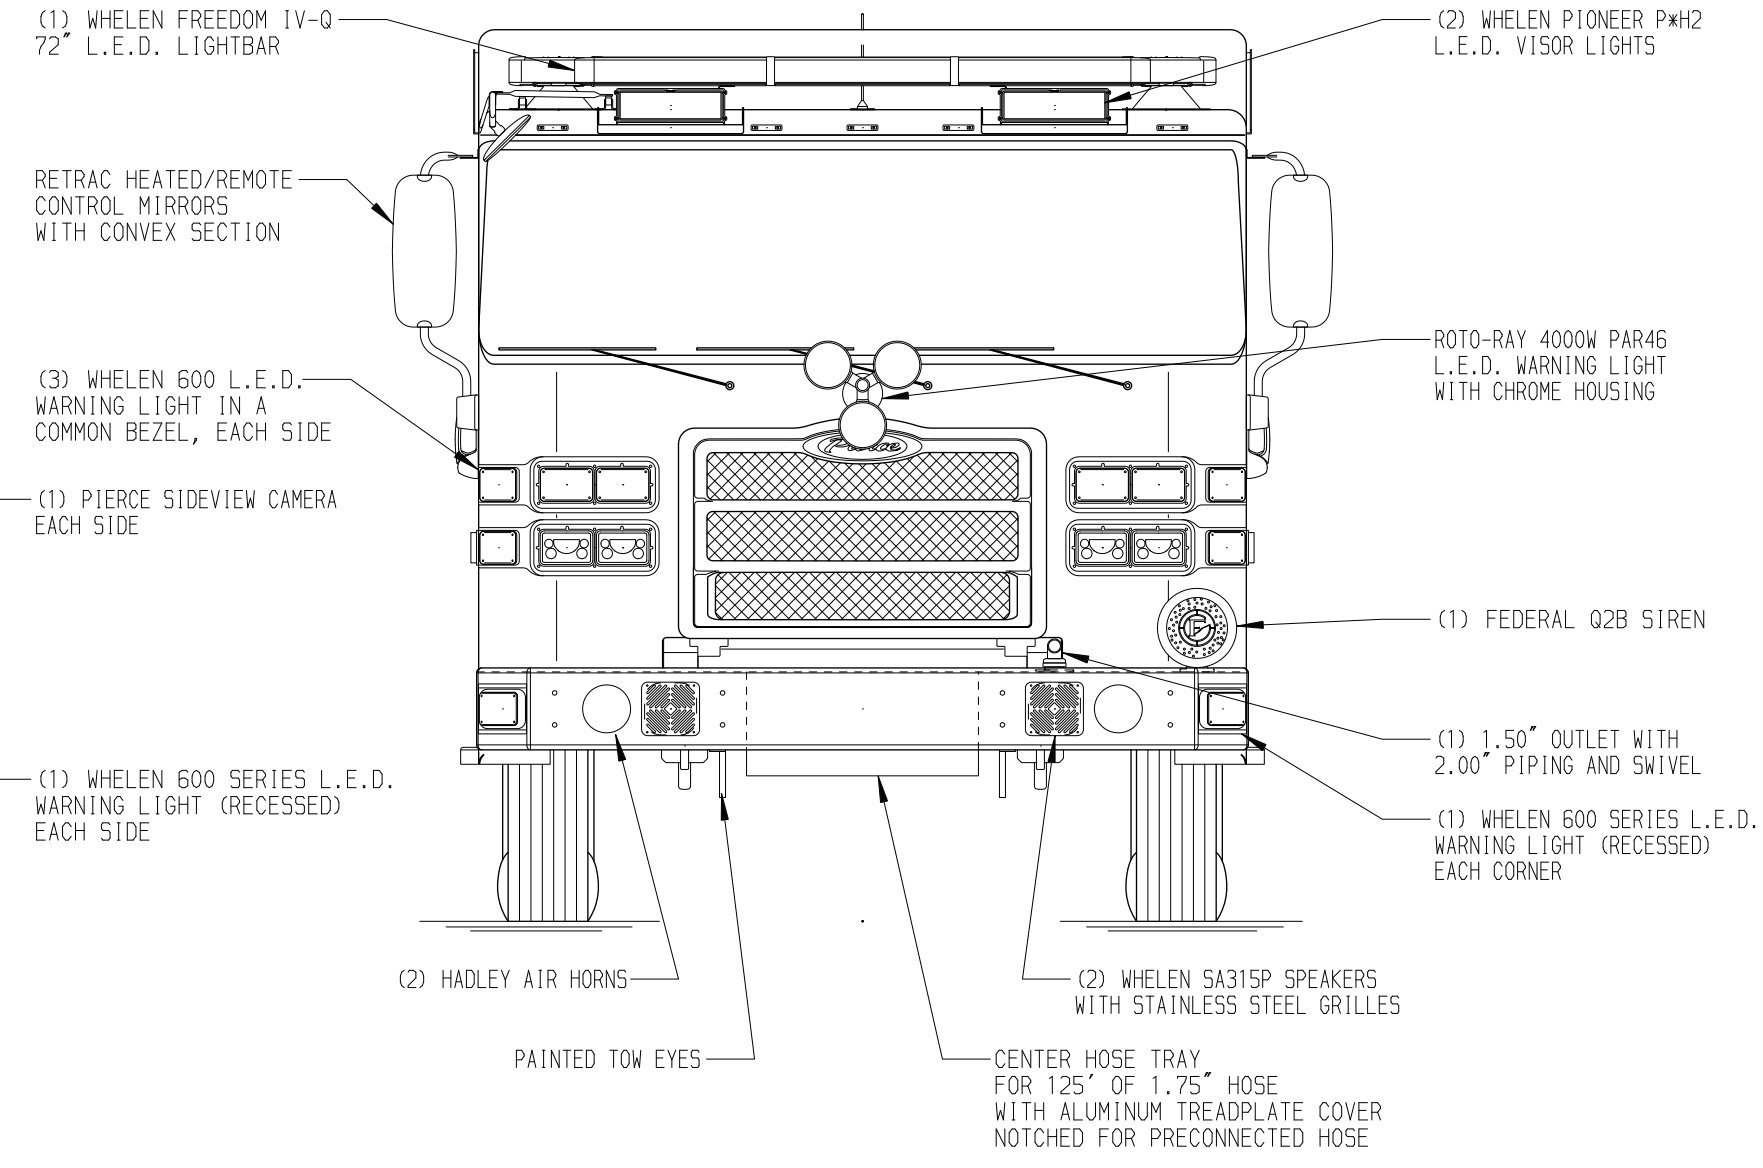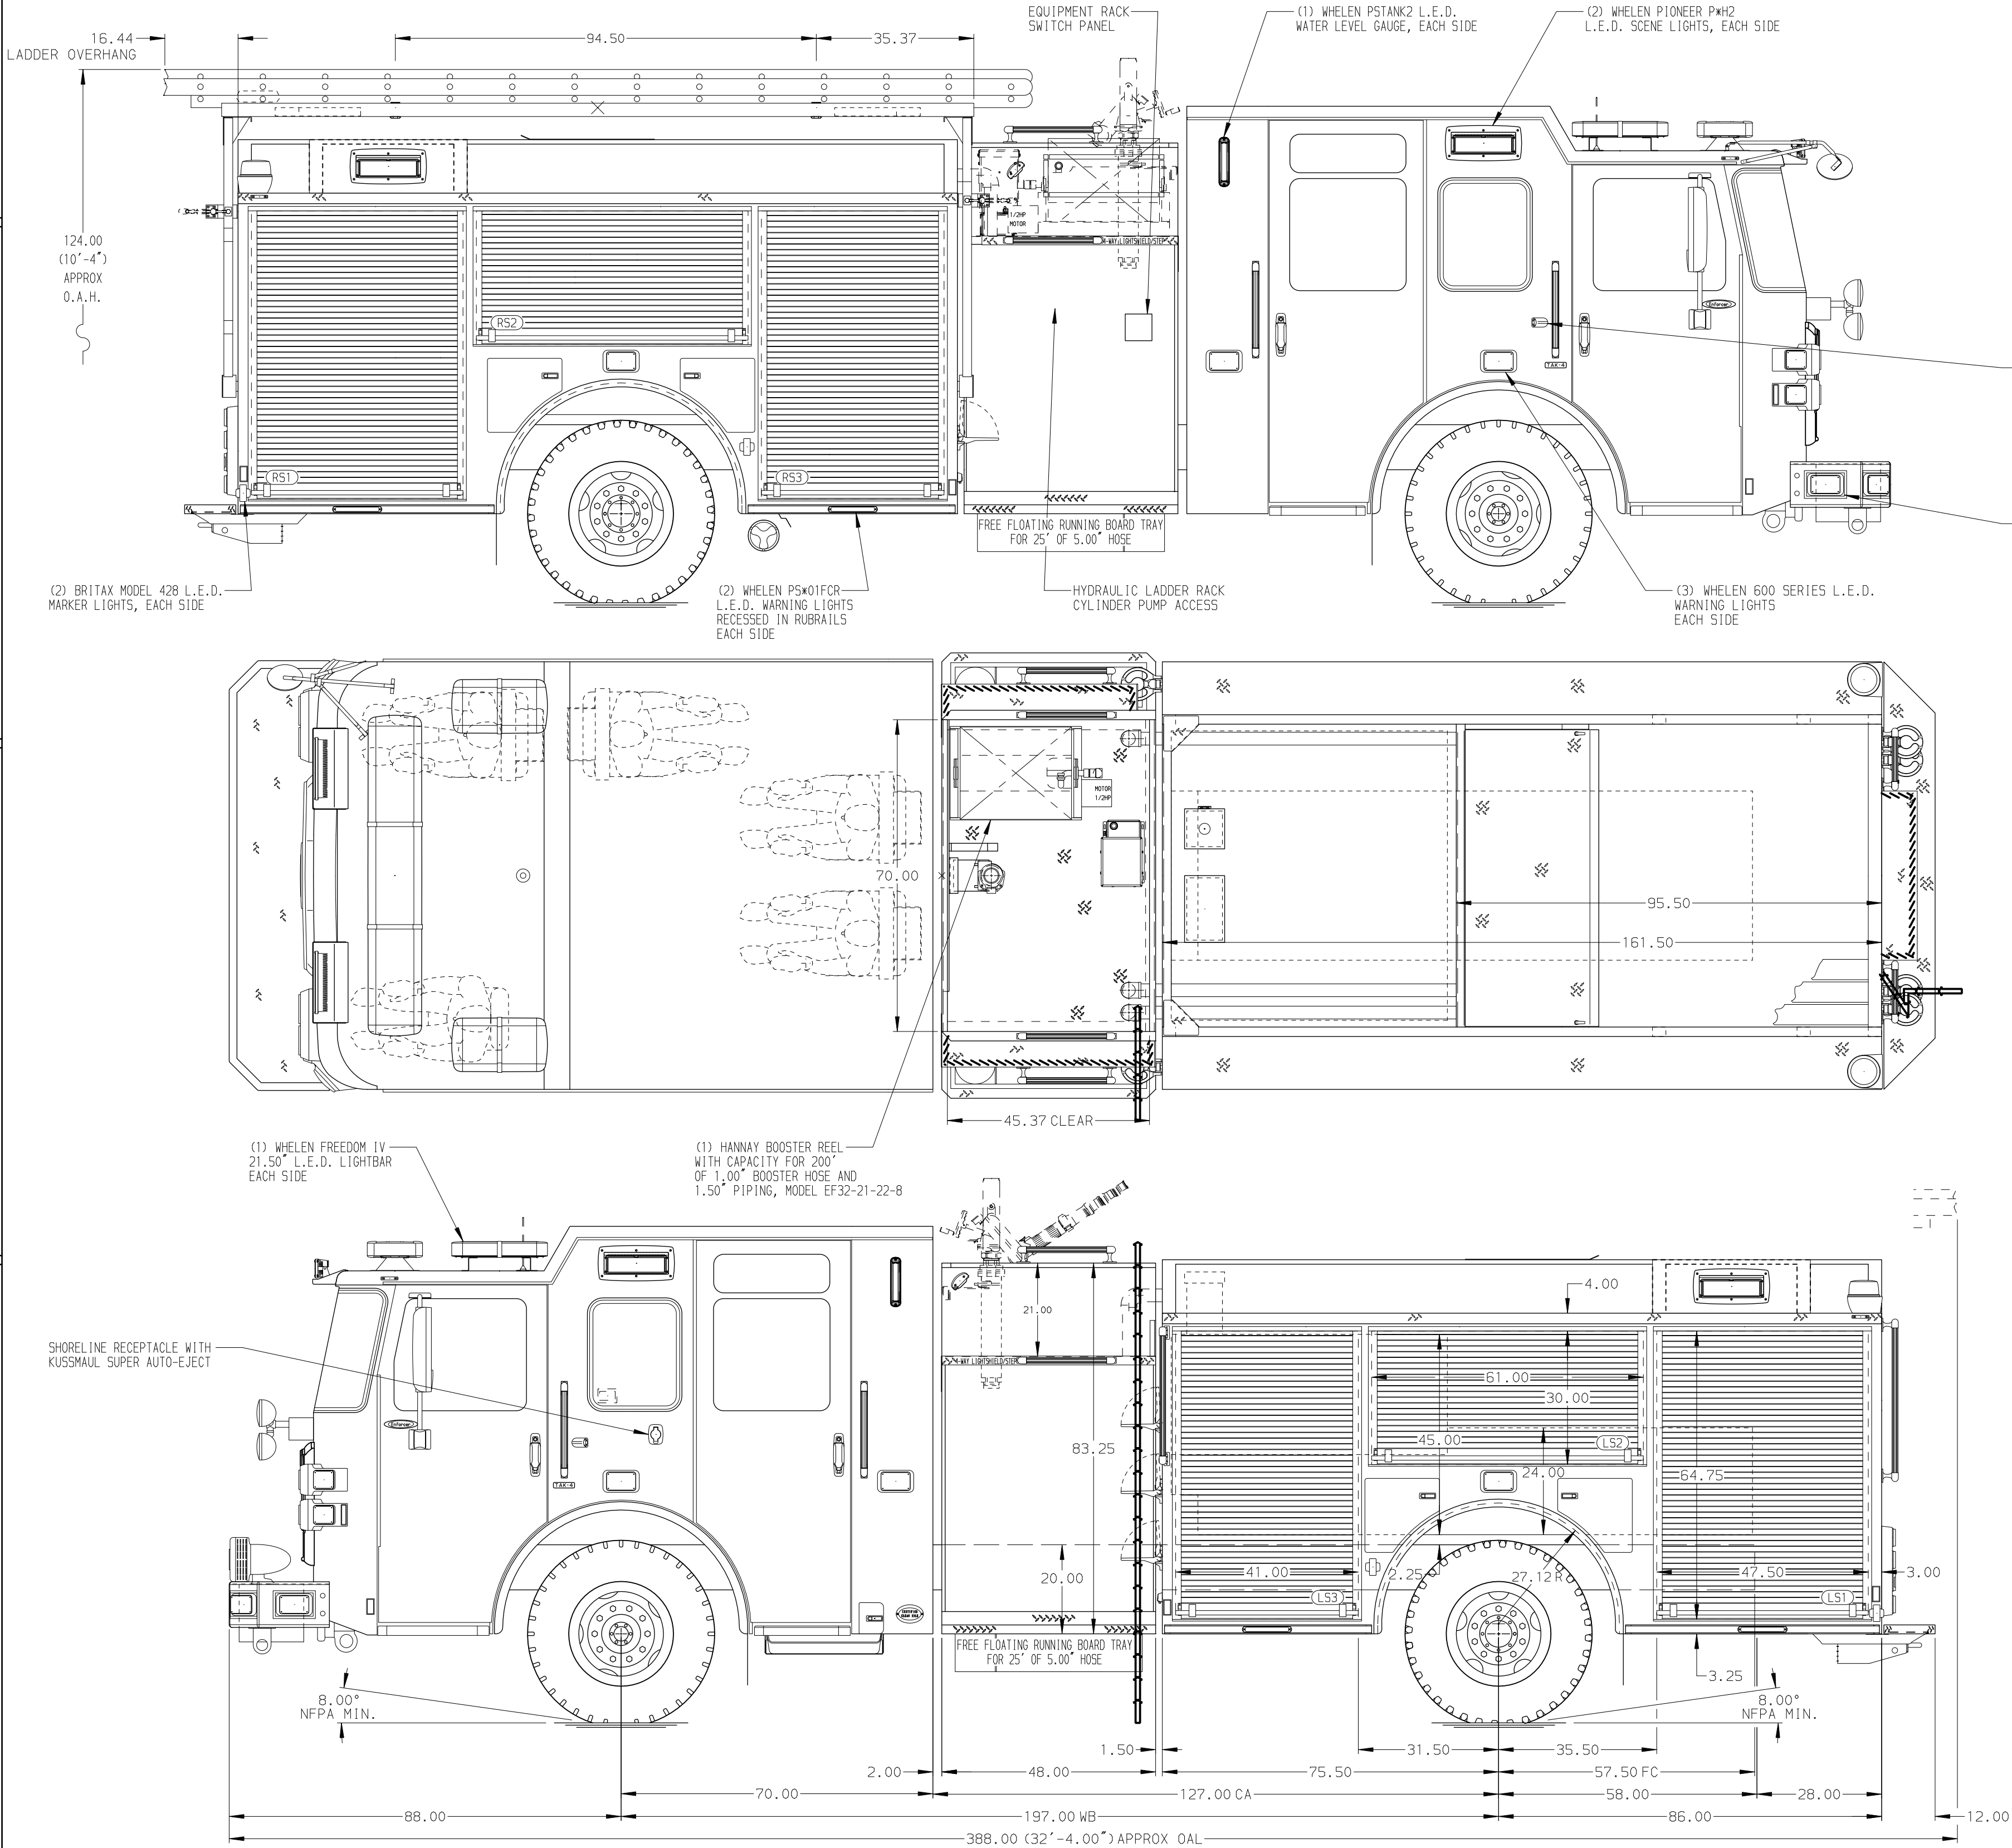

- HOSEBED CAPACITIES
- ① 200' OF 1.75" D.J. POLY HOSE
  - ② 200' OF 1.75" D.J. POLY HOSE
  - ③ 1000' OF 5.00" D.J. POLY HOSE
  - ④ 500' OF 2.50" D.J. POLY HOSE
  - ⑤ 250' OF 2.50" D.J. POLY HOSE

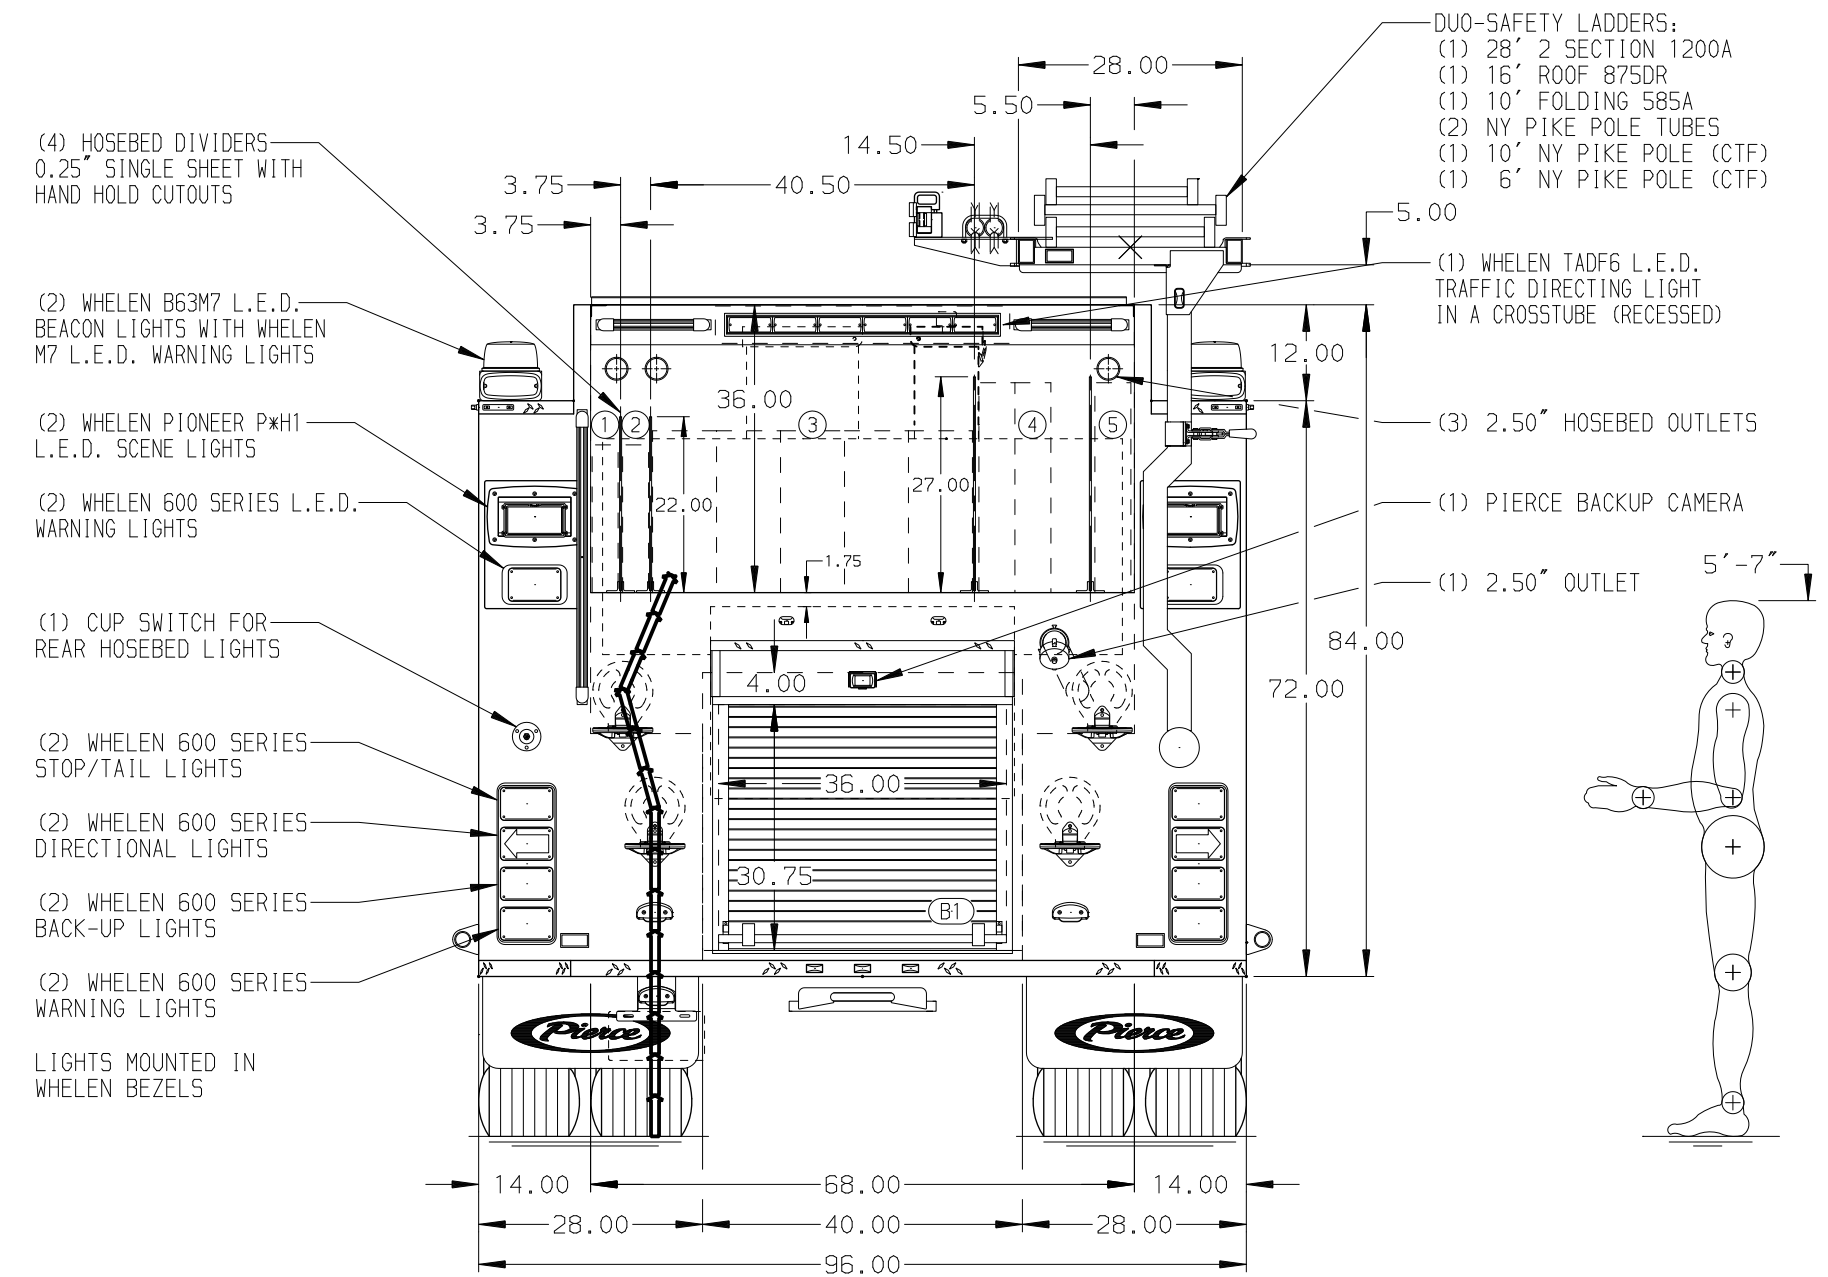

| Pierce MANUFACTURING INC. |  | JOB NO.                        | 41698   |
|---------------------------|--|--------------------------------|---------|
|                           |  | SCALE                          | 1:24    |
|                           |  | DATE                           |         |
| TITLE                     |  | Pierce Pumper Approval Drawing |         |
| FOR                       |  | Rock Hill Fire Department      |         |
|                           |  | DRAWN BY                       | JDA     |
|                           |  | CHECKED BY                     | MMF     |
|                           |  | DATE                           | 30MAY25 |
|                           |  | SHEET SIZE                     | D       |
|                           |  | SHEET NO.                      | 1 OF 1  |

| REV     | DATE | BY  | CH | ENFORCER |
|---------|------|-----|----|----------|
| 20AUG25 | JDA  | JKR |    |          |
| 24JUL25 | JDA  | JGO |    |          |

| TITLE   | Pierce Pumper Approval Drawing |
|---------|--------------------------------|
| FOR     | Rock Hill Fire Department      |
| DWG NO. | 41698AD                        |