

PUMPER

BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

ELECTRICAL SYSTEM

MUX

CHASSIS

AXLE, FRONT, CUSTOM

19,500 lb TAK-4 Axle

AXLE, REAR

24,000 lb Meritor Axle

ENGINE

510 HP Paccar MX13 Engine

TRANSMISSION

Allison 6th Gen, 4000 EVS P

BUMPER

22" Extended Stainless Steel

CAB

7010 Enforcer Cab

BODY

TOTAL TANK CAPACITY

750 Gallon New York Style Poly Tank

WATER CAPACITY

750 Gallons of Water

FOAM CELL CAPACITY

Foam Cell Not Required

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Comp

COMPT, PUMPER, LEFT SIDE

152" RollUp Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

152" RollUp Low FDLER

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(3) 1.50" Special Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

SpeedLays Not Required

GENERATOR

Generator Not Required

FOAM SYSTEM


Foam System Not Required

SAFETY

Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED PER ORDER
2. BATTERY CHARGER LOCATED PER ORDER
3. BATTERY CHARGER INDICATOR LOCATED PER ORDER
4. ONE 120V SIX PLACE RECEPTACLE STRIP LOCATED IN THE CAB PER ORDER
5. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT THE REAR

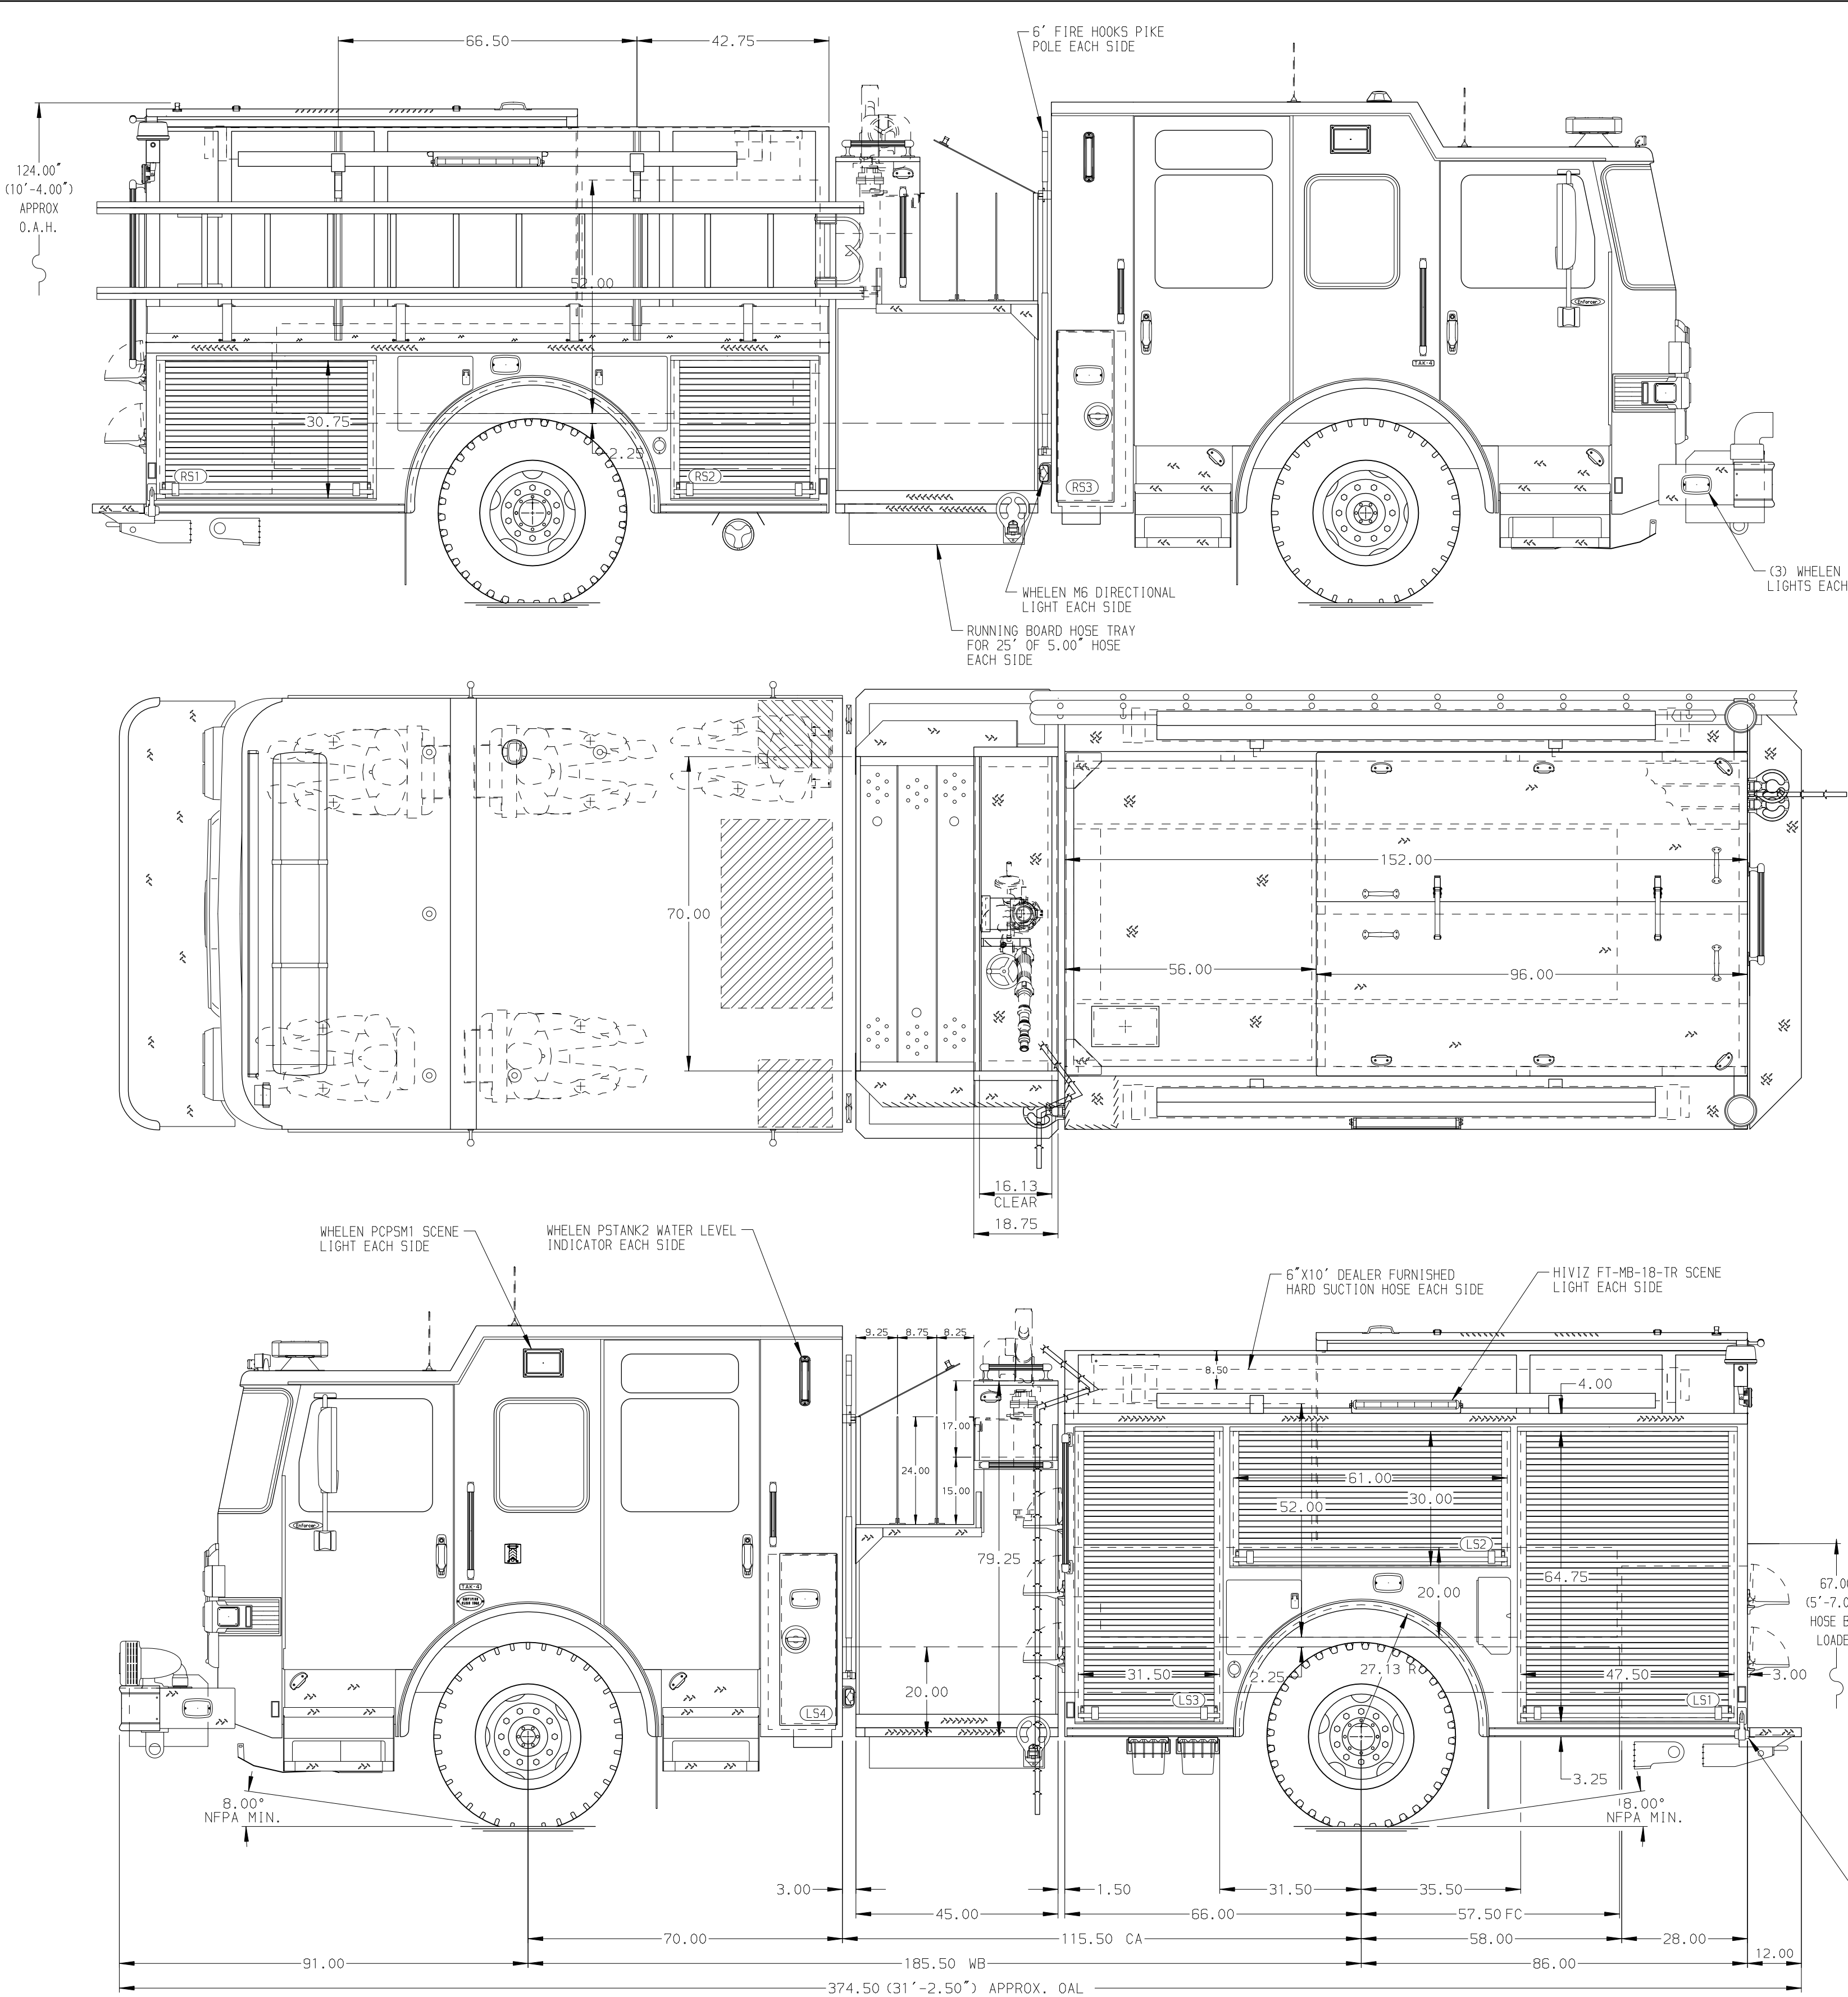

WHELEN FREEDOM 1V 72.00" LIGHTBAR

HIVIZ FT-B-72 SCENE LIGHT

RETRAC HEATED/REMOTE MIRRORS WITH CONVEX SECTION

ROTO RAY 4000W WARNING LIGHT

(2) WHELEN M6 WARNING LIGHTS IN A COMMON BEZEL EACH SIDE

6.00" INLET WITH 5.00" PIPING

RIGHT SIDE HOSE TRAY FOR 20' OF 6.00" HOSE WITH ROUND ALUMINUM ROD TRIM

(3) WHELEN M6 WARNING LIGHTS EACH SIDE

GTT 794 OPTICOM TRAFFIC LIGHT CONTROLLER

WHELEN DOMINATOR DP880000 L.E.D. WARNING LIGHT

2.50" OUTLET WITH 2.50" PIPING

FEDERAL Q2B SIREN

WHELEN SA315 SPEAKER WITH GRILLE

(2) HADLEY AIR HORNS

CENTER HOSE TRAY FOR 150' OF 1.75" HOSE WITH ROUND ALUMINUM ROD TRIM

HOSEBED CAPACITIES

① 400' OF 1.75" D.J. POLY HOSE

② 500' OF 2.50" D.J. POLY HOSE

③ 600' OF 3.00" D.J. POLY HOSE

④ 1000' OF 5.00" D.J. POLY HOSE

(6) WHELEN M4 LIGHTS FOR TRAFFIC DIRECTING

(2) WHELEN L31 BEACON LIGHTS

(3) 0.25" HOSE BED DIVIDERS WITH HAND HOLD CUTOUT

(2) WHELEN M6 WARNING LIGHTS

(2) WHELEN MP SCENE LIGHTS

SAFETY VISION 620 BACK UP CAMERA

CUP SWITCH FOR HOSE BED LIGHTS

CUP SWITCH FOR REAR SCENE LIGHTS

(2) 2.50" OUTLETS WITH 2.50" PIPING

(2) WHELEN M6 WARNING LIGHTS

(2) WHELEN M6 STOP/TAIL LIGHTS

(2) WHELEN M6 DIRECTIONAL LIGHTS

(2) WHELEN M6 BACKUP LIGHTS

ALL LIGHTS MOUNTED IN WHELEN M6 "PIERCE" BEZEL

(2) WHELEN GRB WARNING LIGHTS

MARKER LIGHT WITH RUBBER ARM EACH SIDE

14.00

28.00

40.00

28.00

96.00

14.00

36.00

30.75

42.00

31.50

1.75

4.00

72.00

14.00

34.00

12.00

14.50

7.50

68.00

48.00

38.00

5'-7"

LADDER BRACKETS TO CONTAIN THE FOLLOWING EQUIPMENT:

(1) 24" DUO-SAFETY 2-SECT 900-A

(1) 14" DUO-SAFETY ROOF 775-A

(1) 10" DUO-SAFETY FOLDING 585-A

(1) 10" FIRE HOOKS PIKE POLE

(1) 6" FIRE HOOKS PIKE POLE

(2) PIKE POLE TUBES



MANUFACTURING INC.

JOB NO.	41712
SCALE	1:24
DATE	
DRAWN BY	BST
020CT25	
CHECKED BY	CLM
20CT25	
SHEET SIZE	D
SHEET NO.	1 OF 2

TITLE Pierce Pumper Approval Drawing

FOR County Of Henrico

DWG NO. 41712AD-SH1

				CHASSIS DATA
				MAKE
				PIERCE
				MODEL
				ENFORCER
20NOV25	LST	CLM		
REV	DATE	BY	CH	