

PUMPER

BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

Arrow XT Chassis

ELECTRICAL SYSTEM

Hard Wired

CHASSIS

AXLE, FRONT, CUSTOM

21,500 Lb Meritor Axle

AXLE, REAR

31,000 Lb Meritor Axle

ENGINE

510 HP Paccar MX13 Engine

TRANSMISSION

Allison 6th Gen, 4500 EVS P

BUMPER

16" Extended Stainless Steel

CAB

6710 Arrow Cab

BODY

TOTAL TANK CAPACITY

750 Gallon Poly Tank

WATER CAPACITY

750 Gallons of Water

FOAM CELL CAPACITY

Foam Cell Not Required

COMPT, PUMPER, REAR

44.50" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

161" RollUp Full Height & Depth Front & Rear

COMPT, PUMPER, RIGHT SIDE

161" RollUp Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Hale QTWO

CROSSLAYS, 1.50"

1.50" CrossLay Not Required

CROSSLAYS, 2.50"

2.50" CrossLay Not Required

SPEEDLAYS

(2) 1.50" Standard Capacity

GENERATOR

Generator Not Required

FOAM SYSTEM

Foam System Not Required

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED

2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB

3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL

4. BATTERY CHARGER LOCATED PER ORDER

5. BATTERY CHARGE INDICATOR LOCATED THROUGH DRIVER SIDE CAB WINDOW

6. DEF TANK MOUNTED UNDER CAB ON THE DRIVER'S SIDE

7. L.E.D. LIGHT STRIP LOCATED ON THE FRONT OF THE HOSEBED

8. AMDOR WALKING SURFACE L.E.D. LIGHTS LOCATED PER ORDER

9. TEN FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER ORDER

10. THREE ADJUSTABLE SLIDE-OUT TRAYS LOCATED PER ORDER

11. ONE ADJUSTABLE TILTING SLIDE-OUT TRAY LOCATED PER ORDER

12. THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER





13. ONE SLIDE-OUT TOOLBOARD LOCATED PER ORDER

14. ONE VERTICAL PARTITION LOCATED PER ORDER


15. ONE 15/20A 120V RECEPTACLE LOCATED PER ORDER

16. TWO ADDITIONAL POLY TRAYS SHIPPED LOOSE

17. HANNAY EF-34-23-24 1/2 HP ELECTRIC REWIND BOOSTER REEL WITH A CAPACITY FOR 200' OF 0.75" HOSE LOCATED IN COMPARTMENT B1

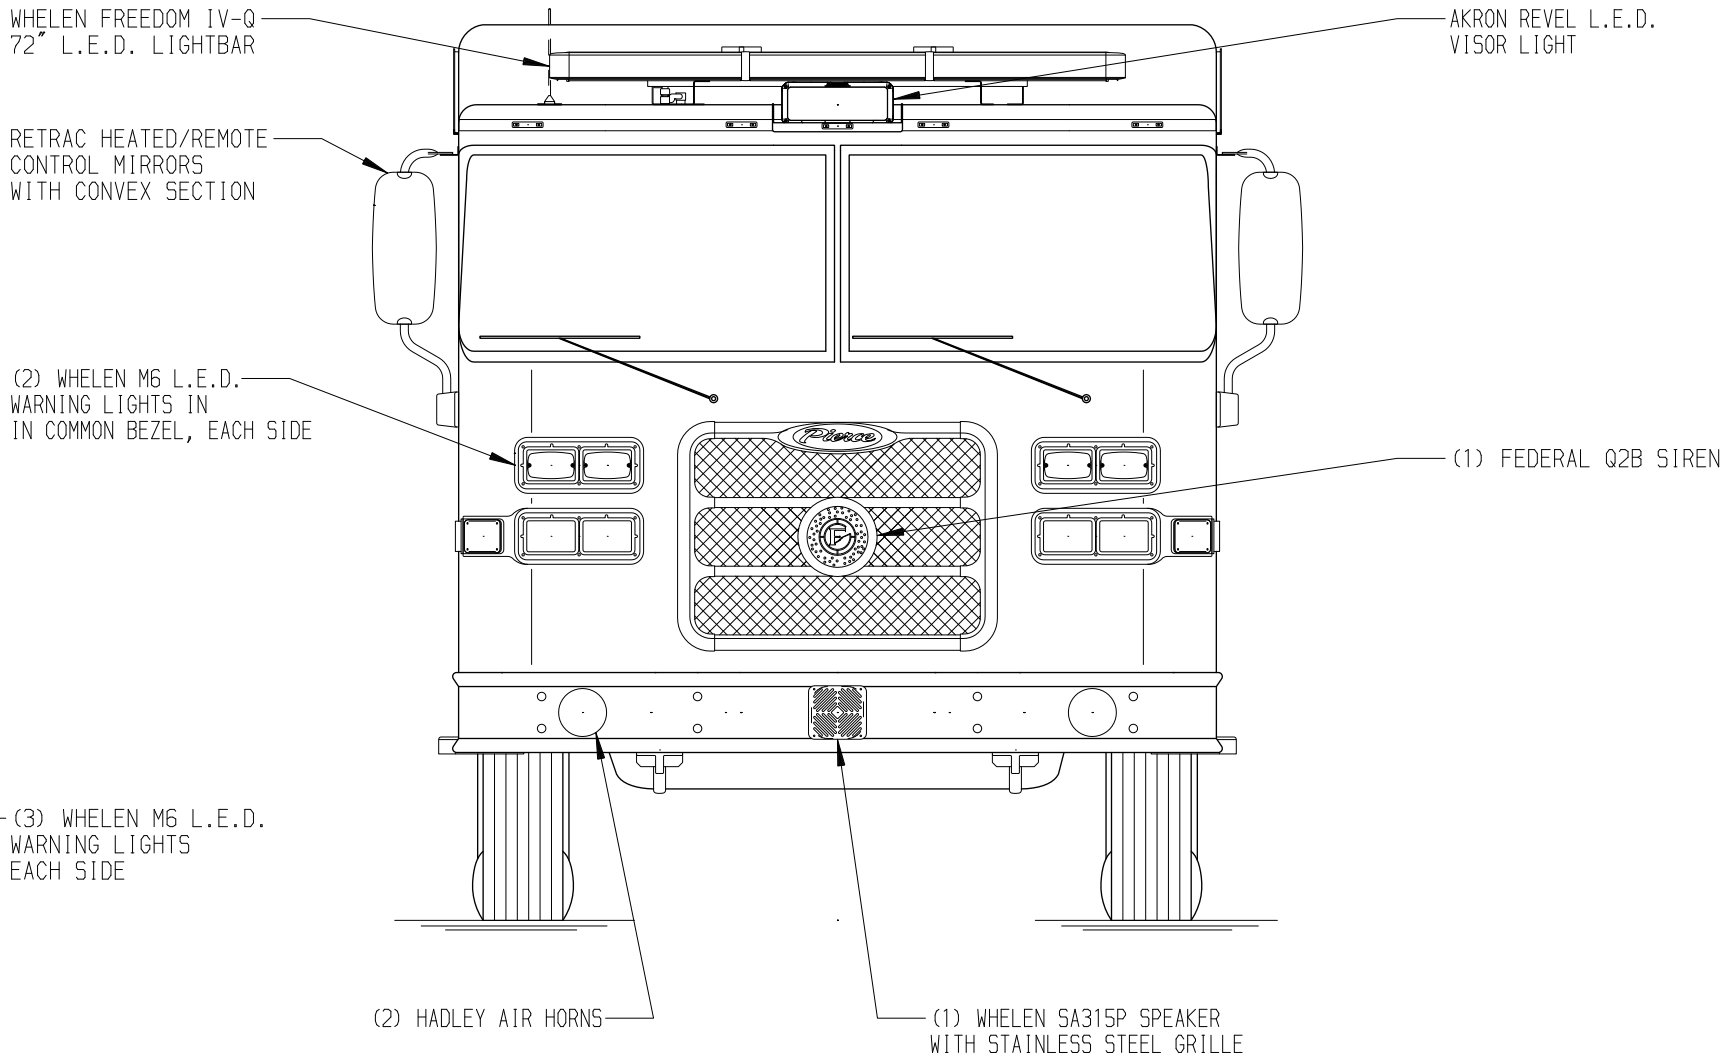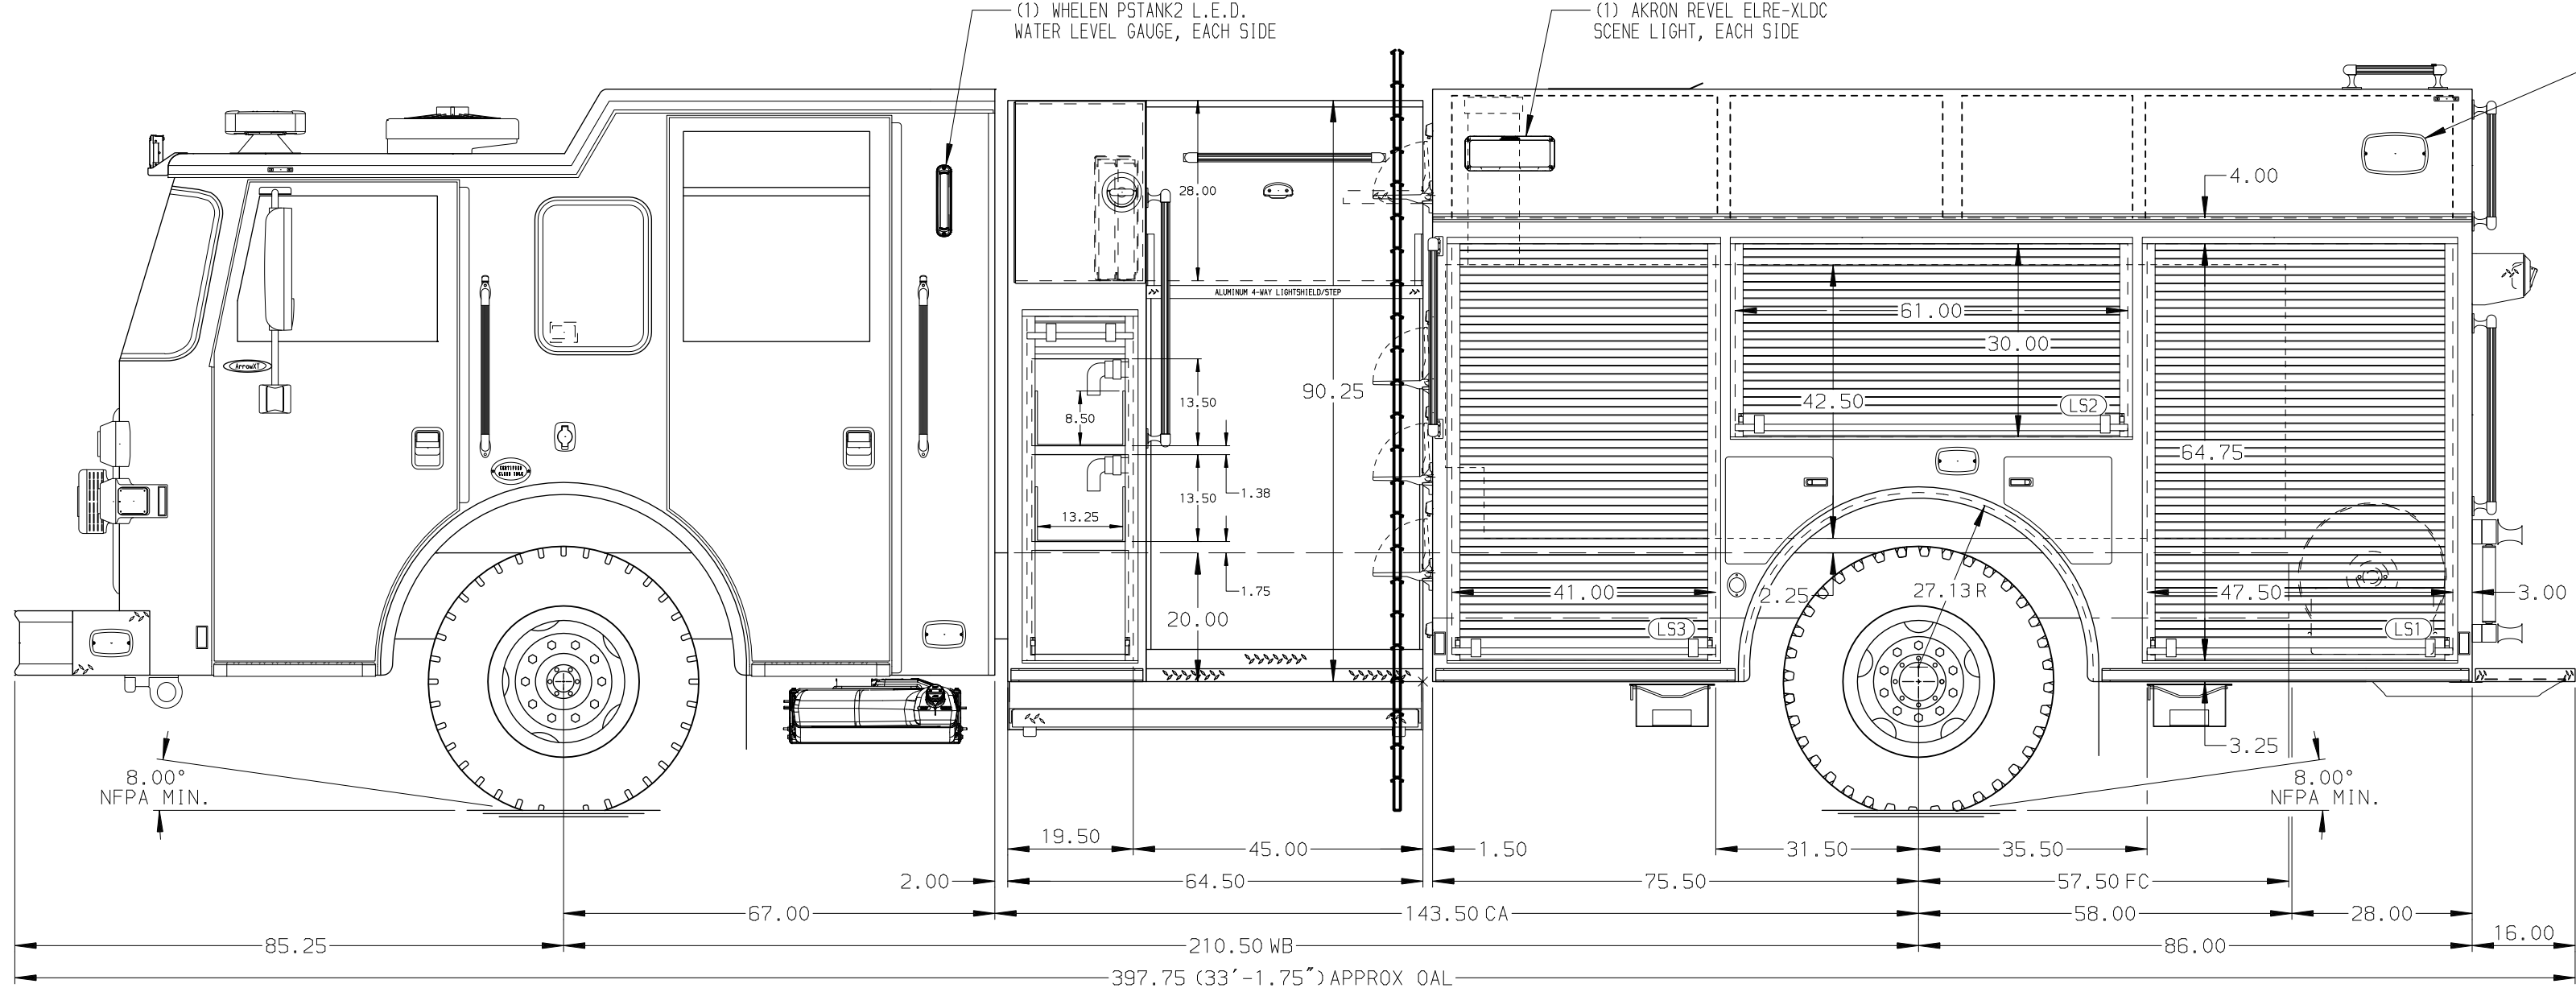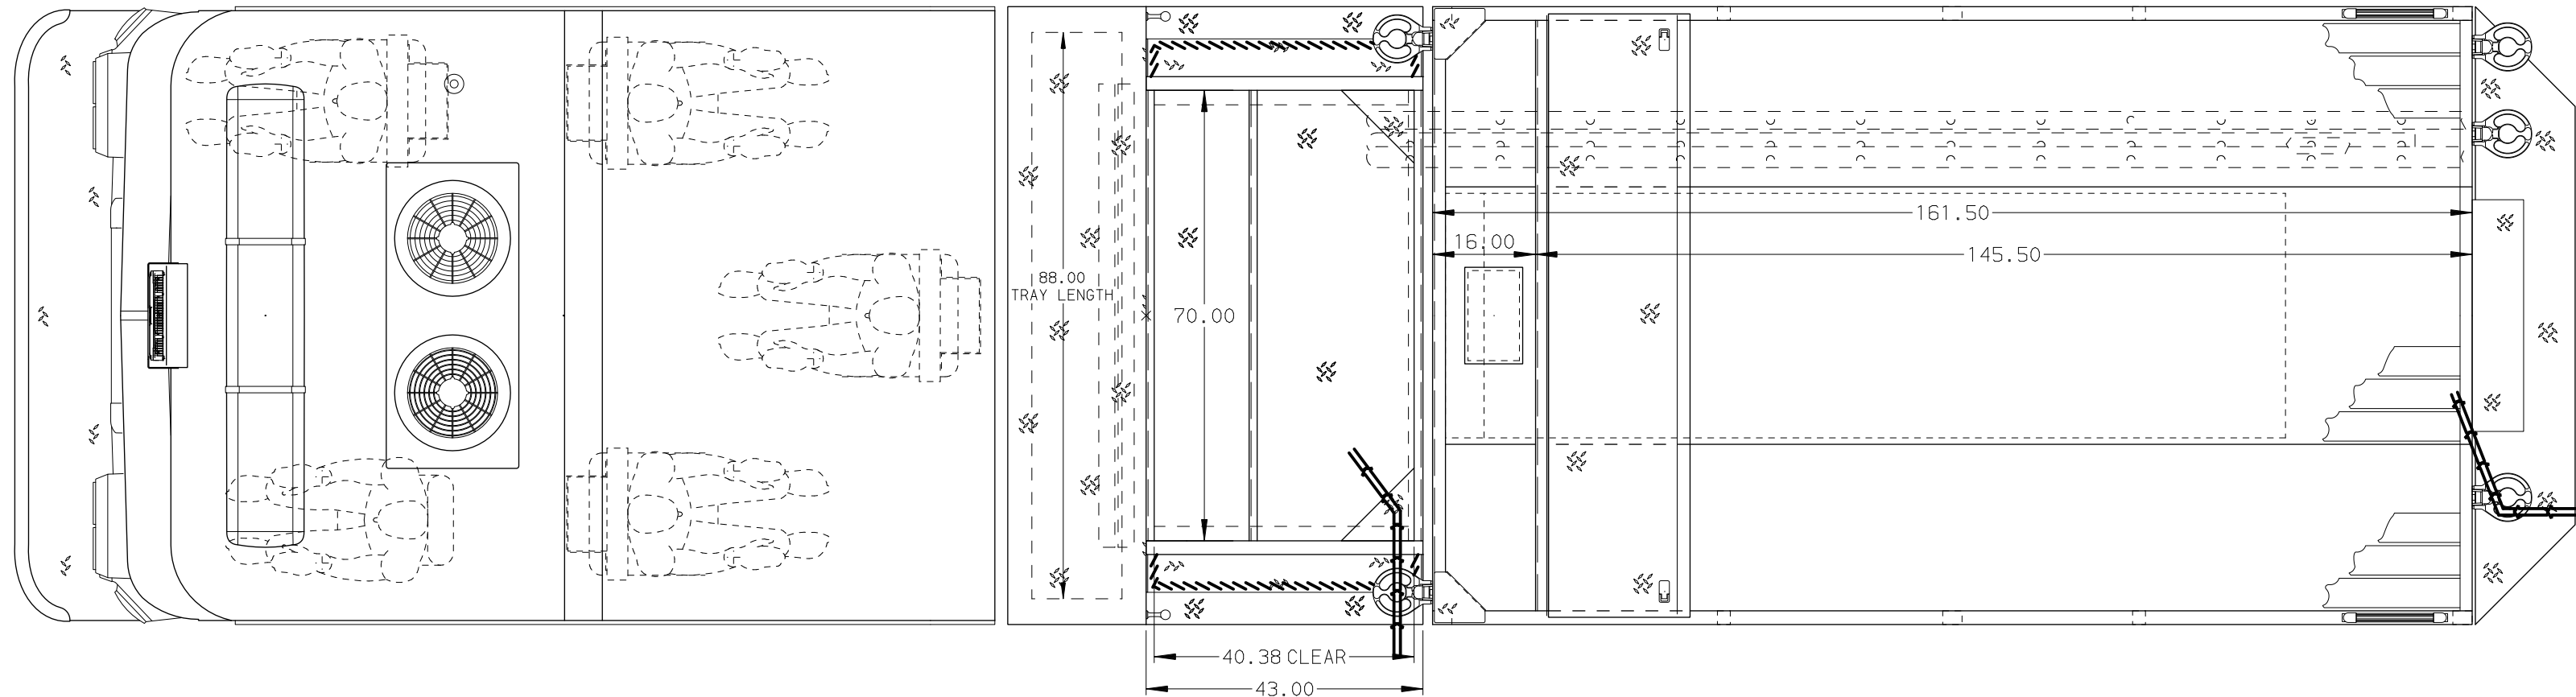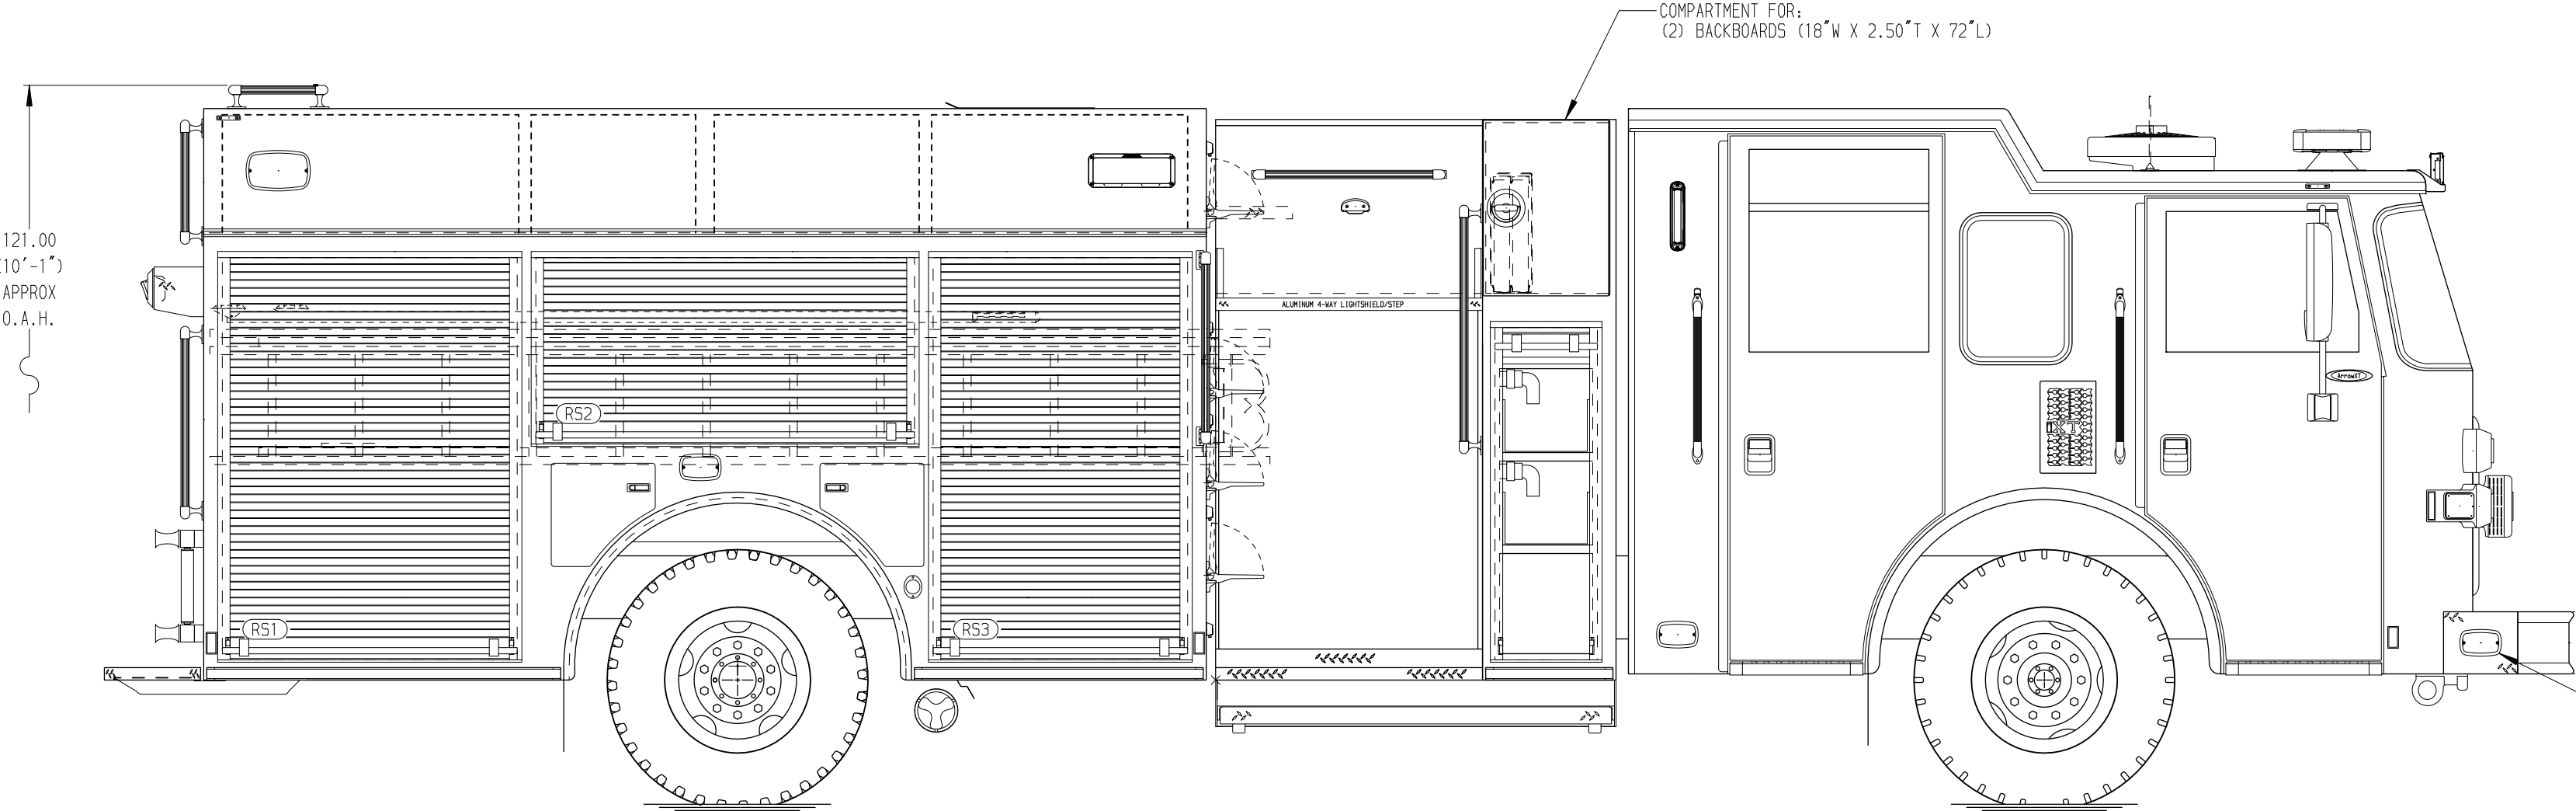

- HOSEBED CAPACITIES
- ① 500' OF 2.50" D.J. POLY HOSE
  - ② 2000' OF 5.00" D.J. POLY HOSE
  - ③ 200' OF 2.50" D.J. POLY HOSE

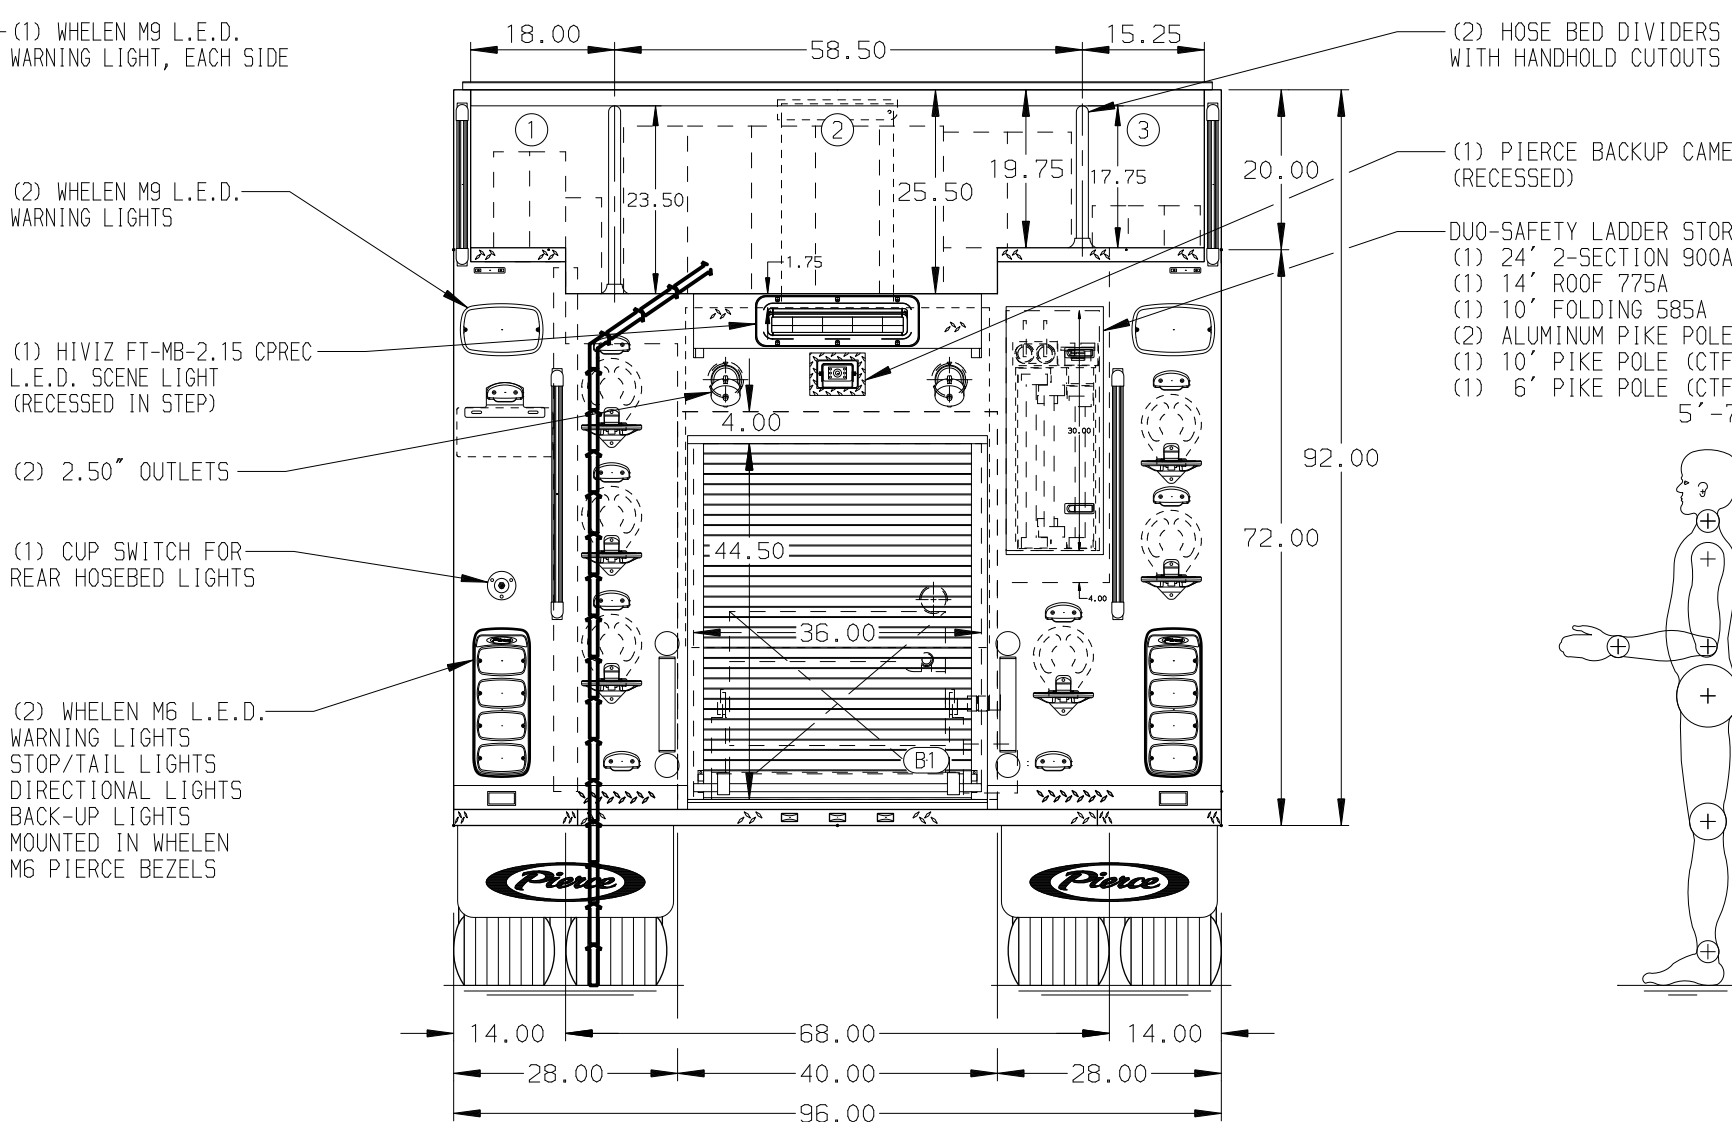

|         |                          |            |        |
|---------|--------------------------|------------|--------|
| TITLE   | Pumper Approval Drawing  | JOB NO.    | 41974  |
| FOR     | Hueytown Fire Department | SCALE      | 1:24   |
| DWG NO. | 41794AD                  | DRAWN BY   | JDA    |
|         |                          | CHECKED BY | MMF    |
|         |                          | SHEET SIZE | D      |
|         |                          | SHEET NO.  | 1 OF 1 |