

Medium Aluminum 2nd Gen Pumper
CHASSIS
Enforcer Chassis
ELECTRICAL SYSTEM
MUX

AXLE, REAR
27,000 lb Dana Axle

605 HP Cummins X15 Engine

ALLison 6th Gen, 4000 EVS P

19" Extended Polished Stainless Steel

7010 Enforcer Cab

37.75" FF Rollup Rear Compt

152" Rollup Full Height Front & Rear FDLER

152" Rollup Low FDLER

1750 GPM Waterous CSU

(2) 1.50" Standard Capacity

2.50" Crosslay Not Required

Speedlays Not Required





Generator Not Required

Foam System Not Required

Foam Cell Not Required


DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED TOP LEFT SIDE OF BUMPER
2. SHORELINE RECEPTACLE WITH KUSUMALL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF CAB
3. AIR INLET/ OUTLET WITH DISCONNECT COUPLING ON THE DRIVER'S SIDE PUMP PANEL
4. BATTERY CHARGER LOCATED BEHIND THE DRIVER'S SEAT
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. FOUR ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. FOUR FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
8. ONE SWING-OUT TOOLBOARD IN COMPARTMENT PER SHOP ORDER
9. HANNAY MODEL SBF6 28-25-26 BOOSTER REEL FOR 200' OF 1.00" HOSE IN THE LEFT SIDE OF THE HOSE BED

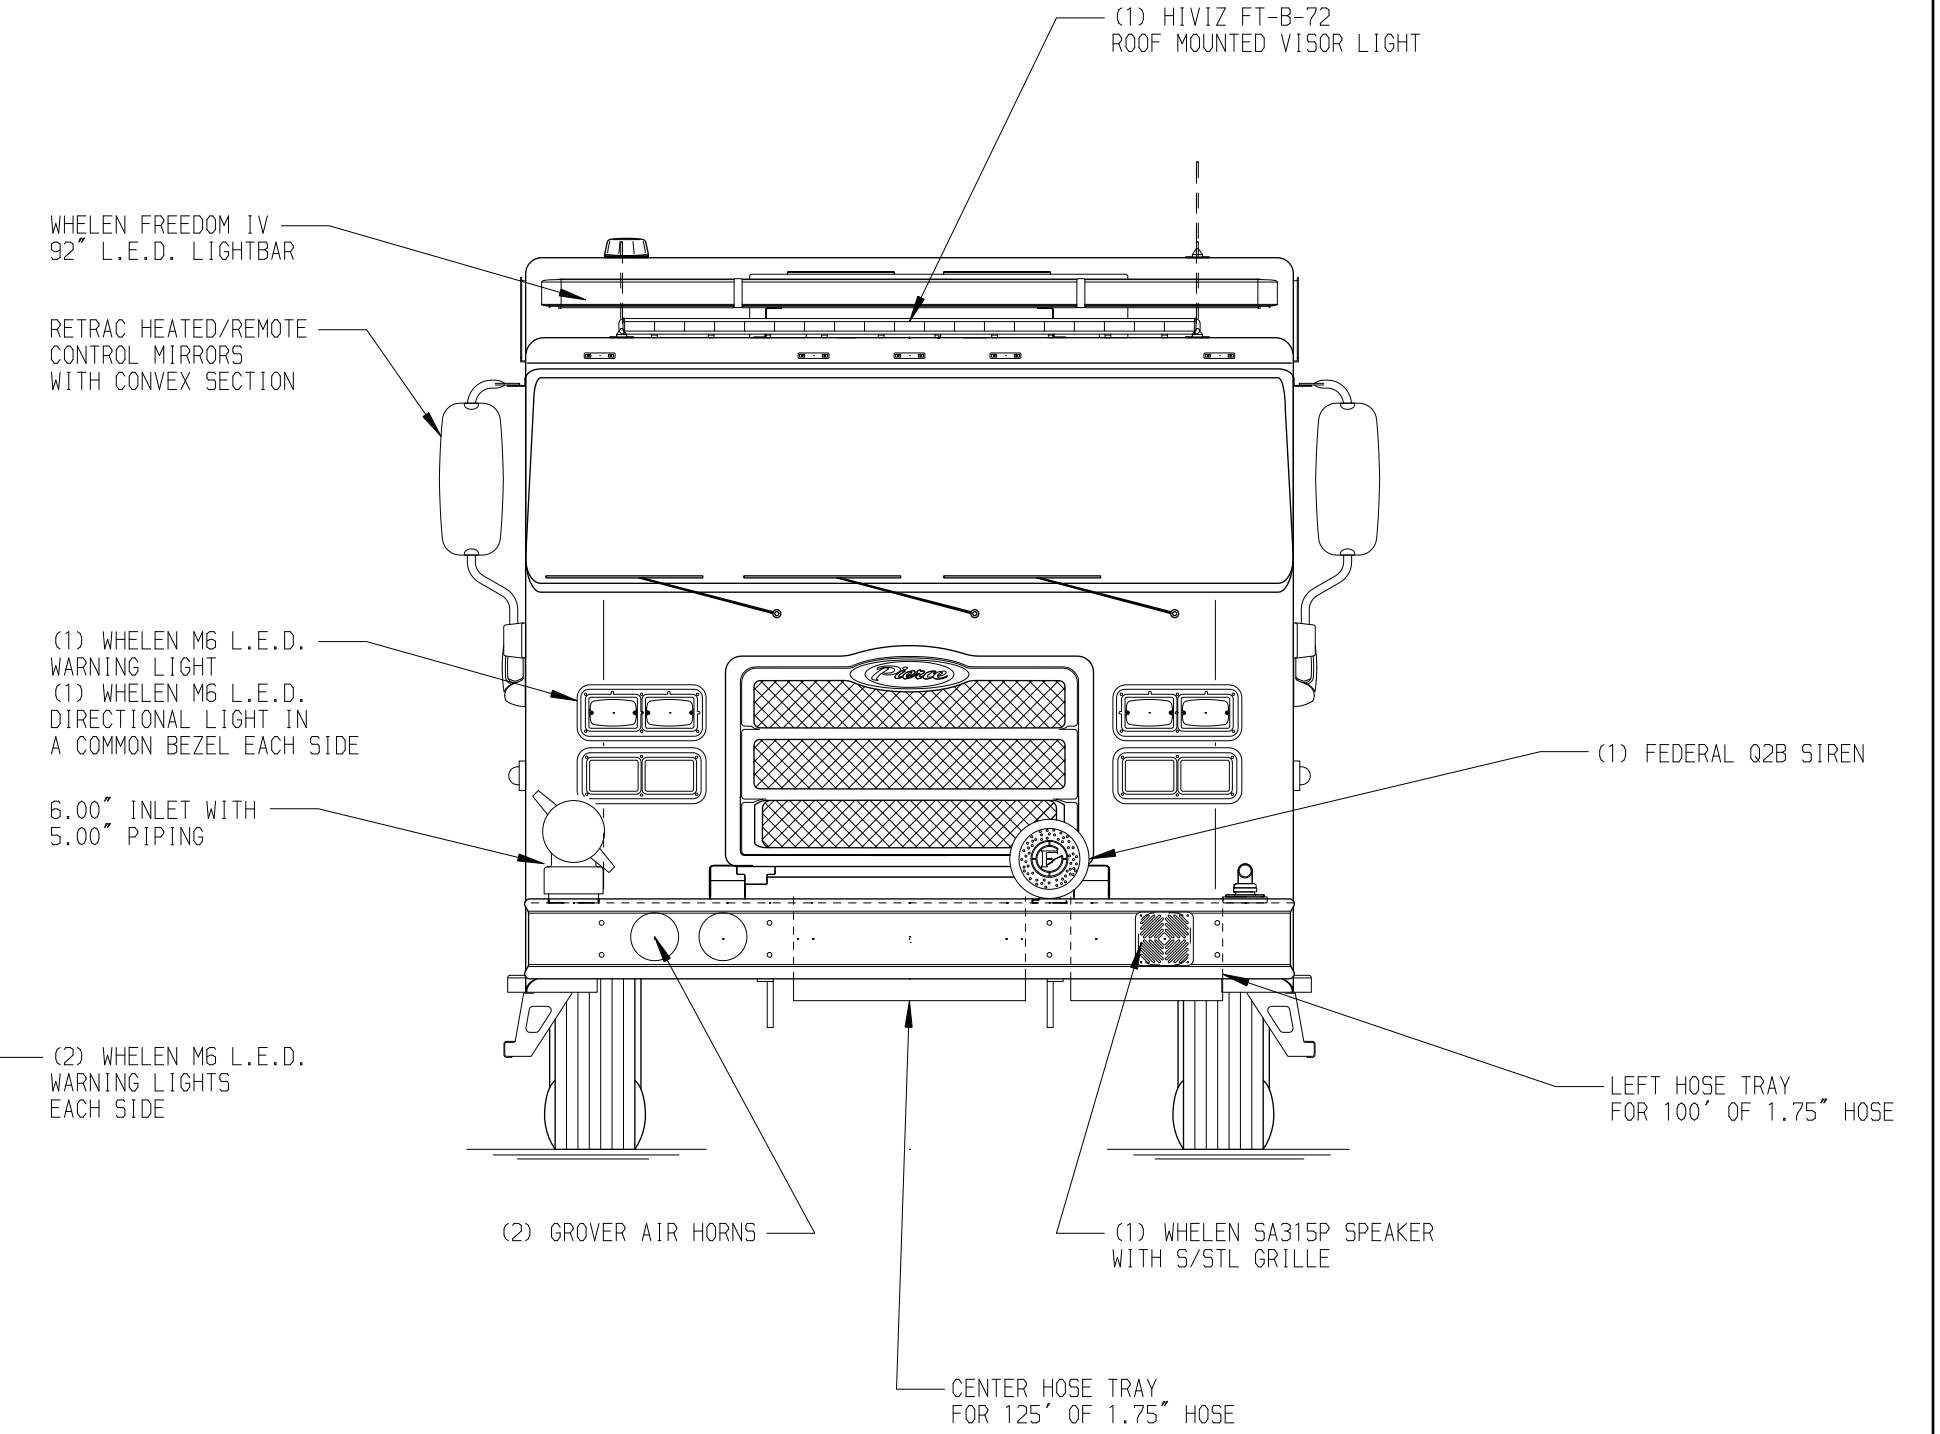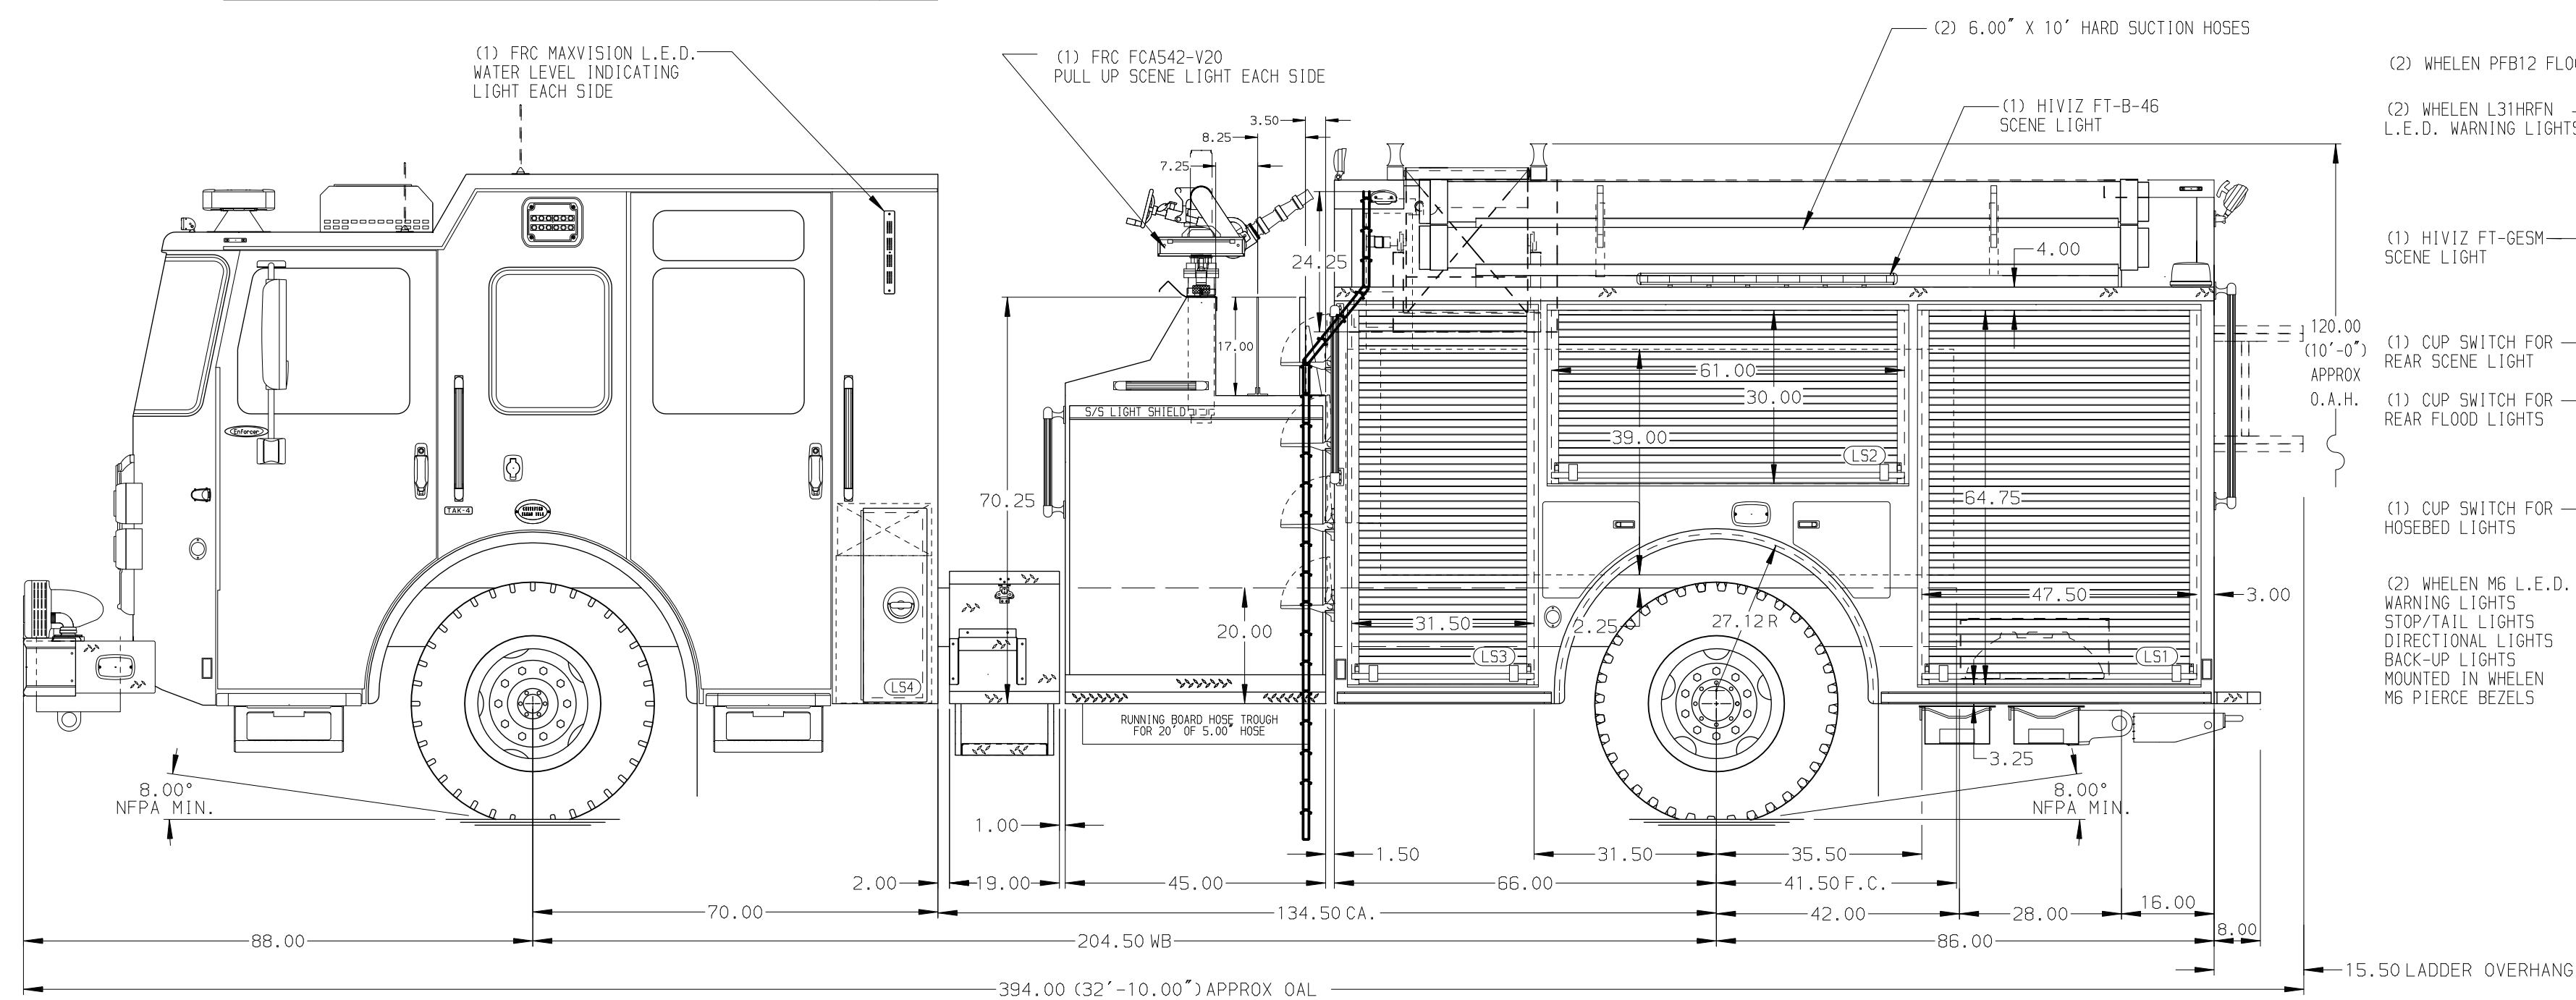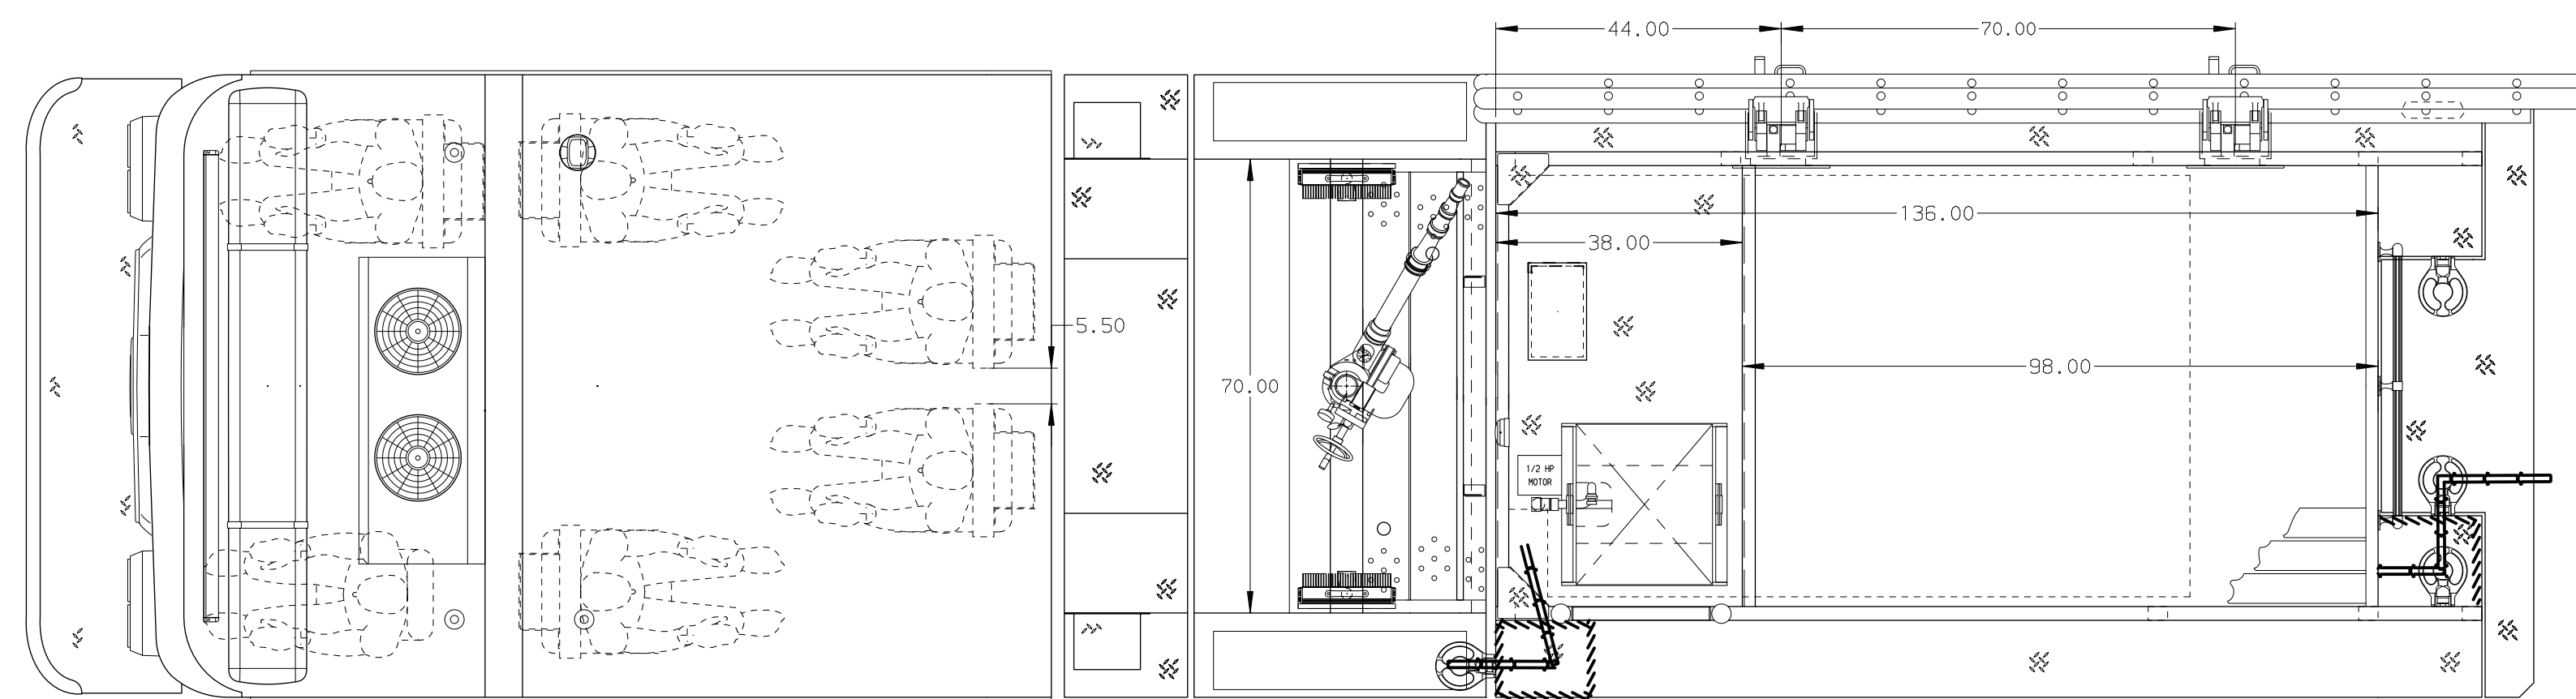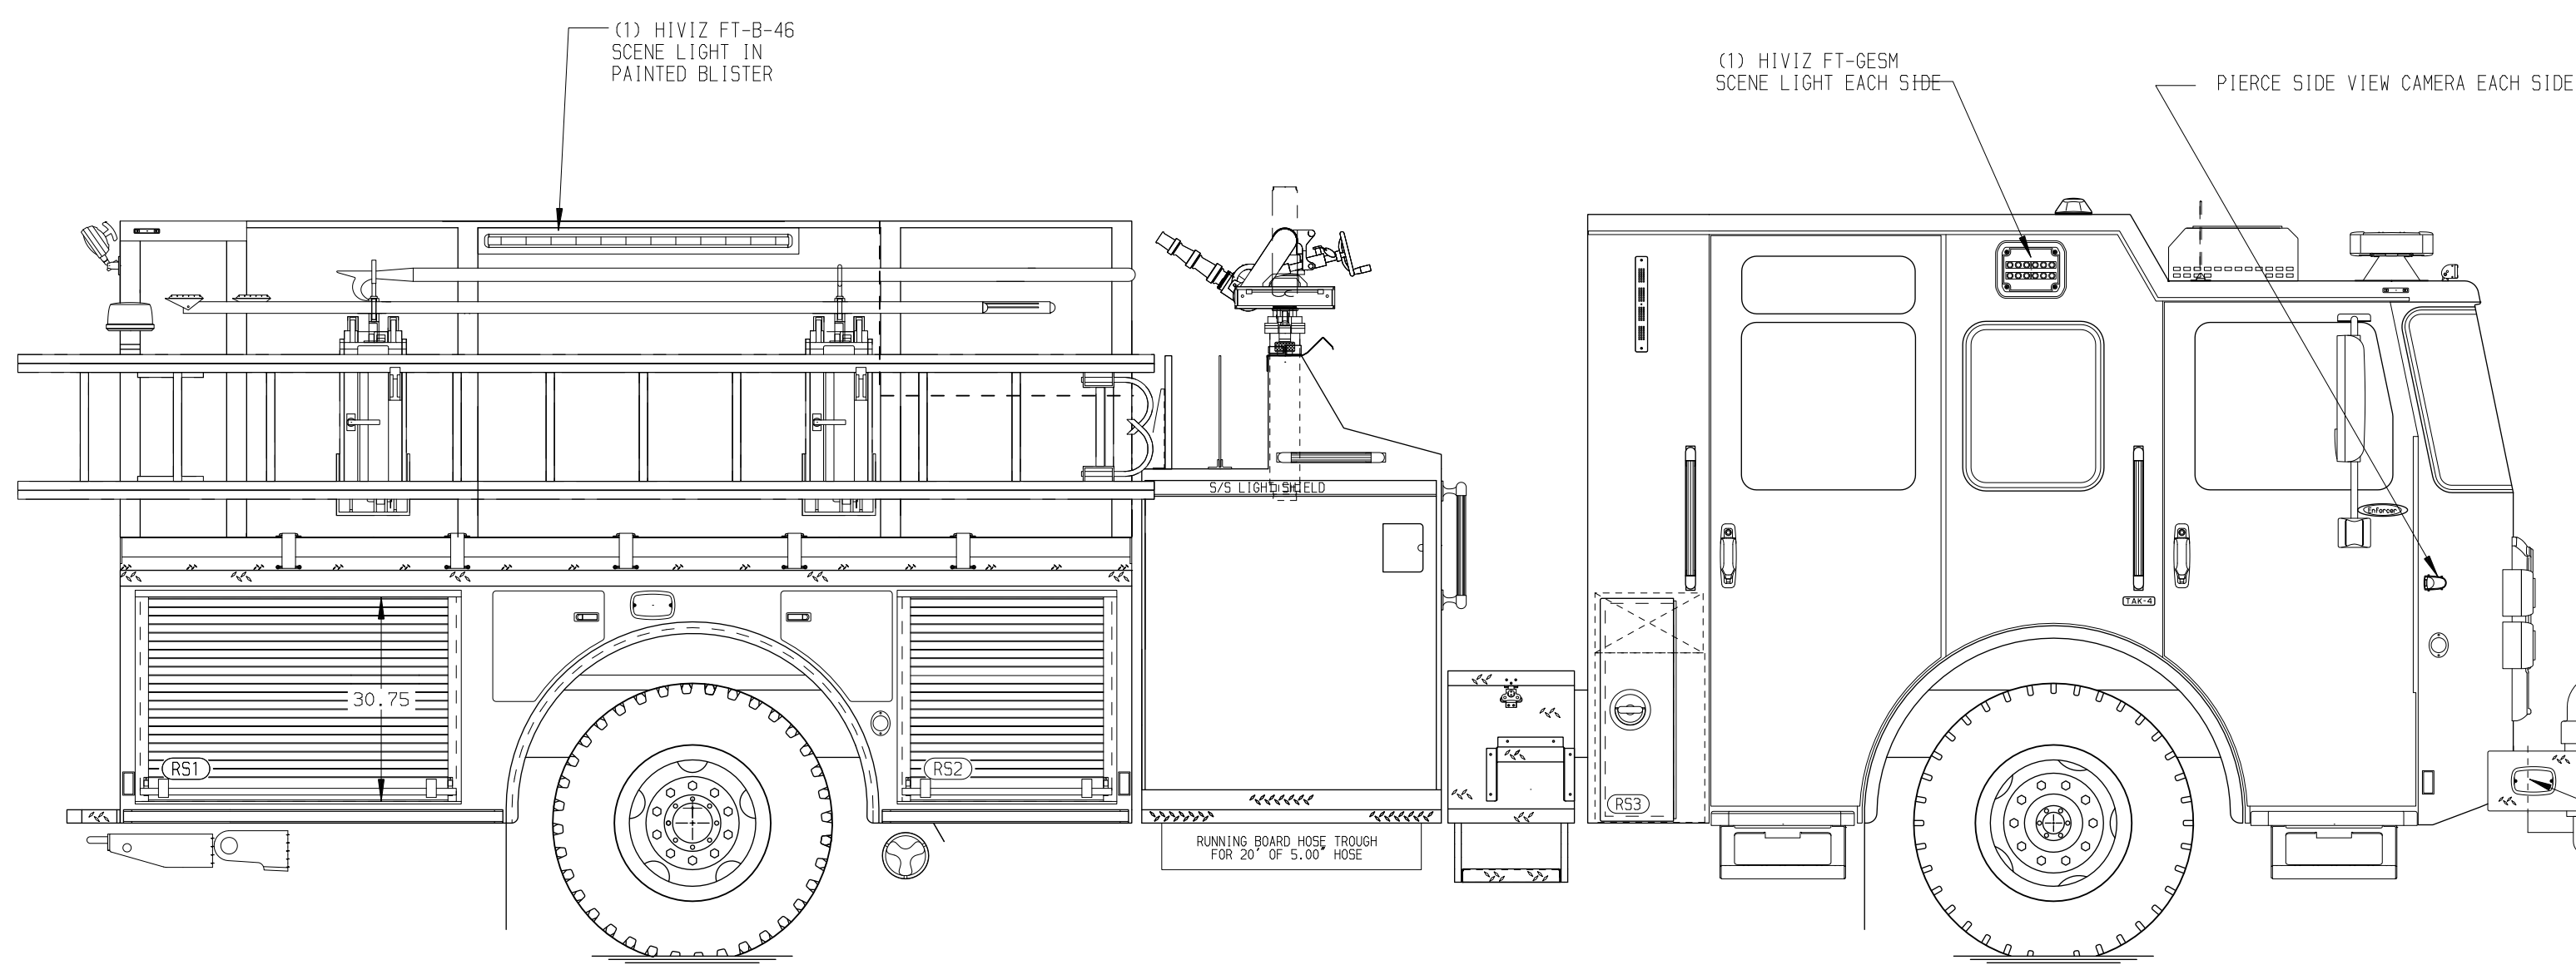

HOSEBED CAPACITIES

- ① 1200' OF 4.00" D.J. POLY HOSE
- ② 600' OF 3.00" D.J. POLY HOSE
- ③ 600' OF 2.50" D.J. POLY HOSE

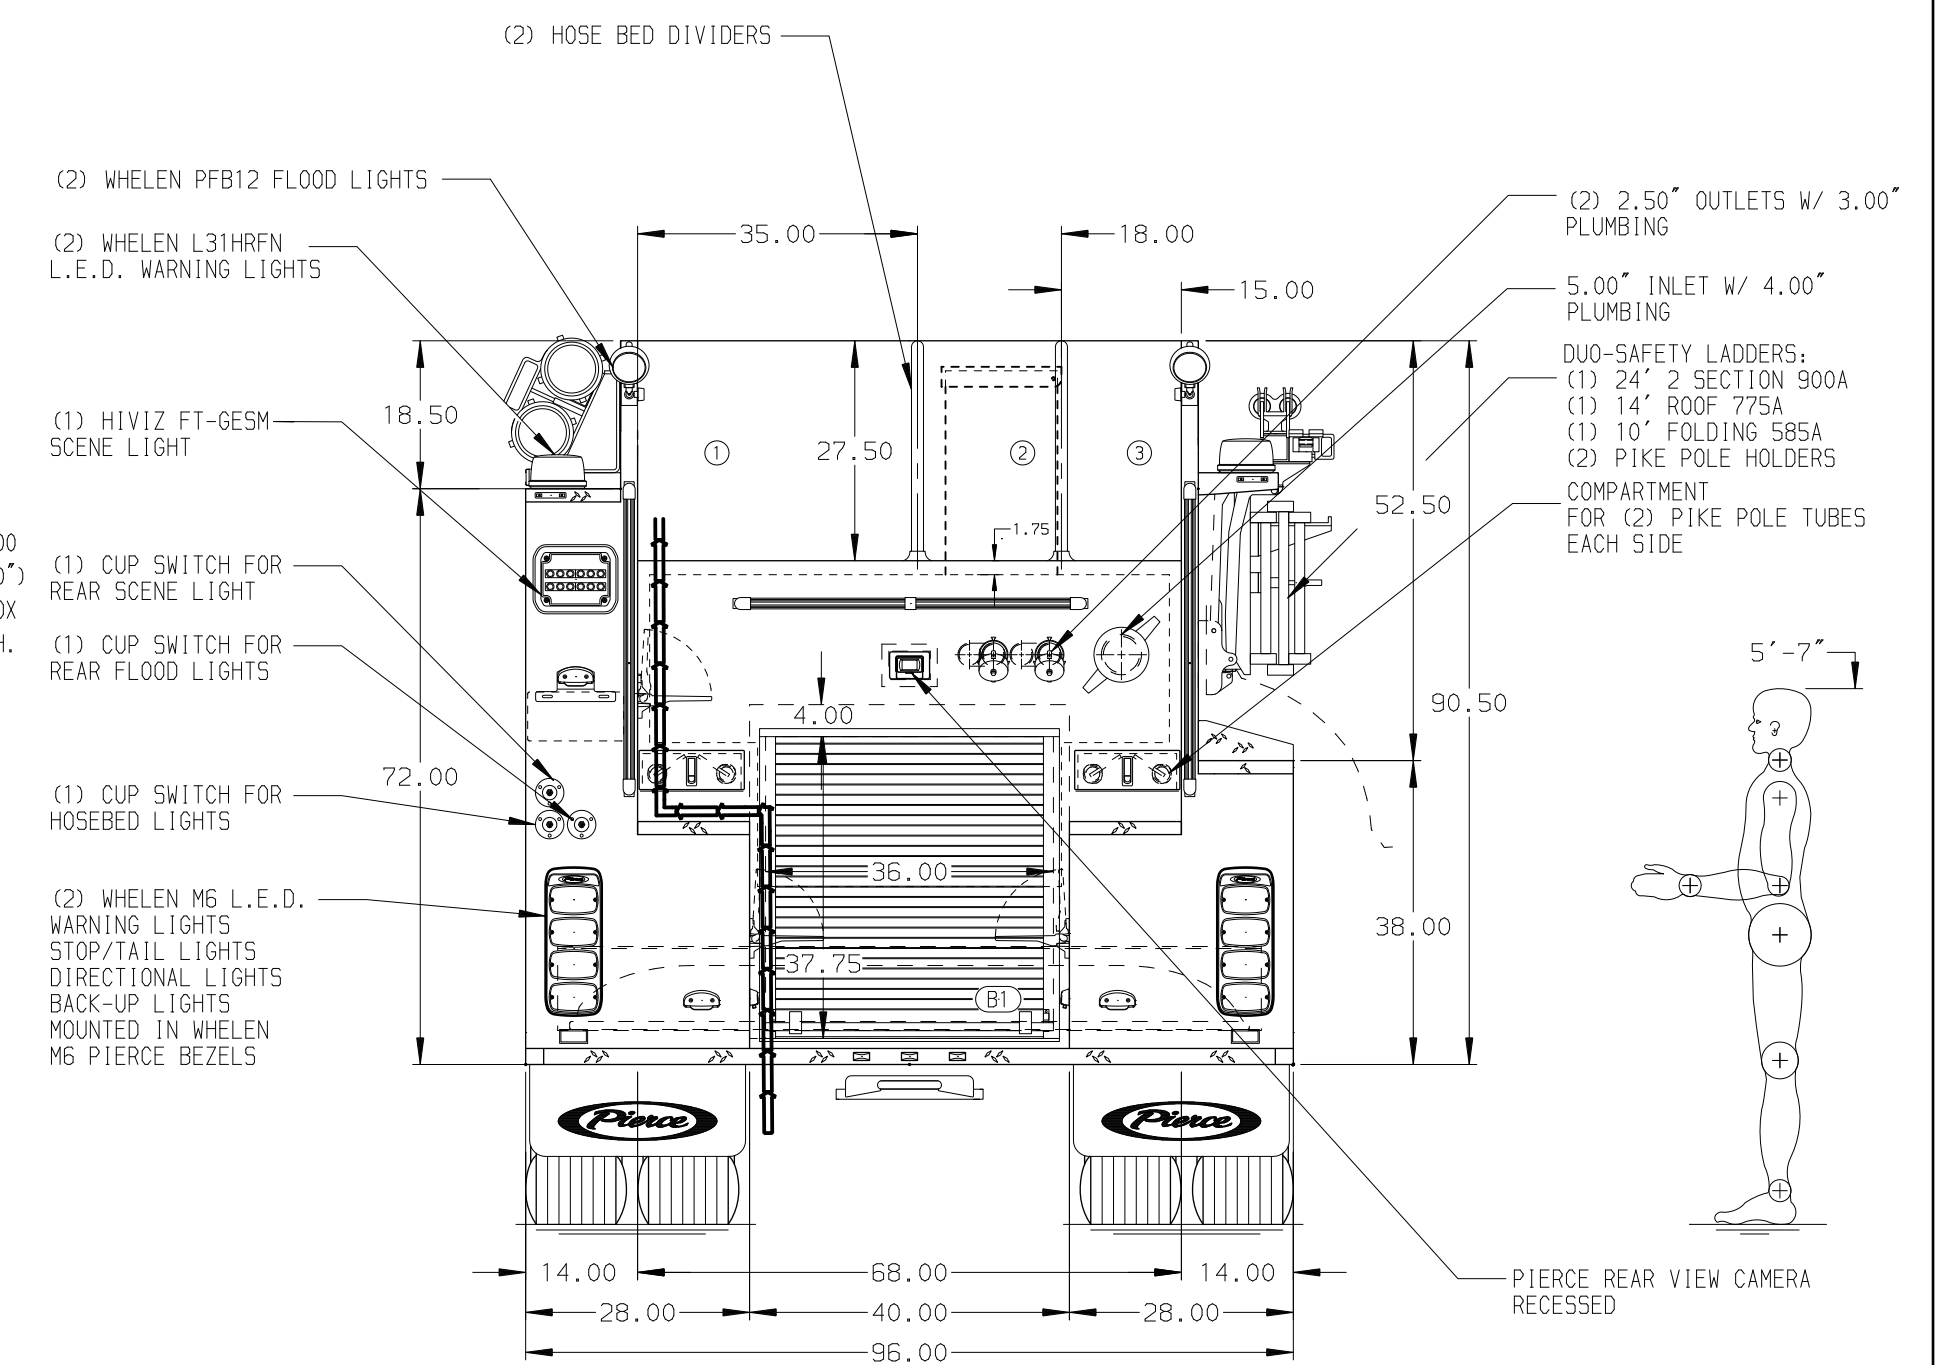

 MANUFACTURING INC.		JOB NO.	41895
		SCALE 1:24	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY LST	01DEC25
FOR	Amagansett F.D.	CHECKED BY MMF	5DEC25
DWG NO.	41895AD		SHEET NO. D 1 OF 1