


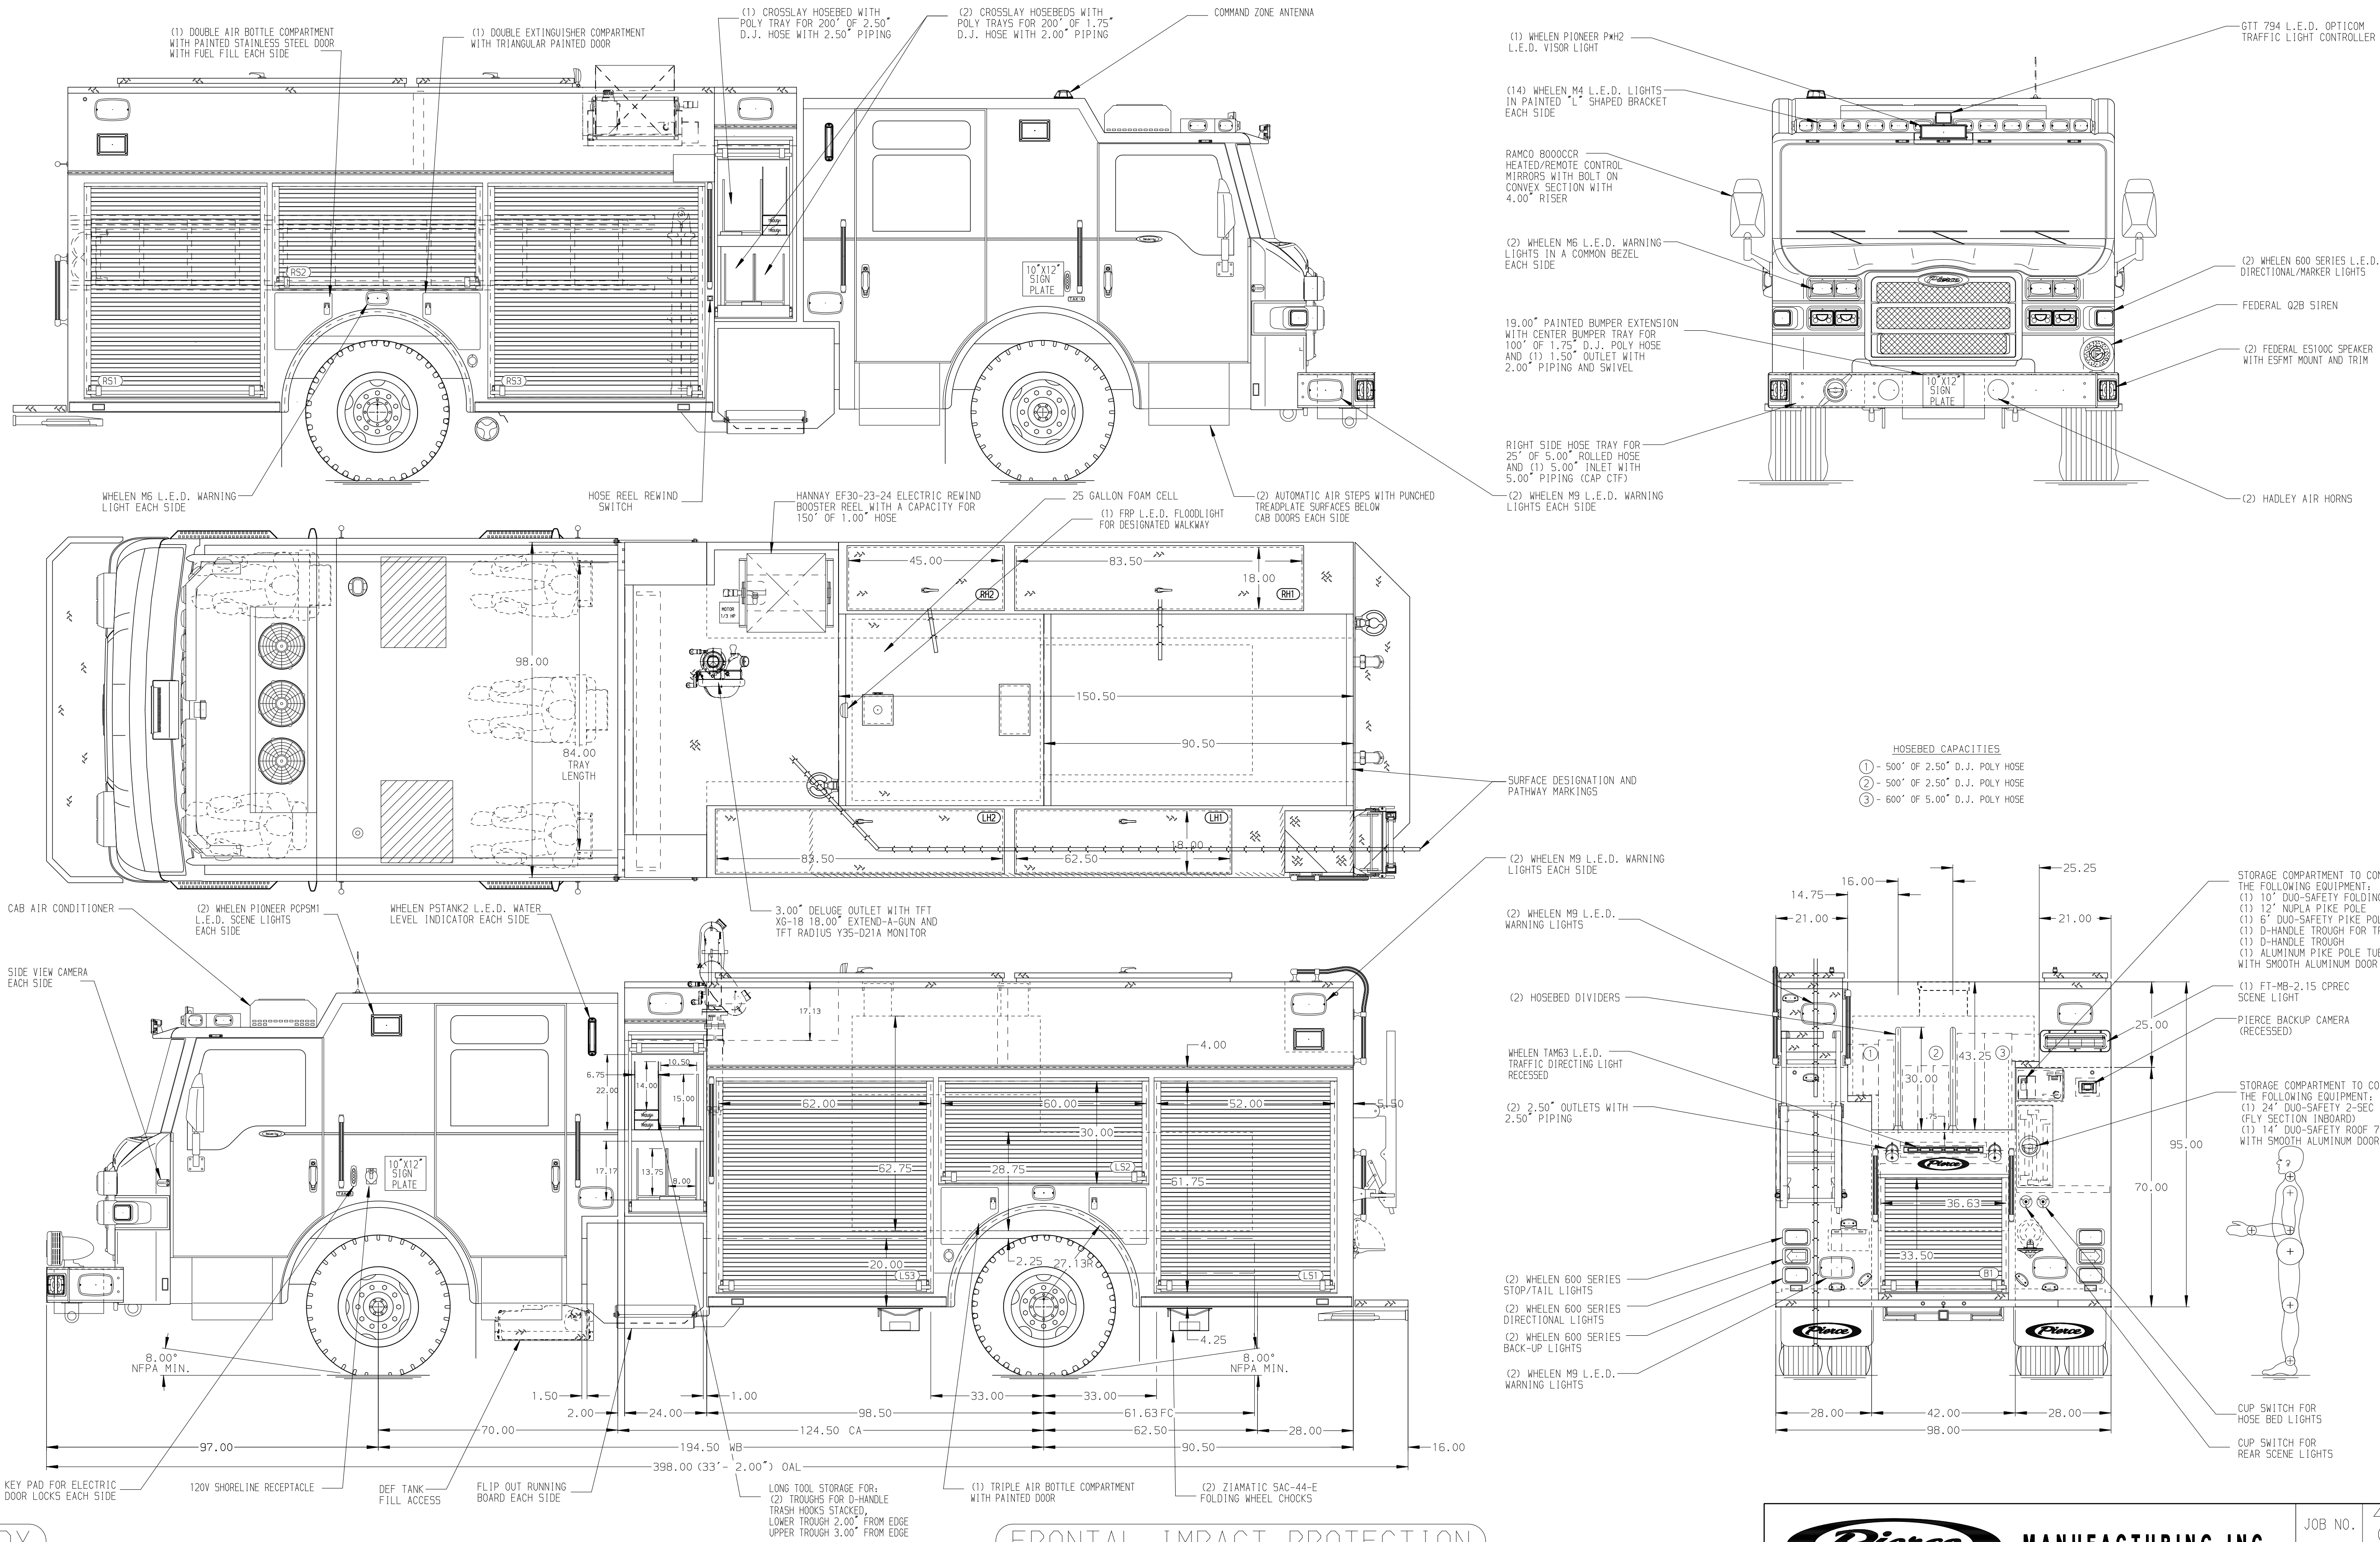

HOSEBED CAPACITIES

①	- 500' OF 2.50" D.J. POLY HOSE
②	- 500' OF 2.50" D.J. POLY HOSE
③	- 600' OF 5.00" D.J. POLY HOSE

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
- 2. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- 3. AIR INLET WITH DISCONNECT COUPLING LOCATED ON DS PUMP PANEL
- 4. JUMPER STUDS LOCATED UNDER PS CREW CAB DOOR

				CHASSIS DATA
				MAKE
05MAY25	JWR	BSE	PIERCE	MODEL
28MAR25	JWR	BSE	PIERCE	VELOCITY FR
REV	DATE	BY	CH	

 MANUFACTURING INC.		JOB NO.	42074 01-03	
		SCALE 1 : 24	DATE	
TITLE	1500GPM, 775G TANK, 750G WATER, 25G FOAM 189" PUC RESCUE, MUX		DRAWN BY JWR	04FED25
FOR	CLARK COUNTY LAS VEGAS, NEVADA		CHECKED BY BSE	10FEB25
DWG NO.	42074AD-SH1		SHEET SIZE D	SHEET NO. 1 OF 2