


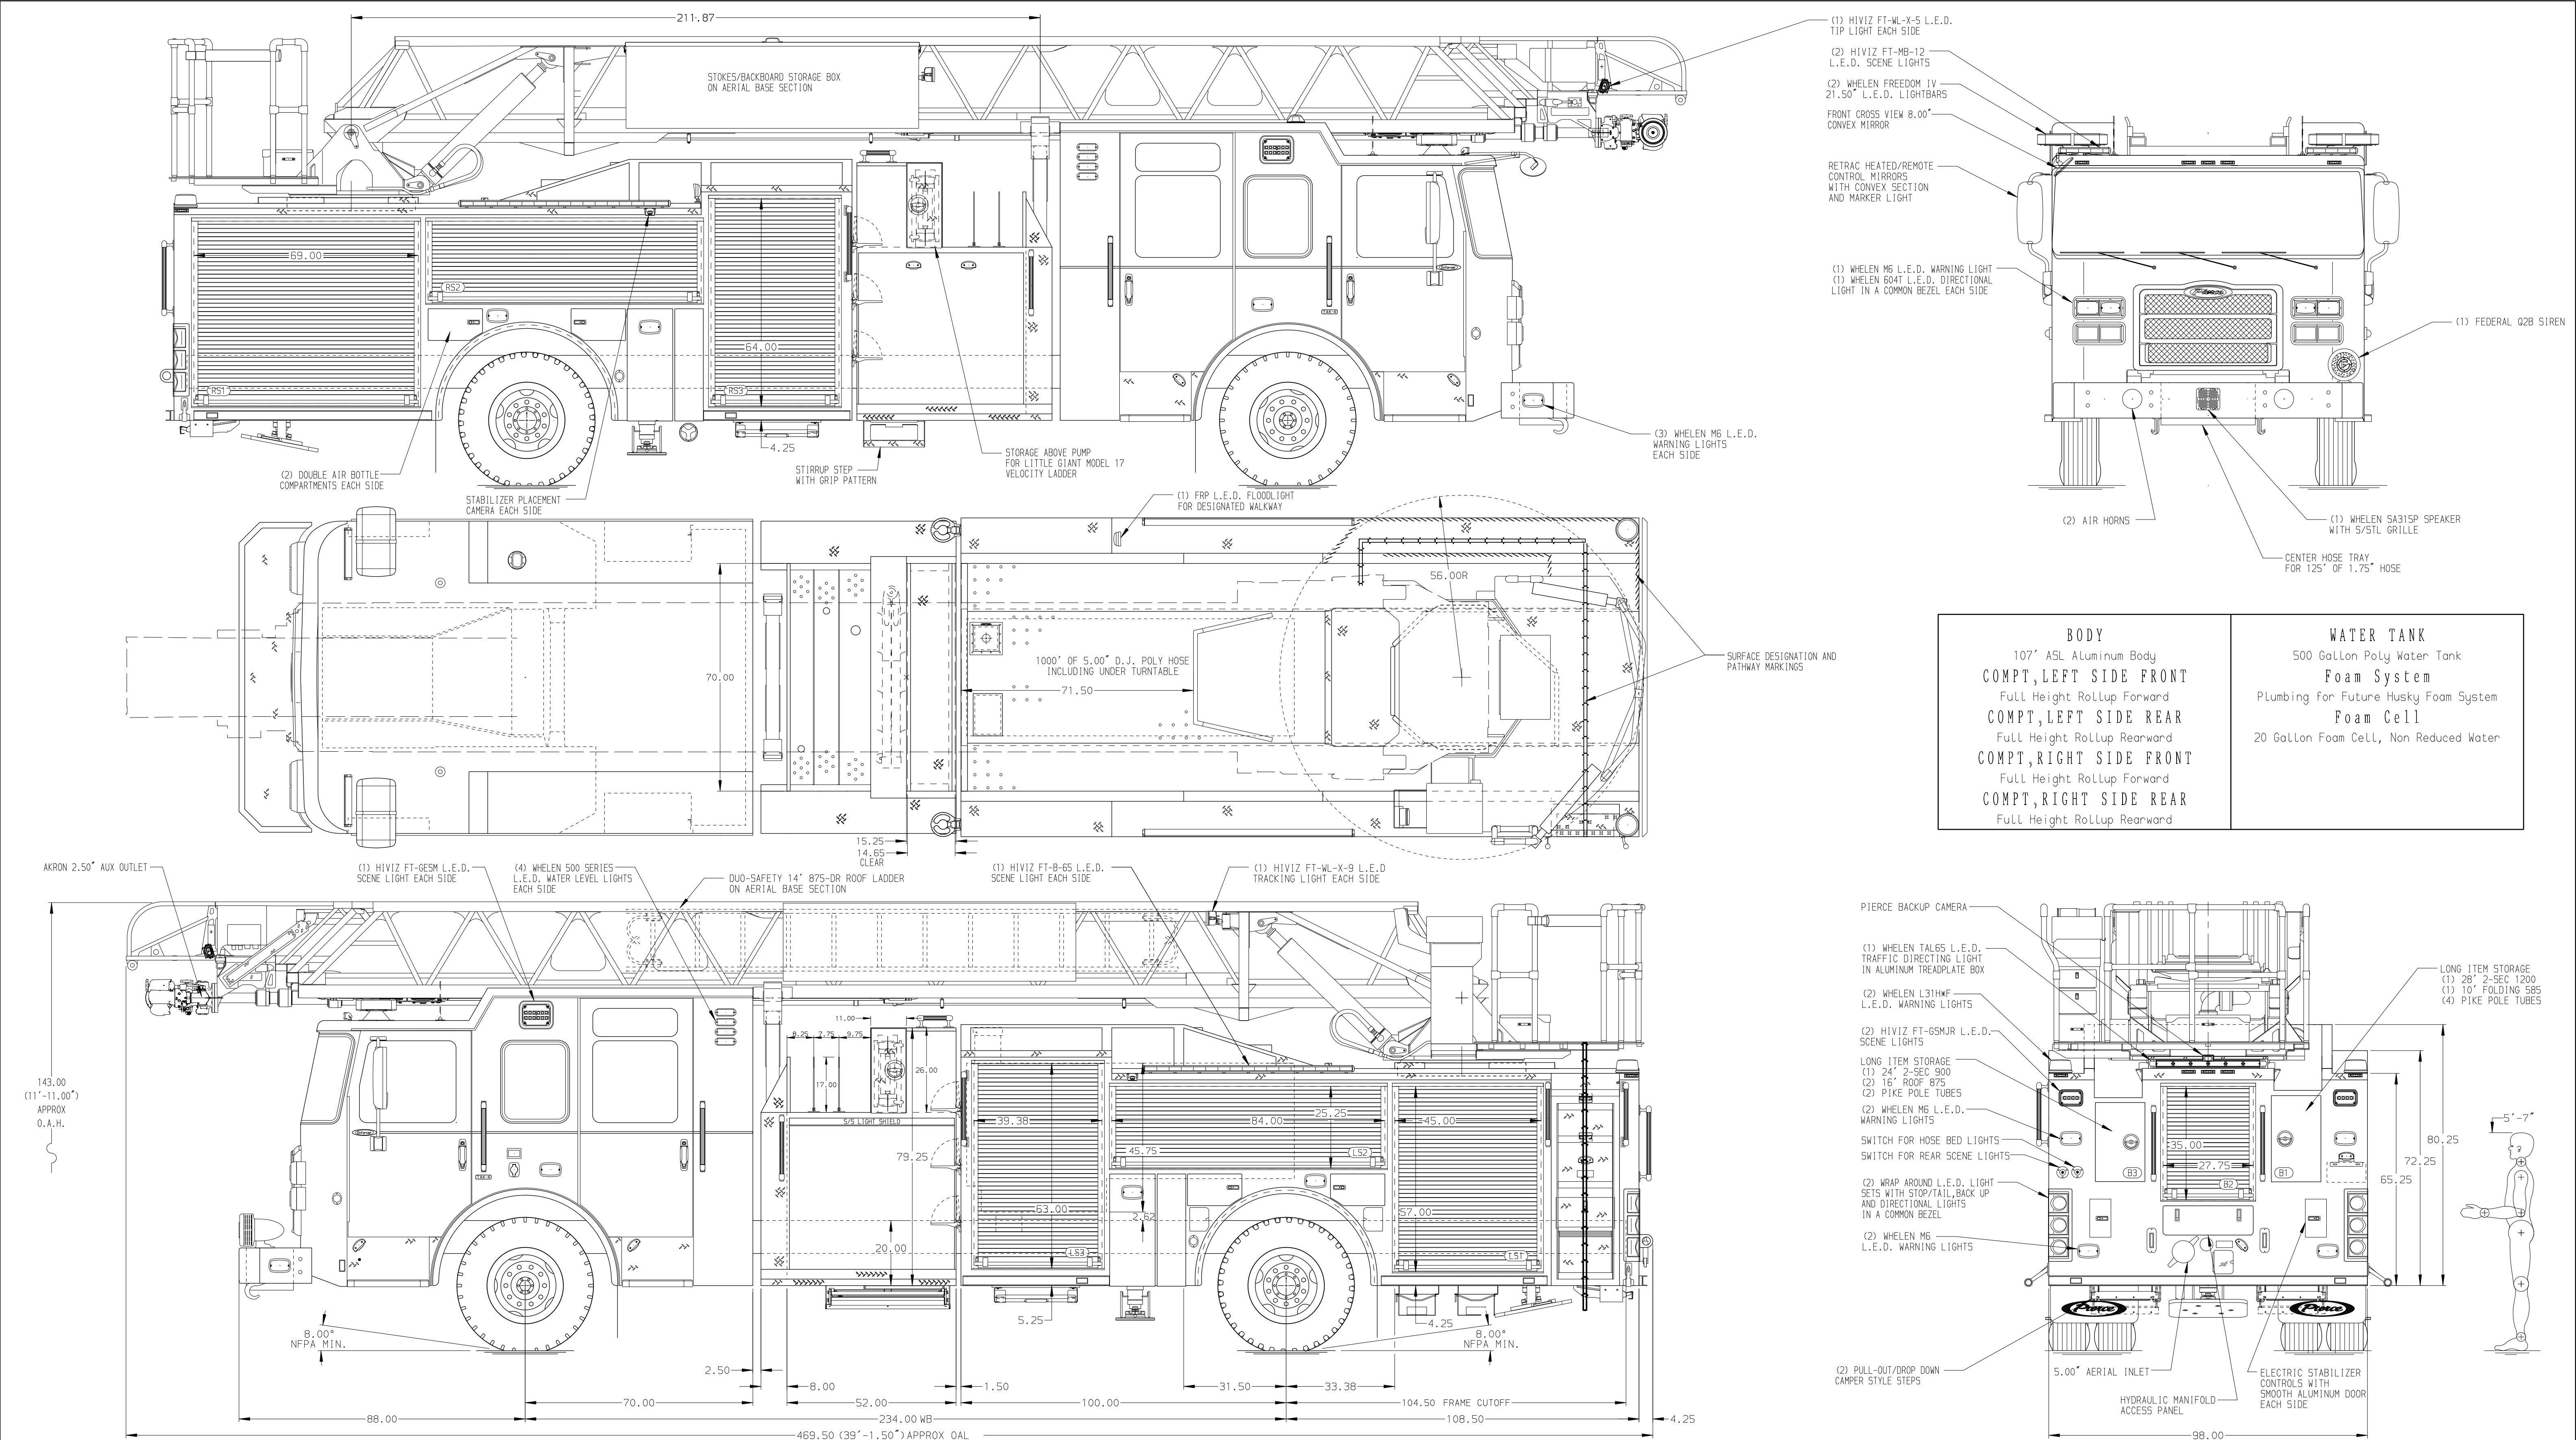

CHASSIS Enforcer Chassis ENGINE 450 HP Cummins L9 Engine		CAB 7010 Enforcer Notched Cab BUMPER 19" Extended Painted Steel	AXLE, FRONT, CUSTOM 22,800 Lb TAK-4 Axle AXLE, REAR 33,500 Lb Meritor Axle	TRANSMISSION Allison 6th Gen, 3000 EVS P	PUMPHOUSE 52" Control Zone Side Mount PUMP 2000 GPM Waterous CSU	CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" (1) 2.50" Standard Capacity	SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required	CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____		 MANUFACTURING INC.		JOB NO. SCALE 1:24	42092 DATE	
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.		1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB 2. AIR INLET WITH DISCONNECT COUPLING LOCATED FORWARD IN THE DRIVER SIDE STEPWELL 3. BATTERY CHARGER LOCATED BEHIND DRIVERS SEAT 4. BATTERY CHARGE INDICATOR LOCATED ON DRIVERS SIDE OF CAB 5. ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY 6. SEVEN ADJUSTABLE SHELVES LOCATED IN COMPARTMENTS PER ORDER 7. THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED IN COMPARTMENTS PER ORDER 8. ONE ADJUSTABLE SHELF WITH FLAT TOP LOCATED IN COMPARTMENT PER ORDER 9. ONE RECEPTACLE LOCATED IN COMPARTMENT PER ORDER 10. TWO RECEPTACLE STRIPS LOCATED IN COMPARTMENTS PER ORDER			11. THREE PAC TRAC MOUNTING SYSTEMS MOUNTED ON COMPARTMENT BACK WALLS PER ORDER 12. ATKINSON 2-WAY INTERCOM 13. TECNIG RING LIGHTING ON AERIAL LADDER 14. DUAL L.E.D. LIGHT STRIPS LOCATED IN COMPARTMENTS PER ORDER 15. NON-RAISED AERIAL PEDESTAL 16. 1500 GPM HIGH FLOW WATERWAY 17. LIMITED RETRACTION NOT REQUIRED			CHASSIS DATA MAKE PIERCE MODEL ENFORCER		TITLE FOR DWG NO.	107' ASCENDANT AERIAL LADDER AND BODY ASSEMBLY MCKINNEY FIRE DEPARTMENT MICKINNEY, TX 42092AD		DRAWN BY CHECKED BY SHEET SIZE SHEET NO.	08MAR24 20MAR24 D 1 OF 1