

Saber FR Chassis

24,000 lb 523-190 Dana Axle

510 HP Paccar MX13 Engine

ALLison 6th Gen, 4000 EVS P

19" Extended Polished Strainless Steel

7010 Enforcer FR Cab

30.75" FF Rollup Rear Compt

161" Rollup Full Height Front & Rear FDLER

45" Control Zone Side Mount

1500 GPM Waterous CSU

(2) 1.50" Standard Capacity

(1) 2.50" Standard Capacity

SpeedLays Not Required

Generator Not Required






Provisions for Future Husky 3/12

20 Gallon Foam Cell

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KISSMAUL SWIVEL AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. BATTERY CHARGE INDICATOR DISPLAYED THROUGH DRIVER SIDE WINDOW
6. SIX ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
8. PROVISIONS FOR FRONT INLET

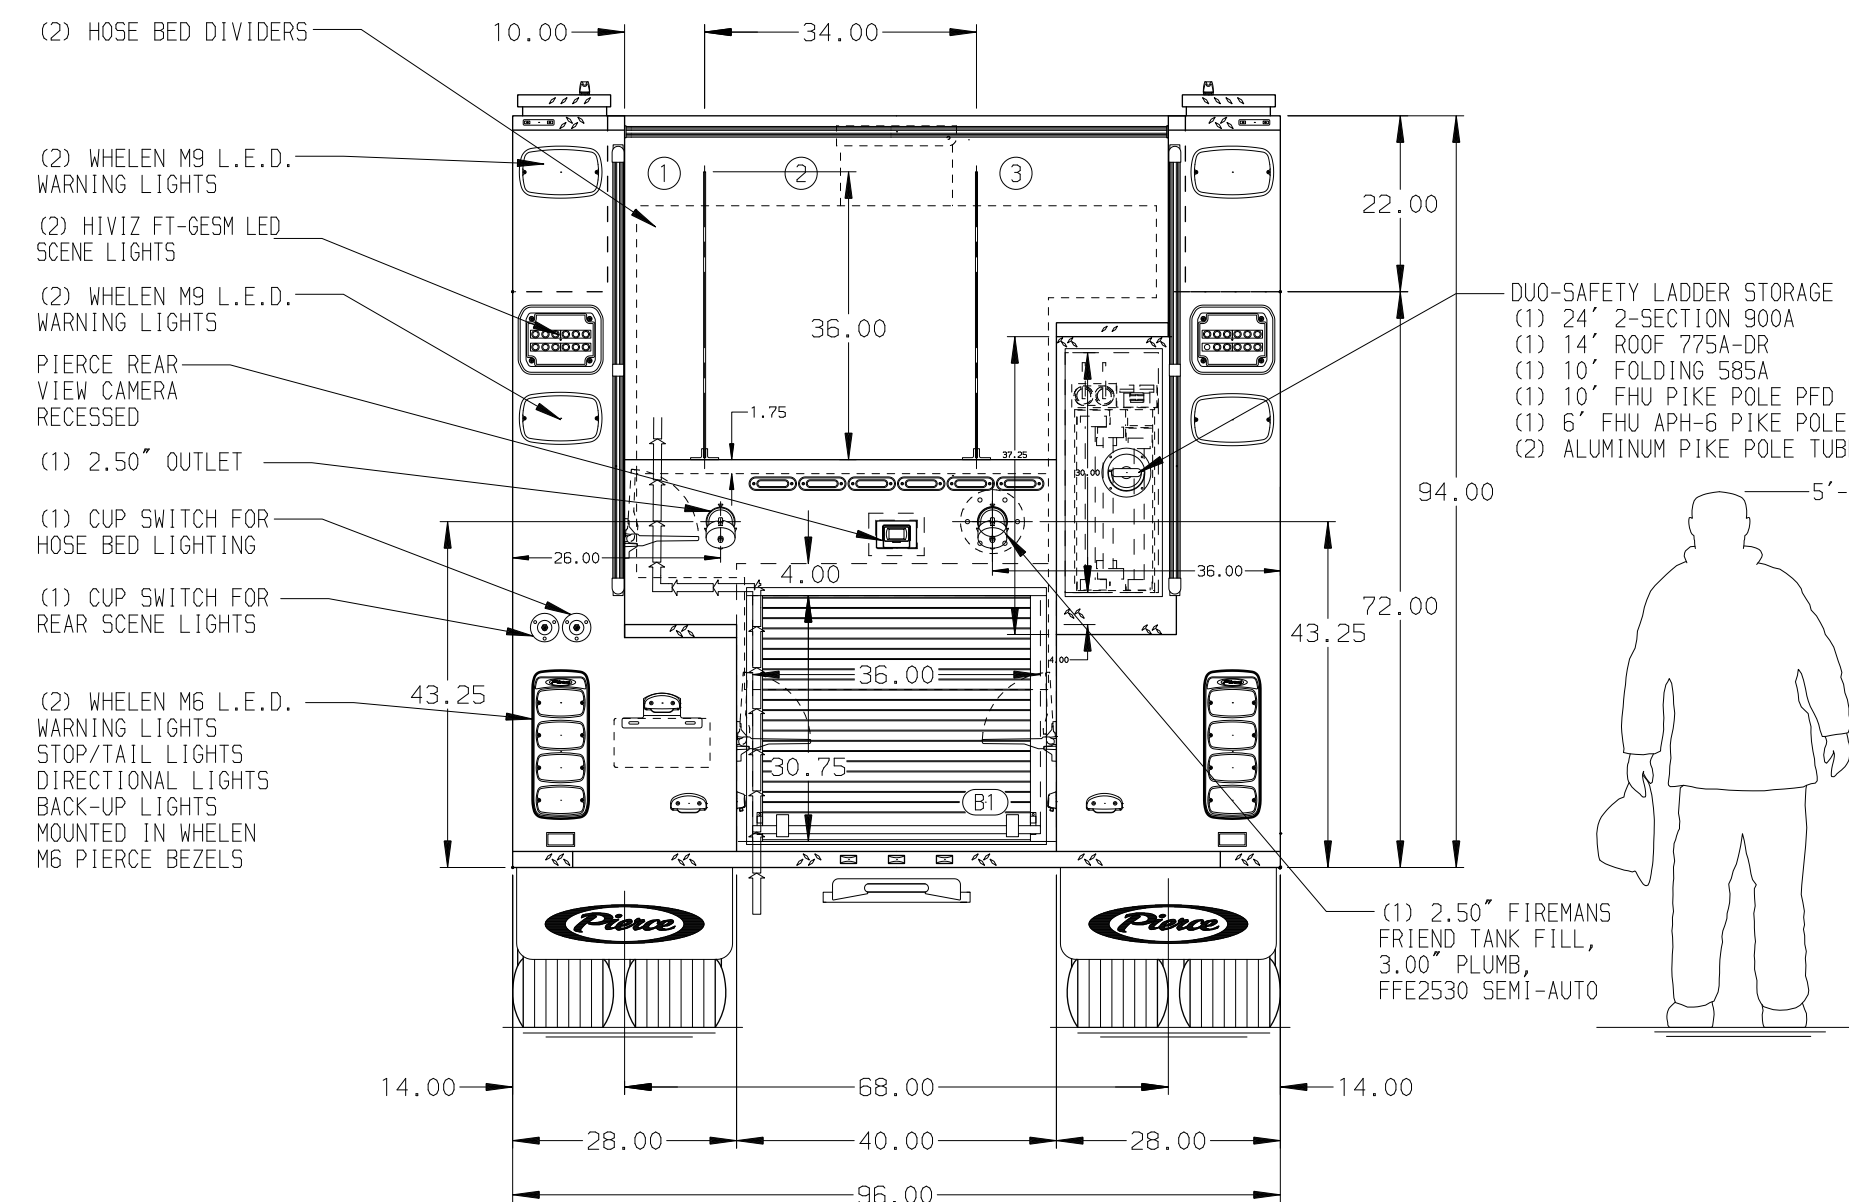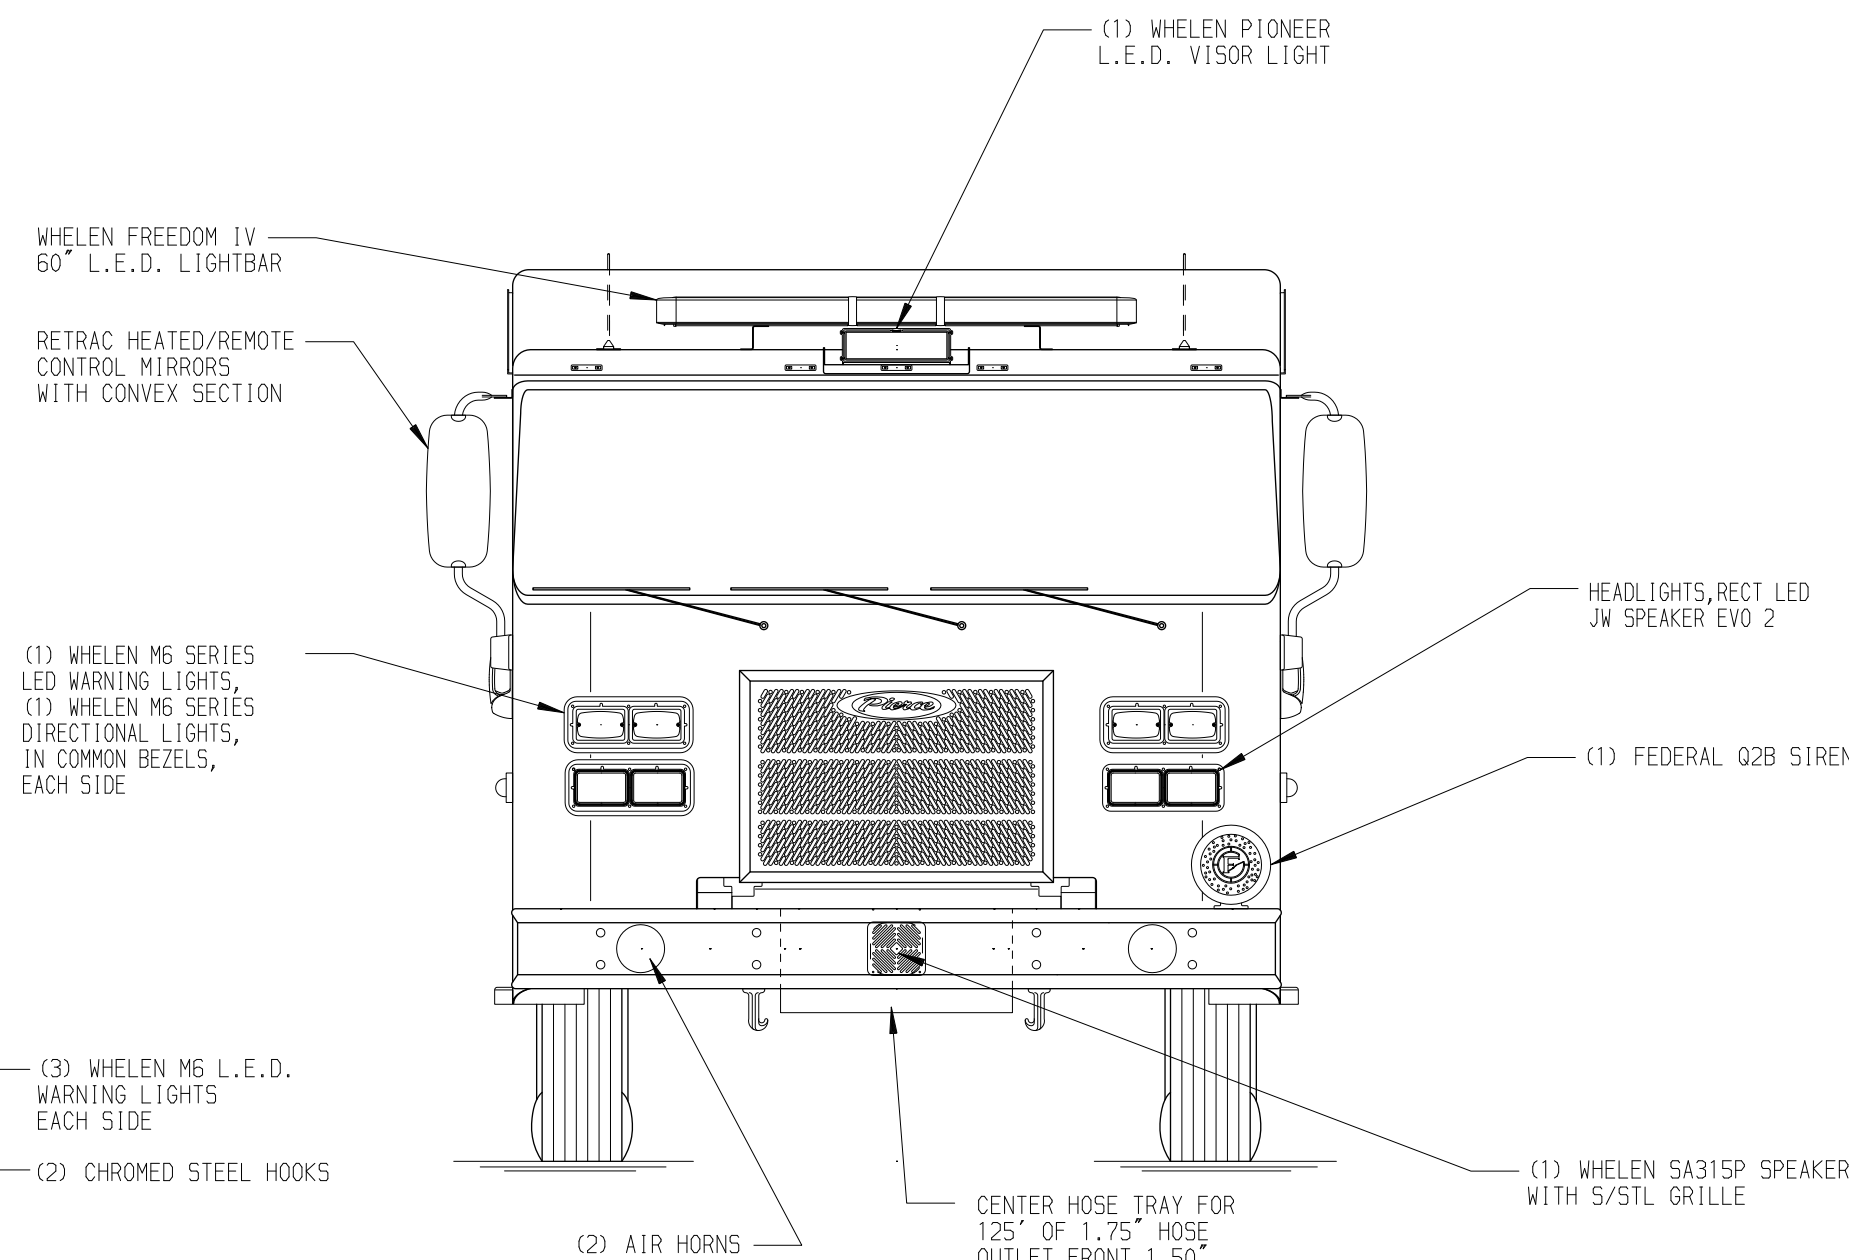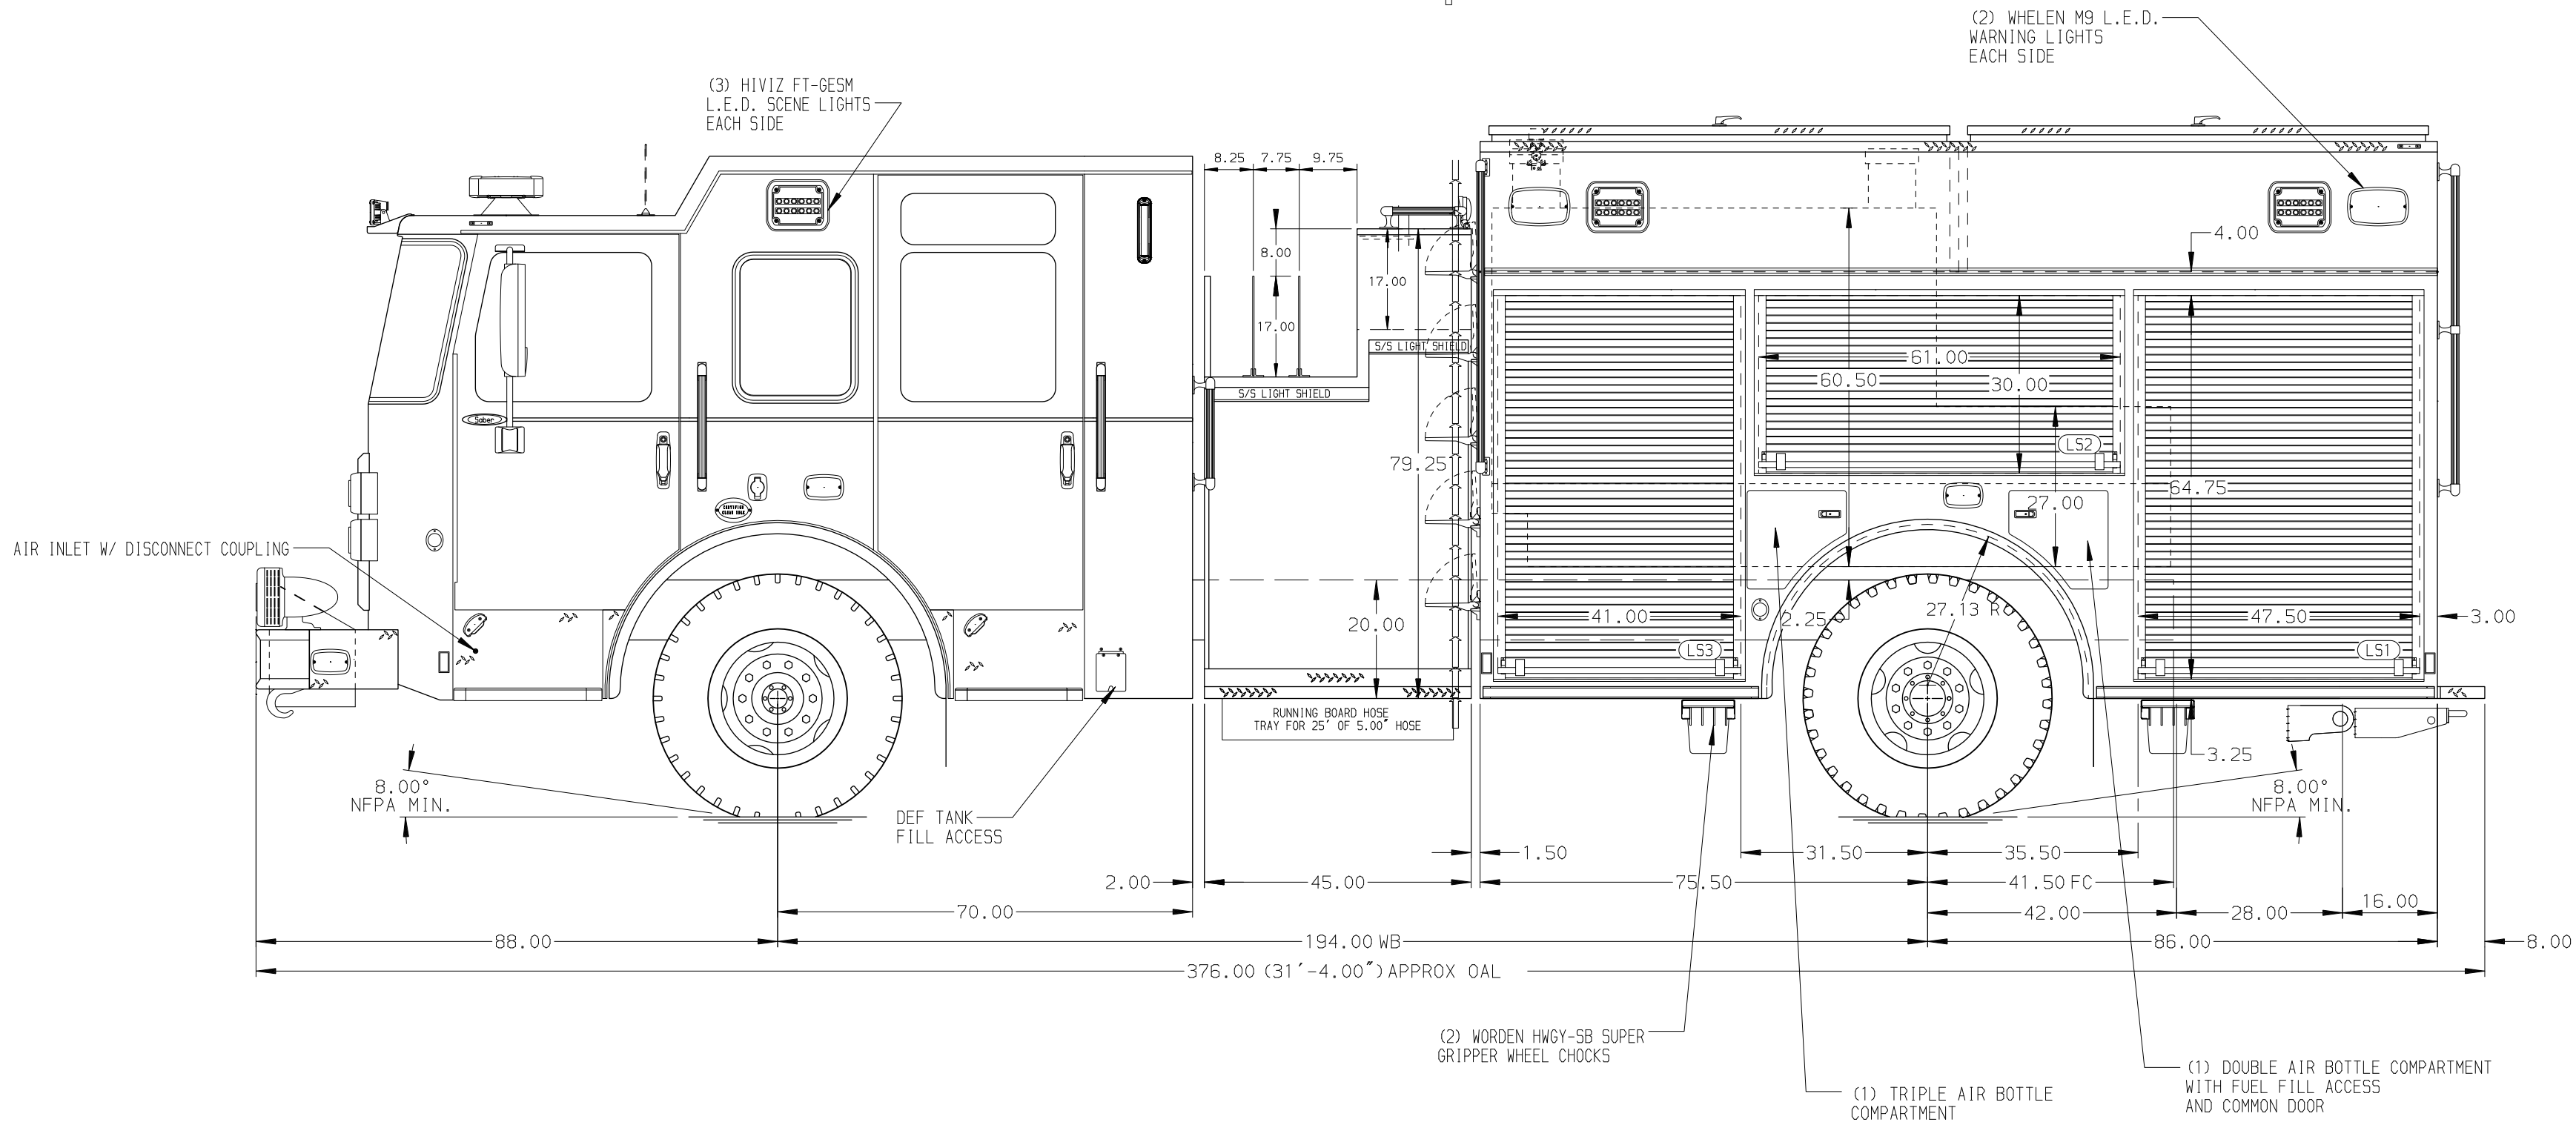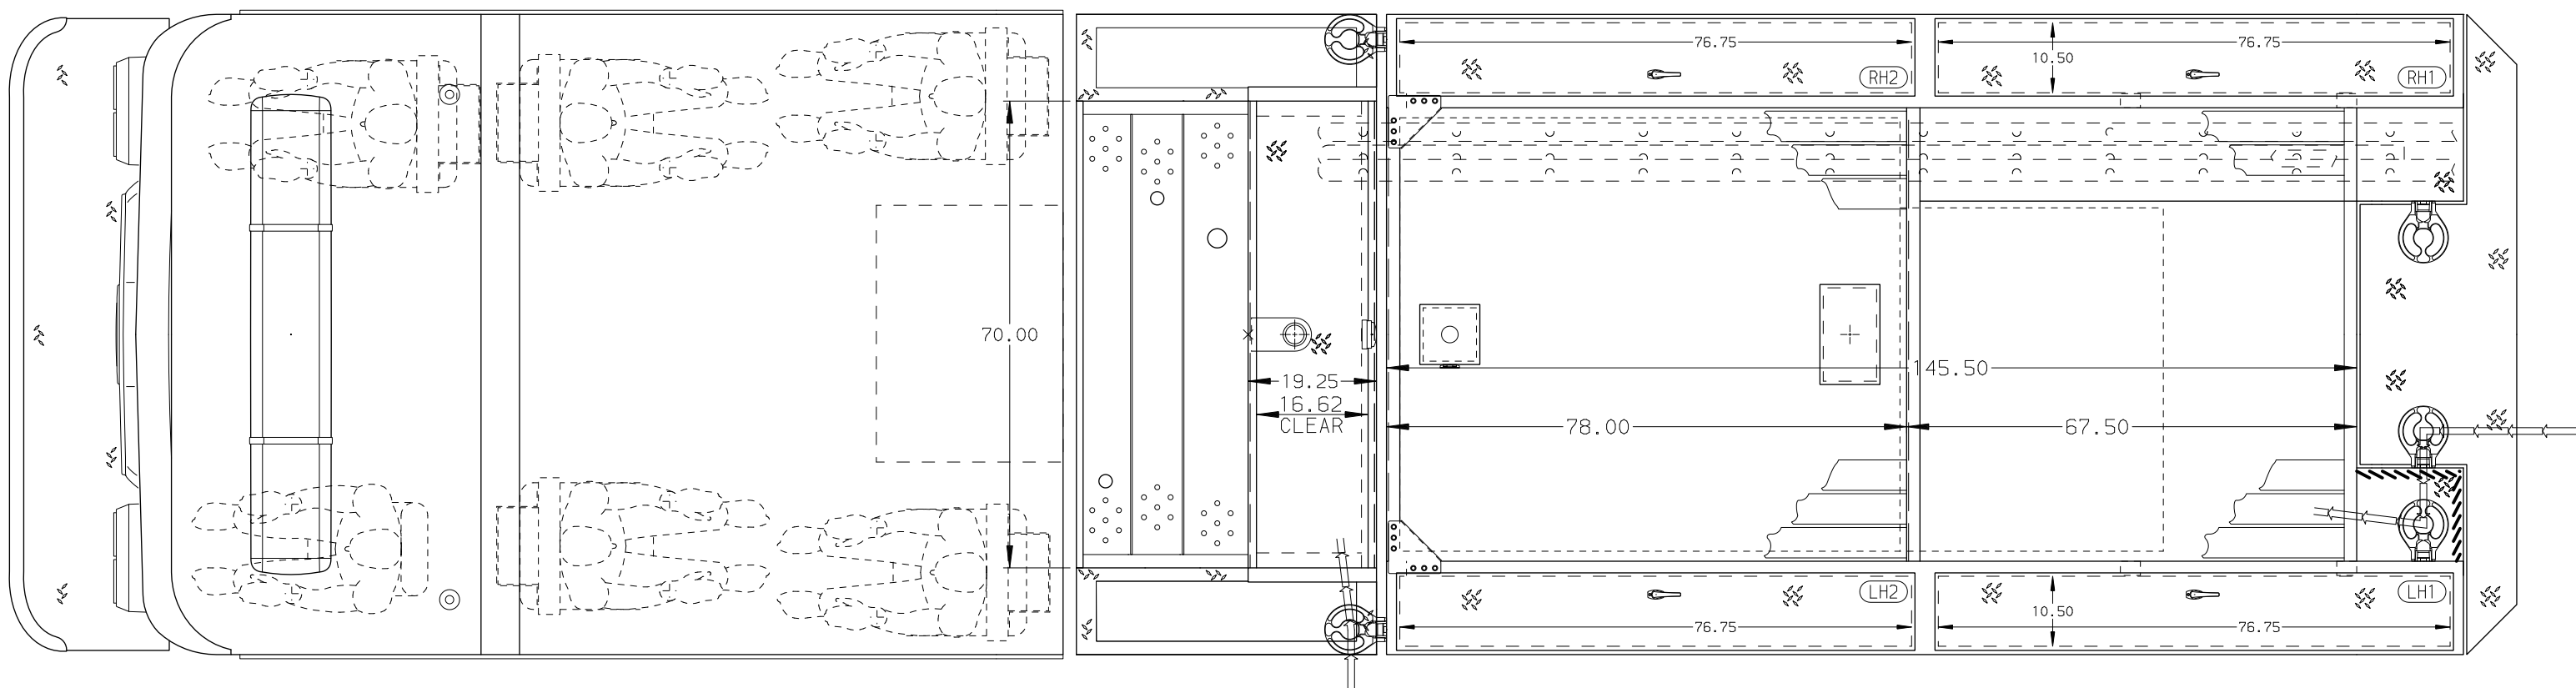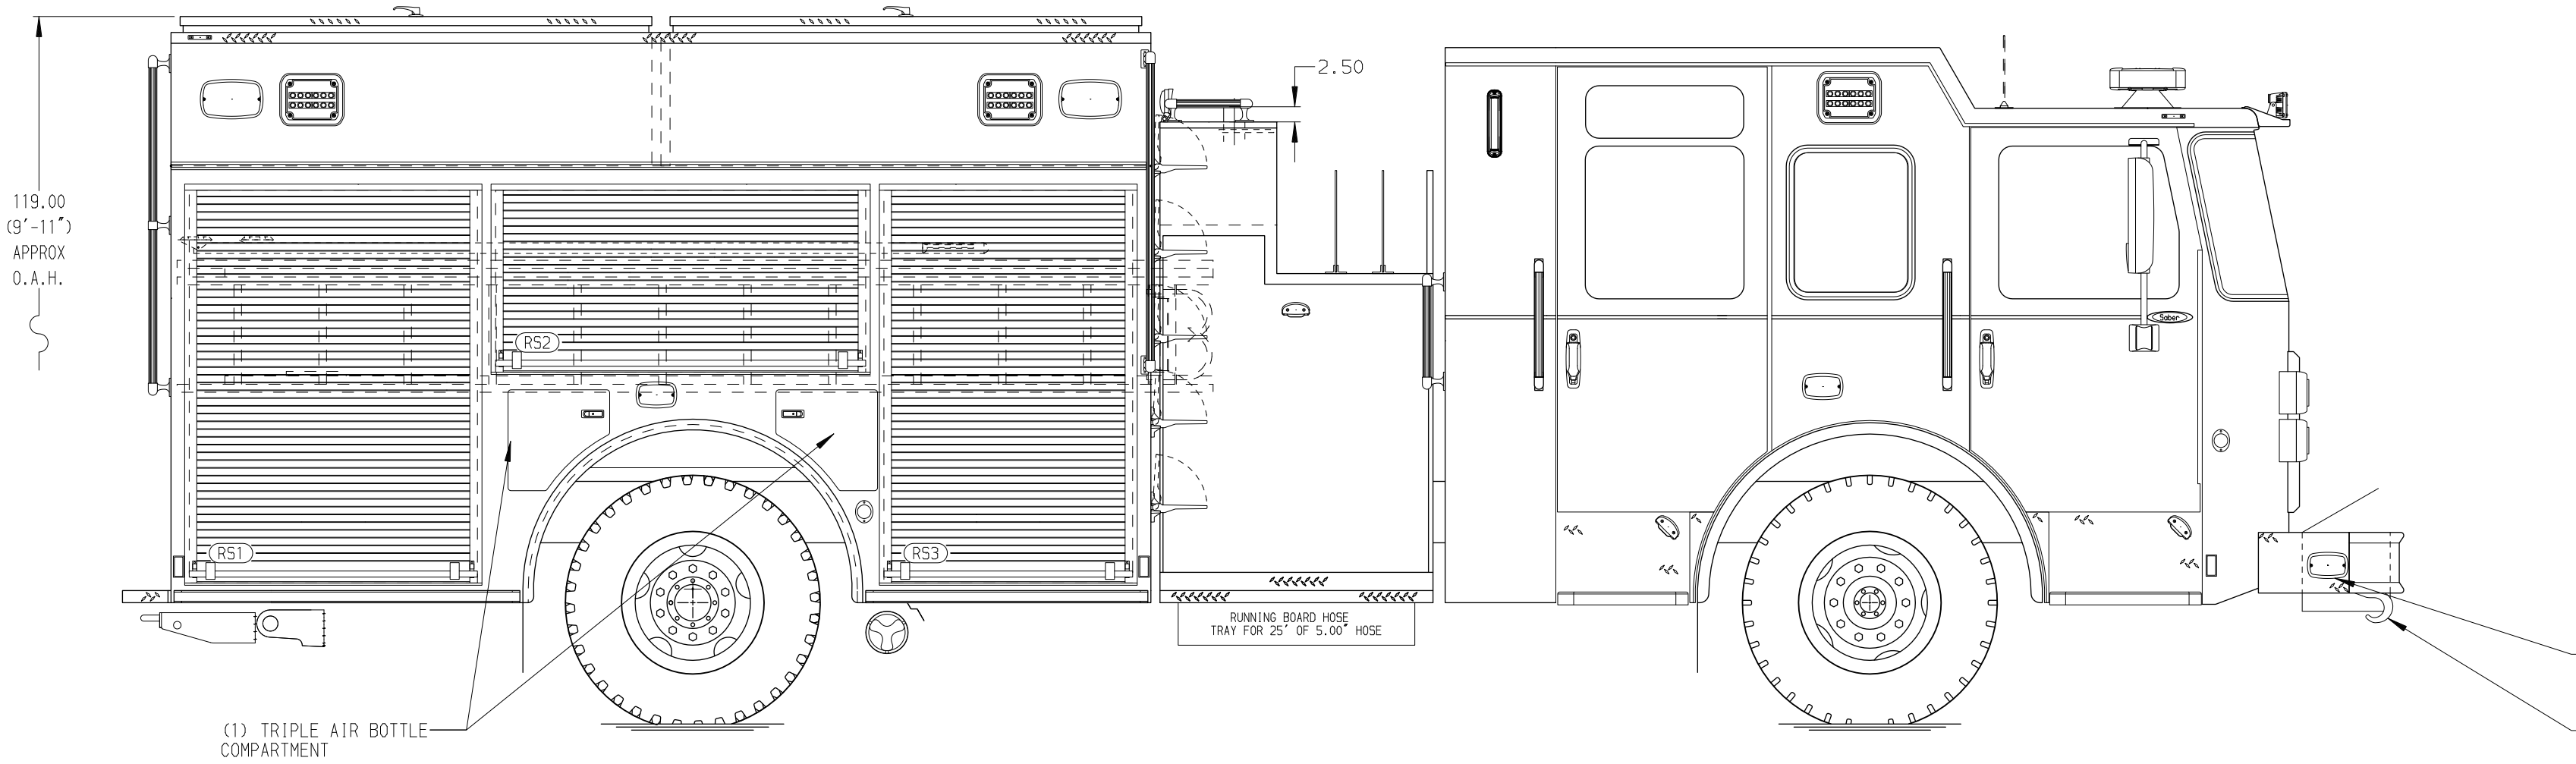

 MANUFACTURING INC.		JOB NO.	42692
		SCALE 1:24	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY VHO	17MAY24
FOR	Pierce Field Unit	CHECKED BY JAP	17MAY24
DWG NO.	42692AD		SHEET SIZE D SHEET NO. 1 OF 1