


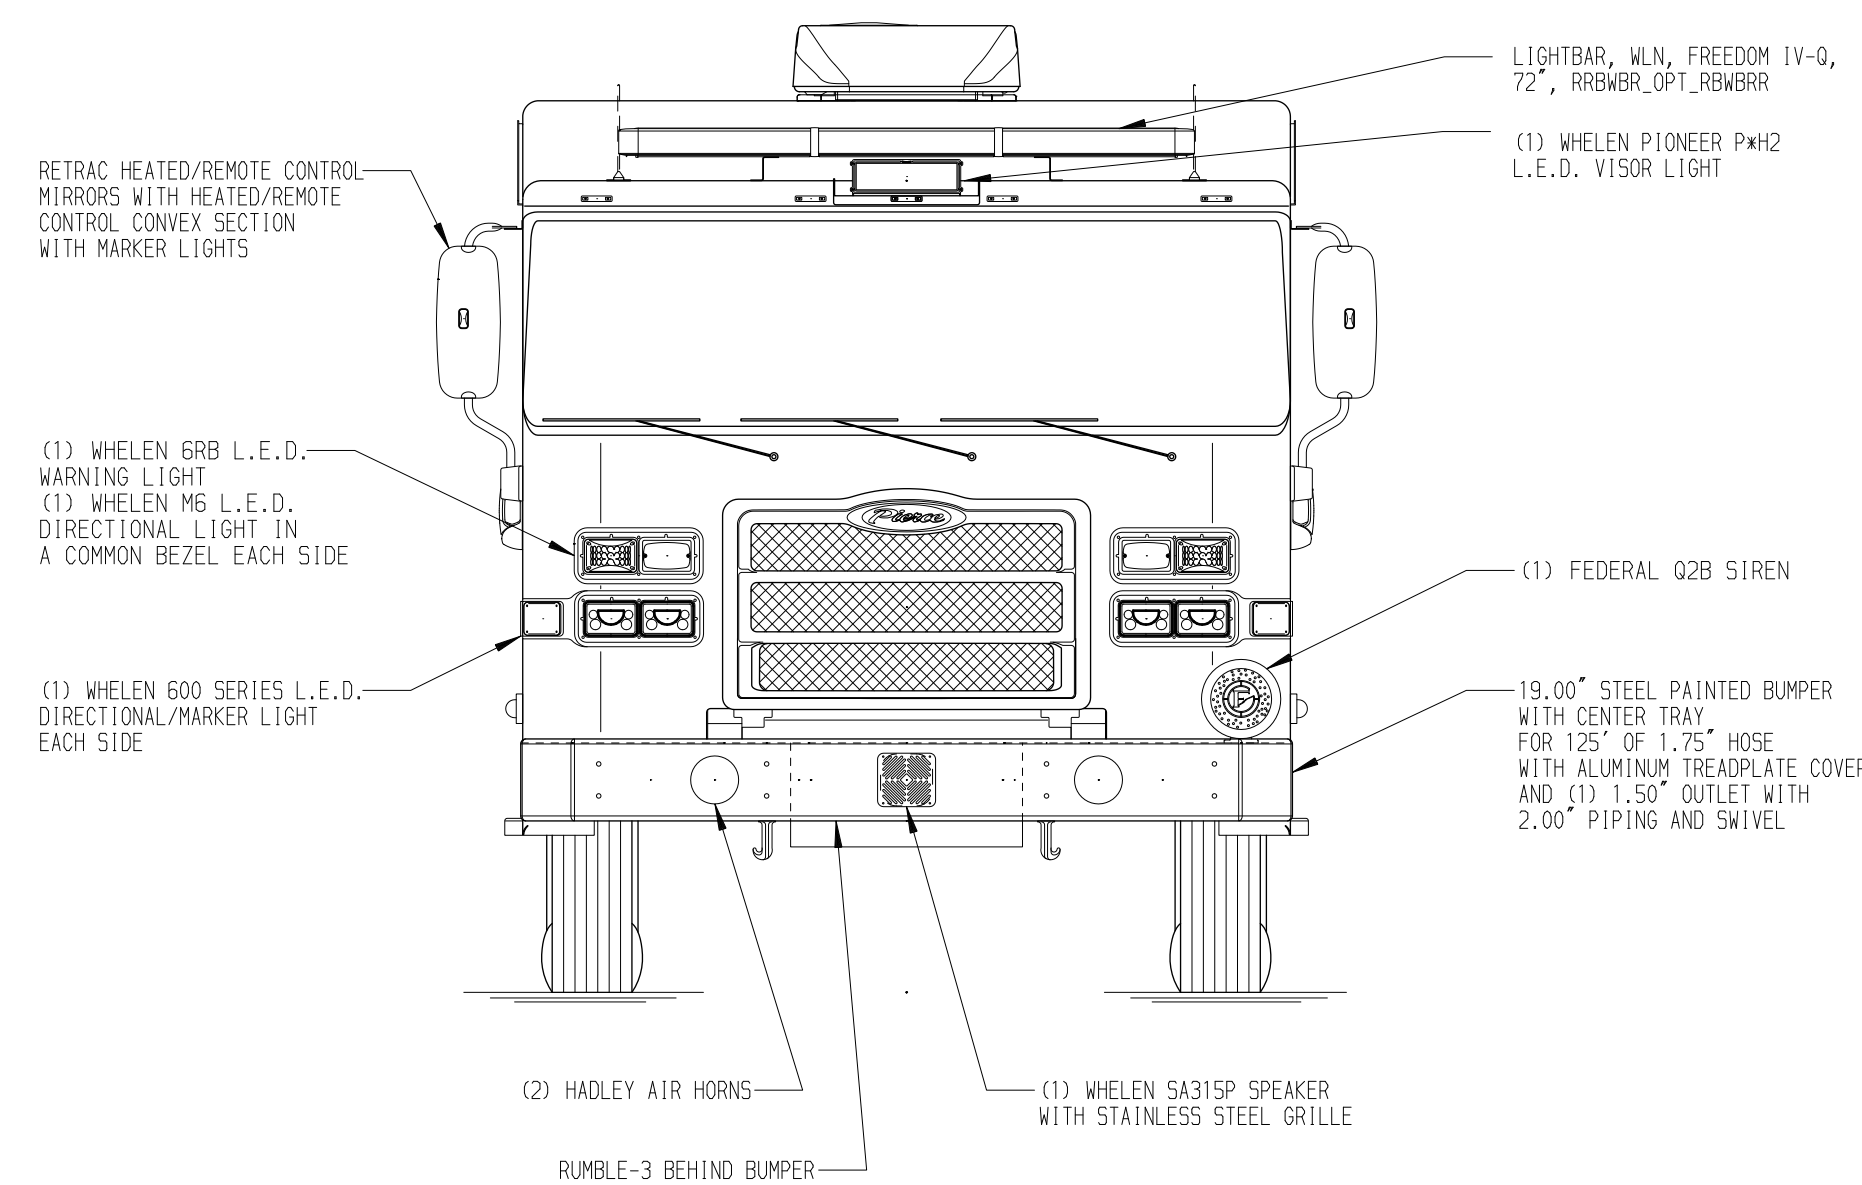

(1) 0.25" PERMANENT HOSE BED DIVIDER

(1) 2.50" OUTLET

LIGHTS, REAR/SIDE UP ZONE, WLN M6 M9** M9** M9** 4LTS**

(1) WHELEN M62C L.E.D. SCENE LIGHT

(1) 2.50" OUTLET

(1) CUP SWITCH FOR REAR HOSEBED LIGHTS

(1) CUP SWITCH FOR REAR SCENE LIGHTS

(1) CUP SWITCH FOR DS SCENE LIGHT

(1) CUP SWITCH FOR PS SCENE LIGHT

(2) WHELEN M6 L.E.D. WARNING LIGHTS STOP/TAIL LIGHTS DIRECTIONAL LIGHTS BACK-UP LIGHTS MOUNTED IN WHELEN M6 PIERCE BEZELS

(1) PIERCE BACKUP CAMERA WITH A BRUSHED STAINLESS STEEL GUARD

DUO-SAFETY LADDER STORAGE

- (1) 24" 2-SECTION 900A
- (1) 14" ROOF 775A
- (1) 10" FOLDING 585A
- (3) ALUMINUM NY PIKE POLE TUBES
- (1) 8" FHU NY PIKE POLE RH-8
- (2) 6" FHU NY PIKE POLES RH-6

5'-7"

NFPA 19 (2024)

NFPA 1900
(2024)
COMPLIANT

	 MANUFACTURING INC.		JOB NO.	43374
			SCALE 1 : 24	DATE
TITLE	1500GPM, 730G WATER, 20G FOAM 152" PUMPER, HARDWIRED		DRAWN BY ADP	27FEB25
FOR	OKLAHOMA CITY FIRE DEPARTMENT OKLAHOMA CITY, OKLAHOMA		CHECKED BY JAP	27FEB25
DWG NO.	43374AD		SHEET SIZE D	SHEET NO. 1 OF 1

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

				CHASSIS DATA
				MAKE
				P I E R C E
	18APR25	VH0	JAP	MODEL
REV	DATE	BY	CH	ENFORCE