

Enforcer Chassis

24,000 lb Meritor Axle

510 HP Paccar MX13

ALLison 6th Gen. 4000 EVS P

19" Extended Painted Steel

7010 Enforcer Cab

30.75" FF Rollup Rear Comp.

152" Rollup Full Height Front & Rear FDI FR

1500 GPM Waterous CSI

(2) 1.50" Standard Capacity

(1) 2 50" Standard Capacity





SpeedLays Not Required

Generator Not Required


Husky 3 Foam Suster

25 Gallon Foam Cell Not Reduced Water

120.00
(10'-0"
APPROX
O.A.H.

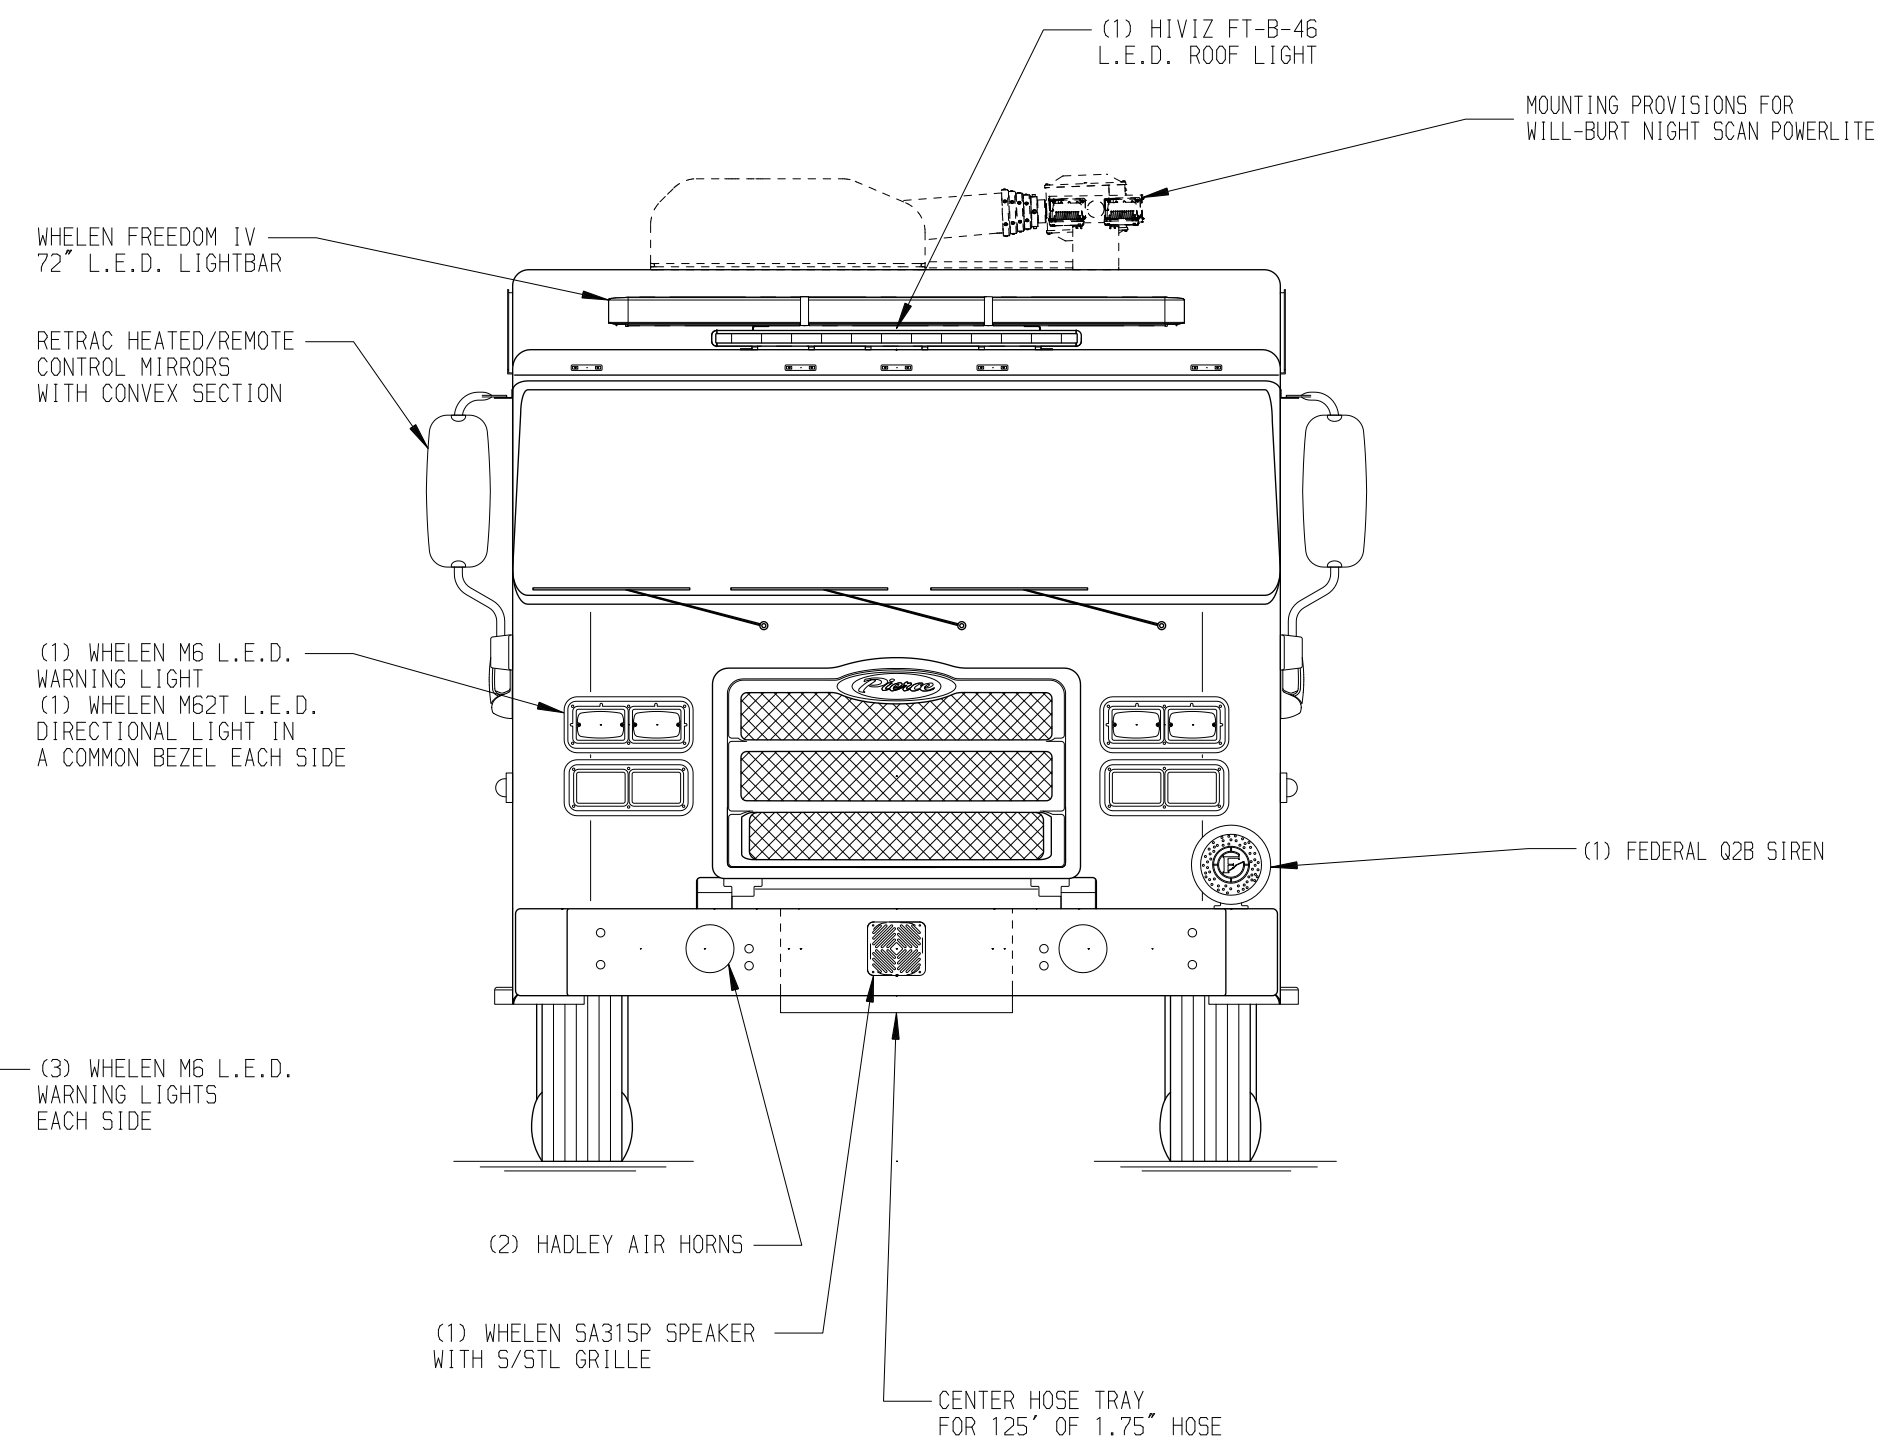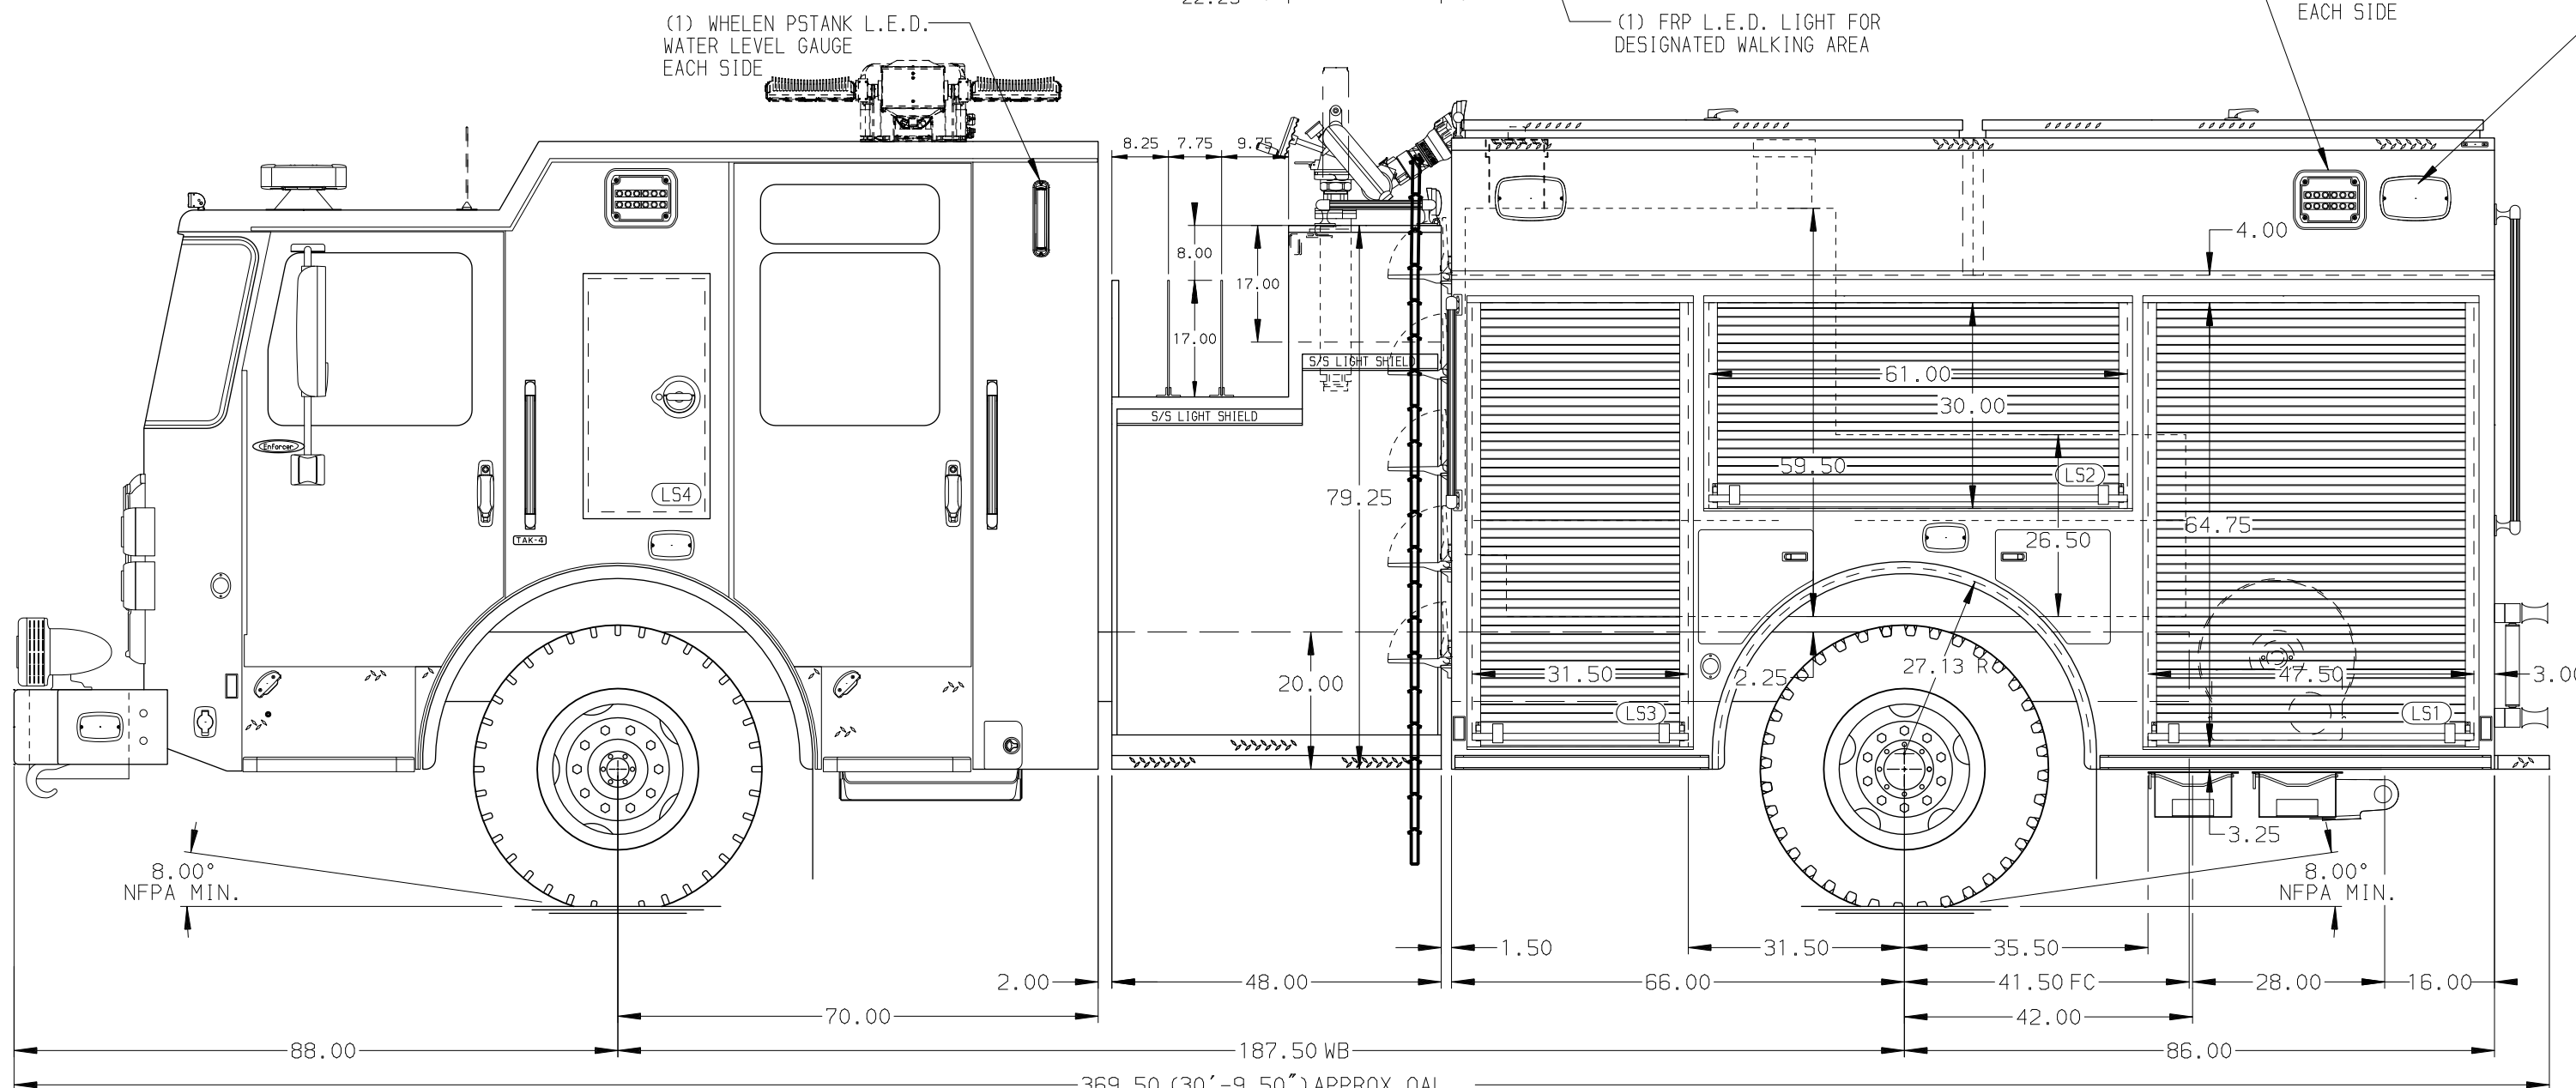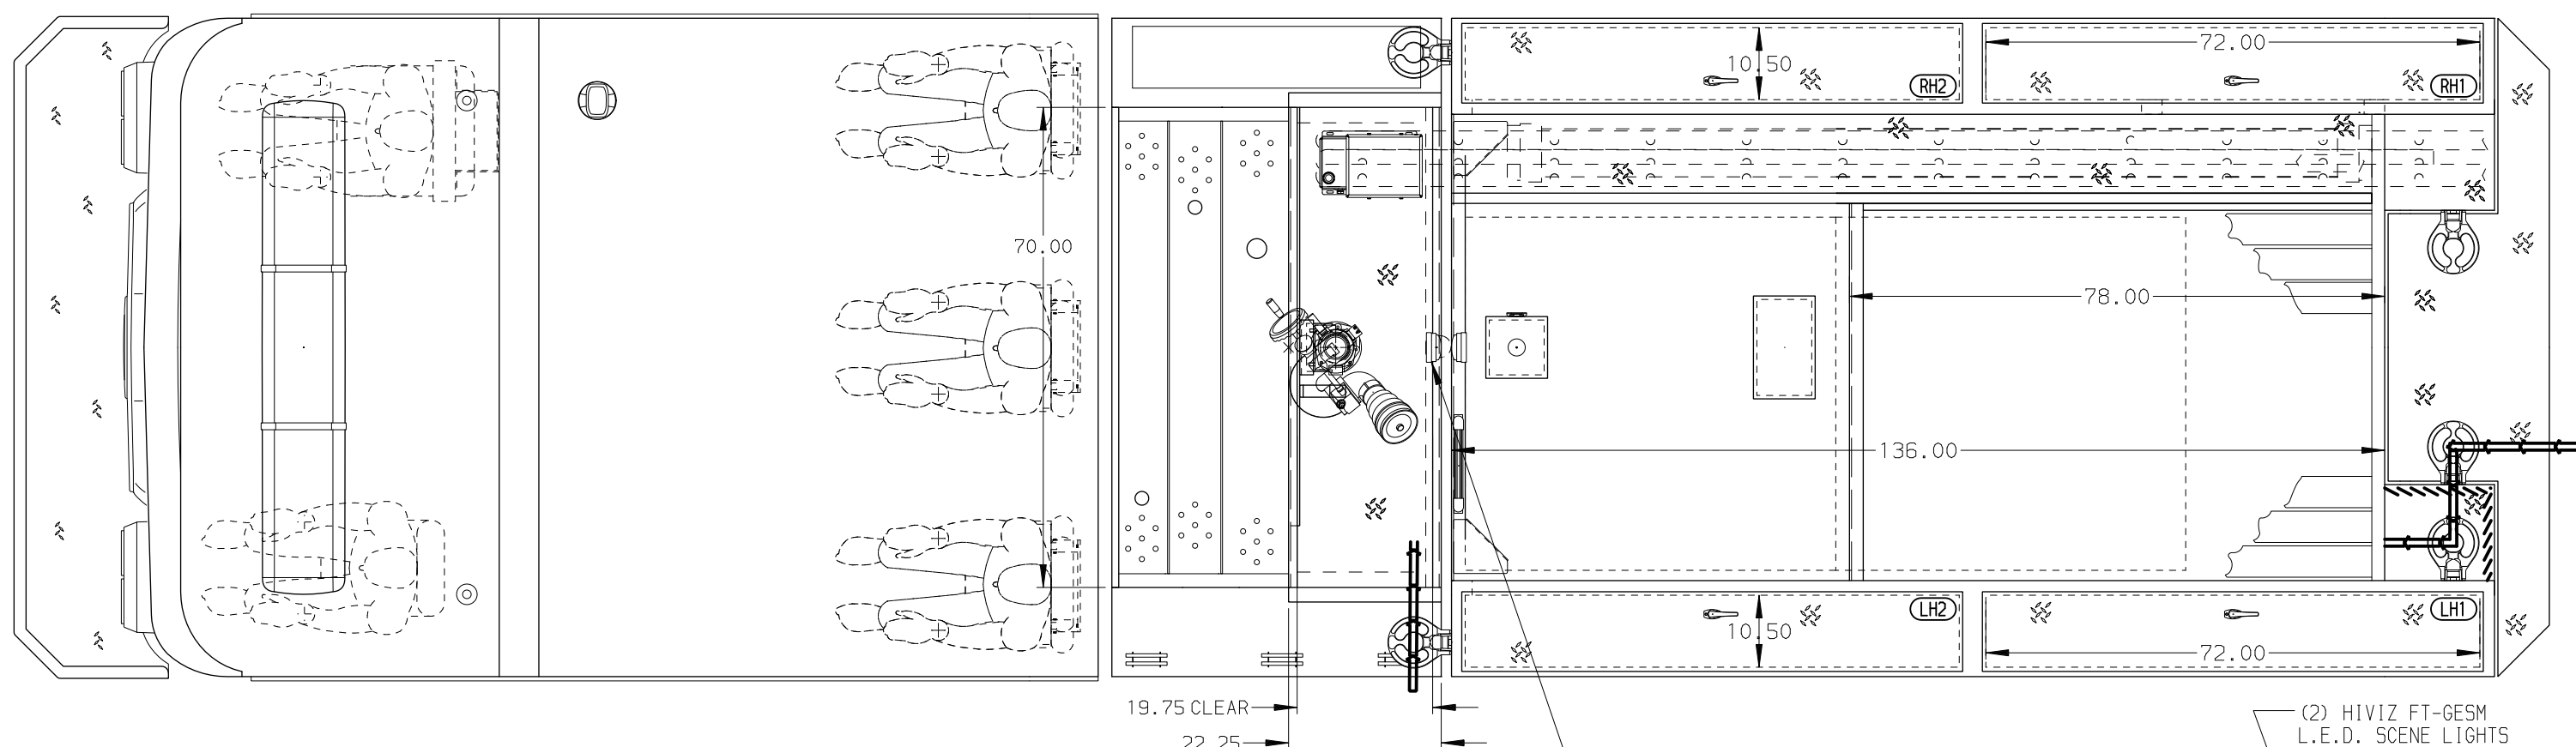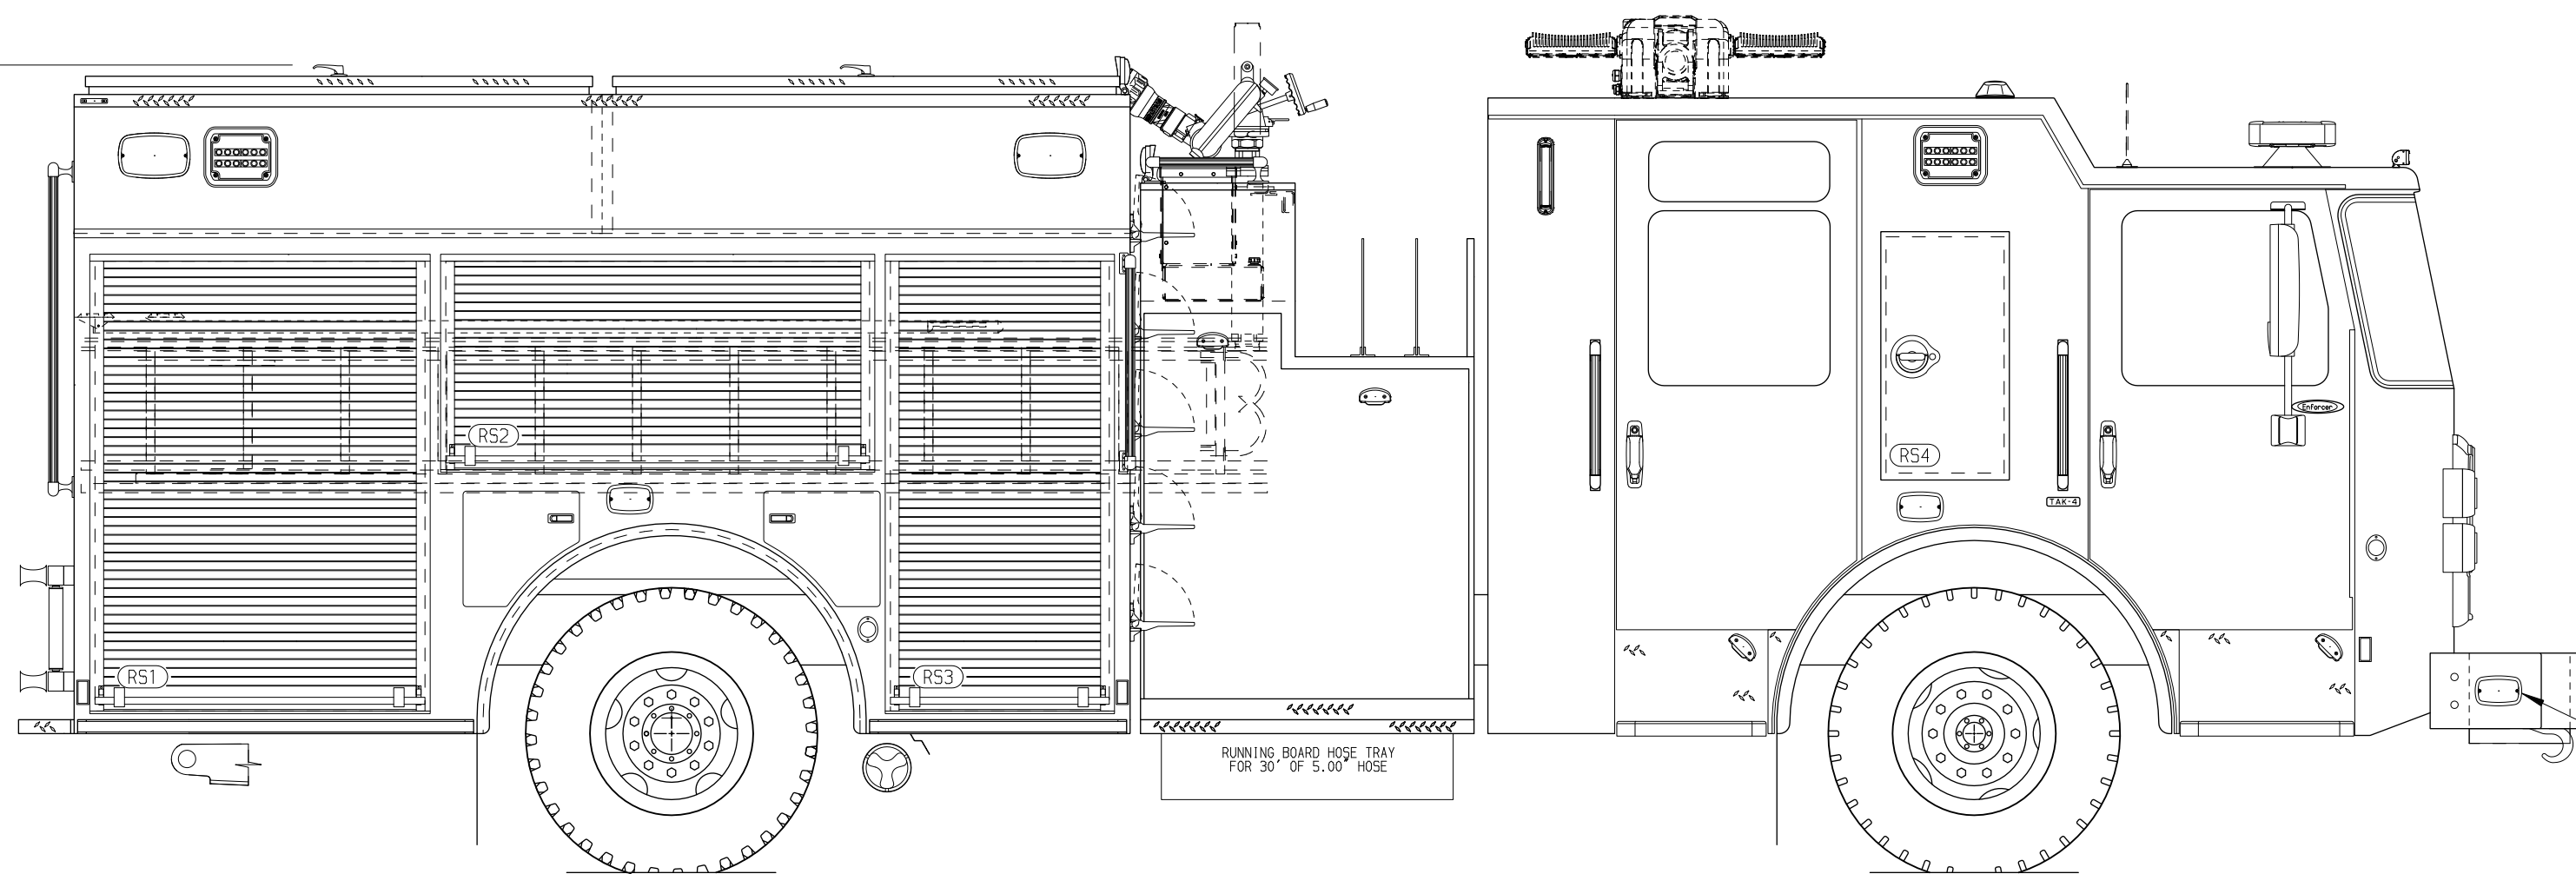

HOSEBED CAPACITY	
BED 1	
750' OF 3.00" D.J. POLY HOSE	
BED 2	
1000' OF 5.00" D.J. POLY HOSE	
BED 3	
250' OF 3.00" D.J. POLY HOSE	

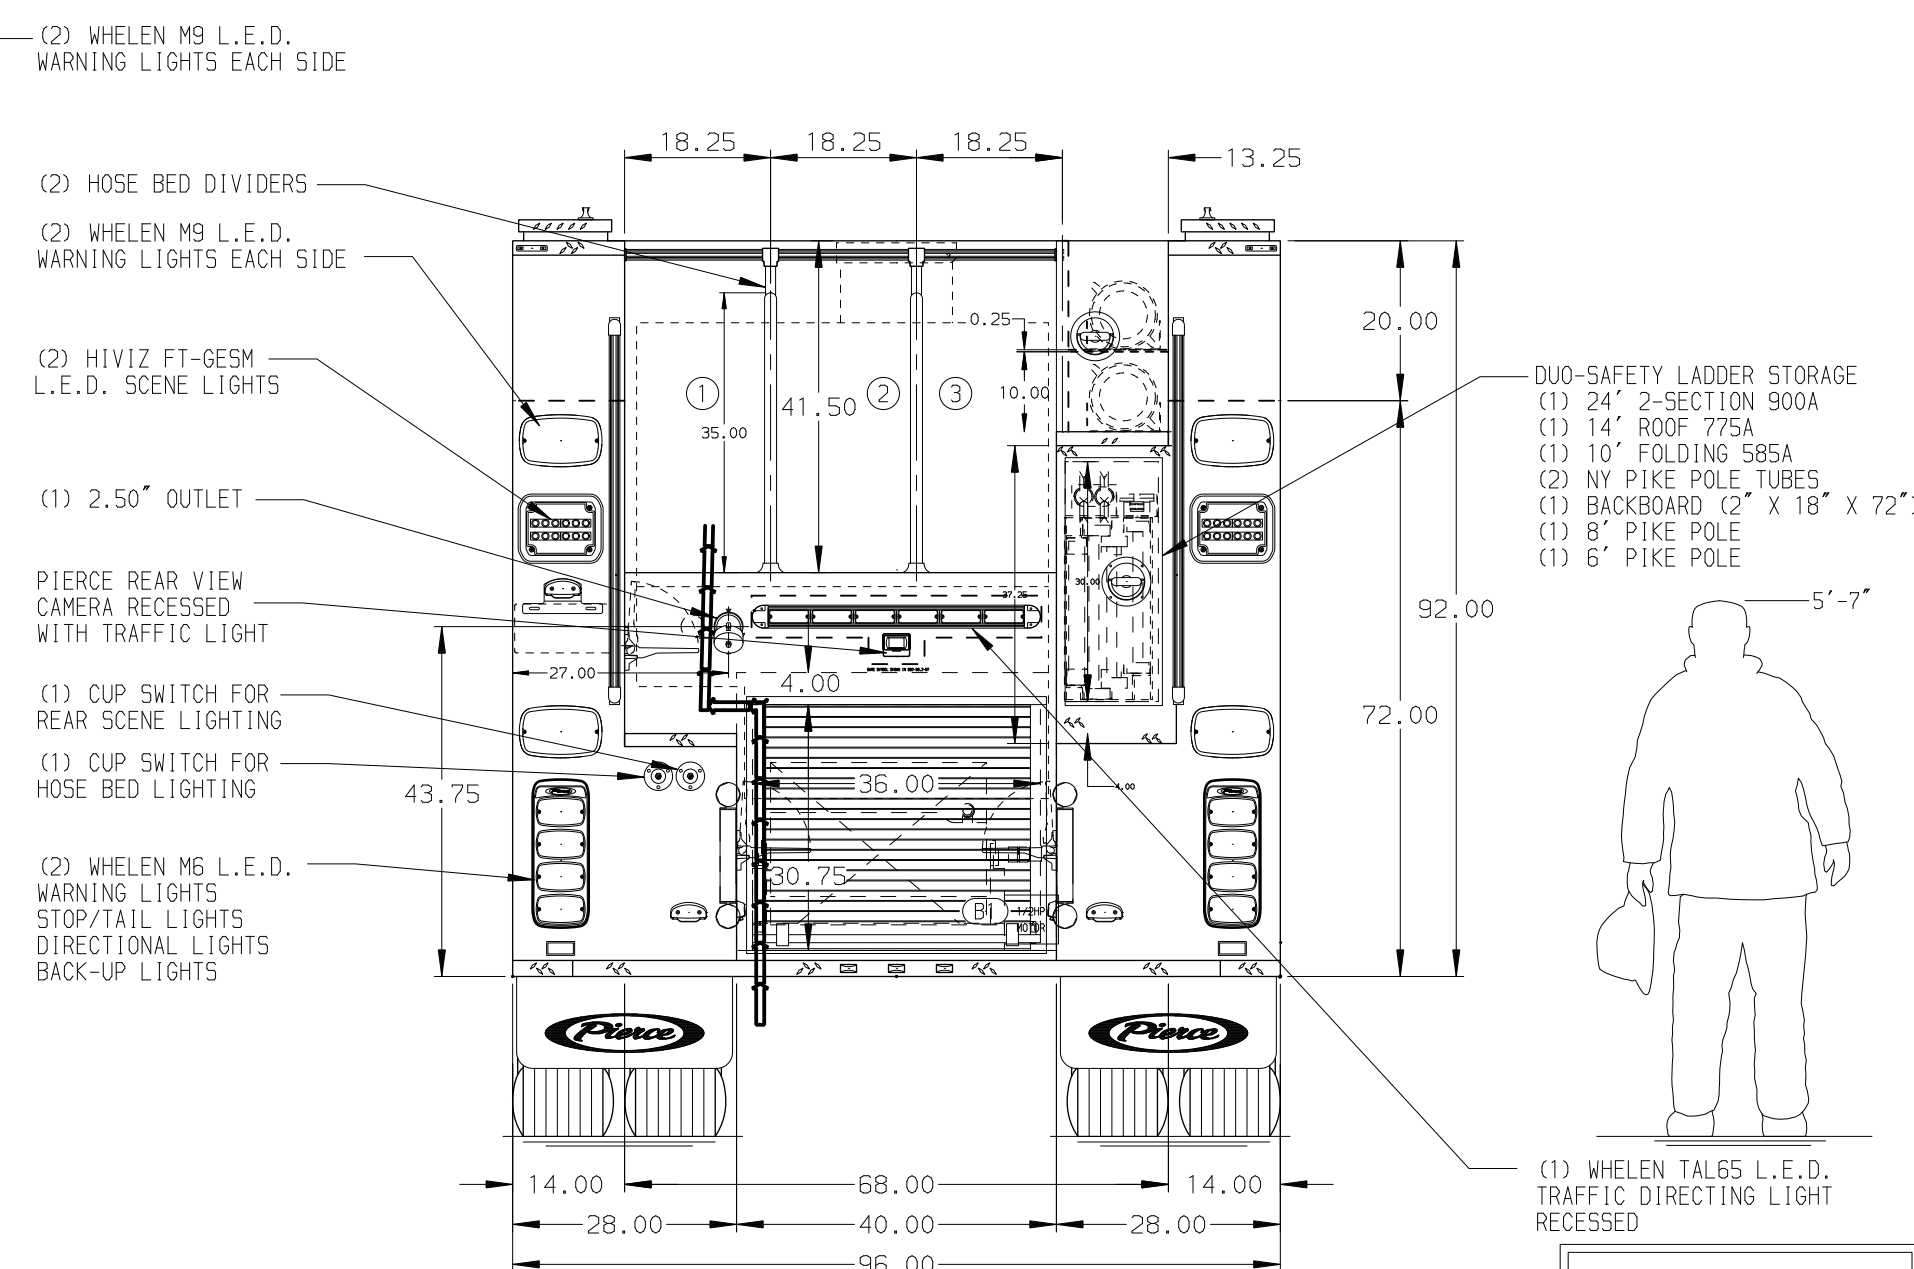

NFPA 1900
(2024)
COMPLIANT

APPROVED BY: _____
DATE: _____

				CHASSIS
				DATA
				MAKE
B	24SEP25	MMF	AST	PIERCE
A	30JUN25	MMF	AST	MODEL
REV	DATE	BY	CH	ENFORCE



MANUFACTURING INC.

Pierce Pumper Approval Drawing

Pierce Stock Field Unit

DWG
NO.

43849AD

JOB NO. 43849

SCALE	DATE
1.24	

DRAWN BY	29MAY25
----------	---------

CHECKED BY	G. JUNG
------------	---------

SHEET SIZE	SHEET NO.
D	1 OF 1

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-E-ECT LOCATED ON DRIVER SIDE CAB CORNER
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPPWELL
4. BATTERY CHARGE LOCATED BEHIND DRIVER'S SEAT
5. FIVE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
6. ONE 120V RECEPTACLE LOCATED PER SHOP ORDER
7. FOUR FLOOR MOUNTED TRAYS LOCATED IN COMPARTMENT PER SHOP ORDER
8. ONE HANNAY BOOSTER RELT (MODEL EF34-23-24) FOR 200" OF 1.00" HOSE LOCATED IN B1
9. PROVISIONS FOR FRONT INLET.