
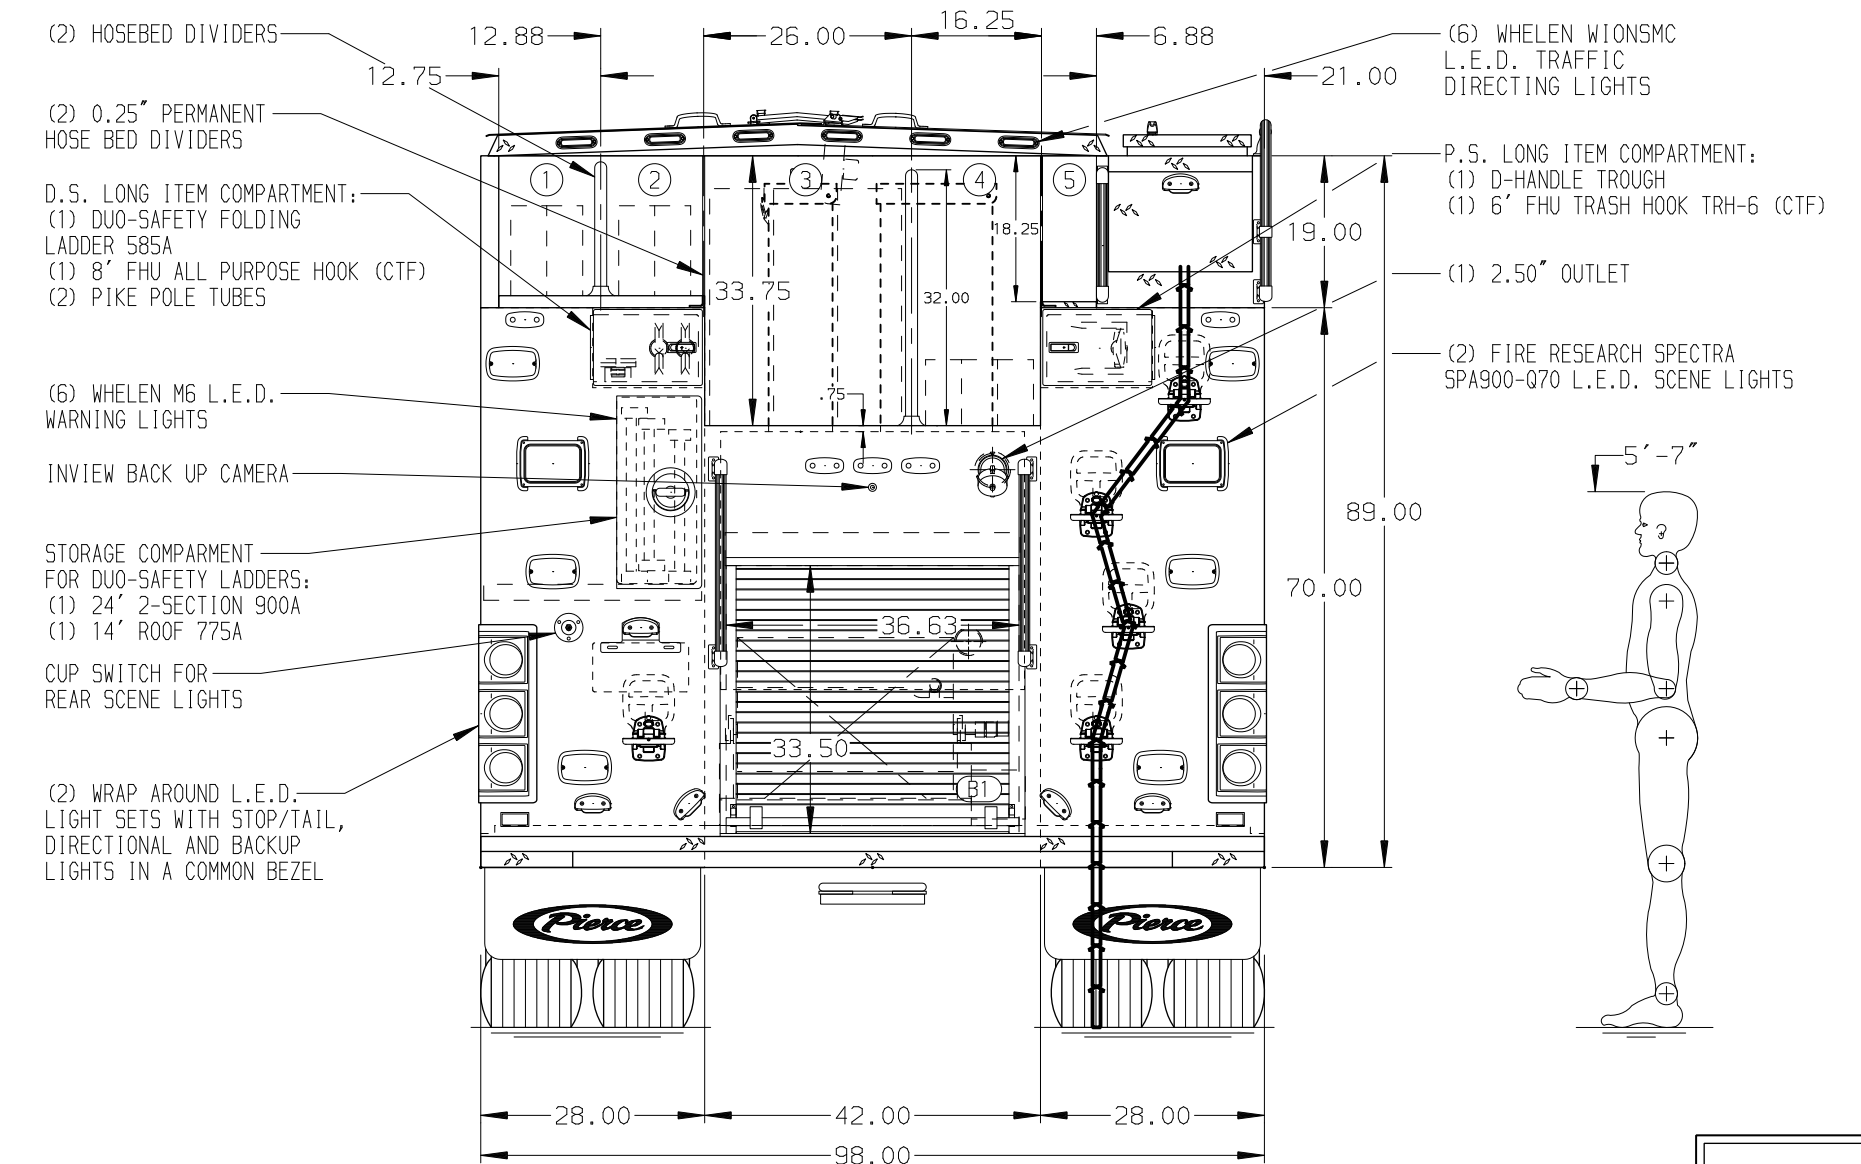


- HOSEBED CAPACITIES
- ① 250' OF 2.50" D.J. POLY HOSE
 - ② 250' OF 2.50" D.J. POLY HOSE
 - ③ 1000' OF 5.00" D.J. POLY HOSE
 - ④ 250' OF 2.50" D.J. POLY HOSE
 - ⑤ OPEN

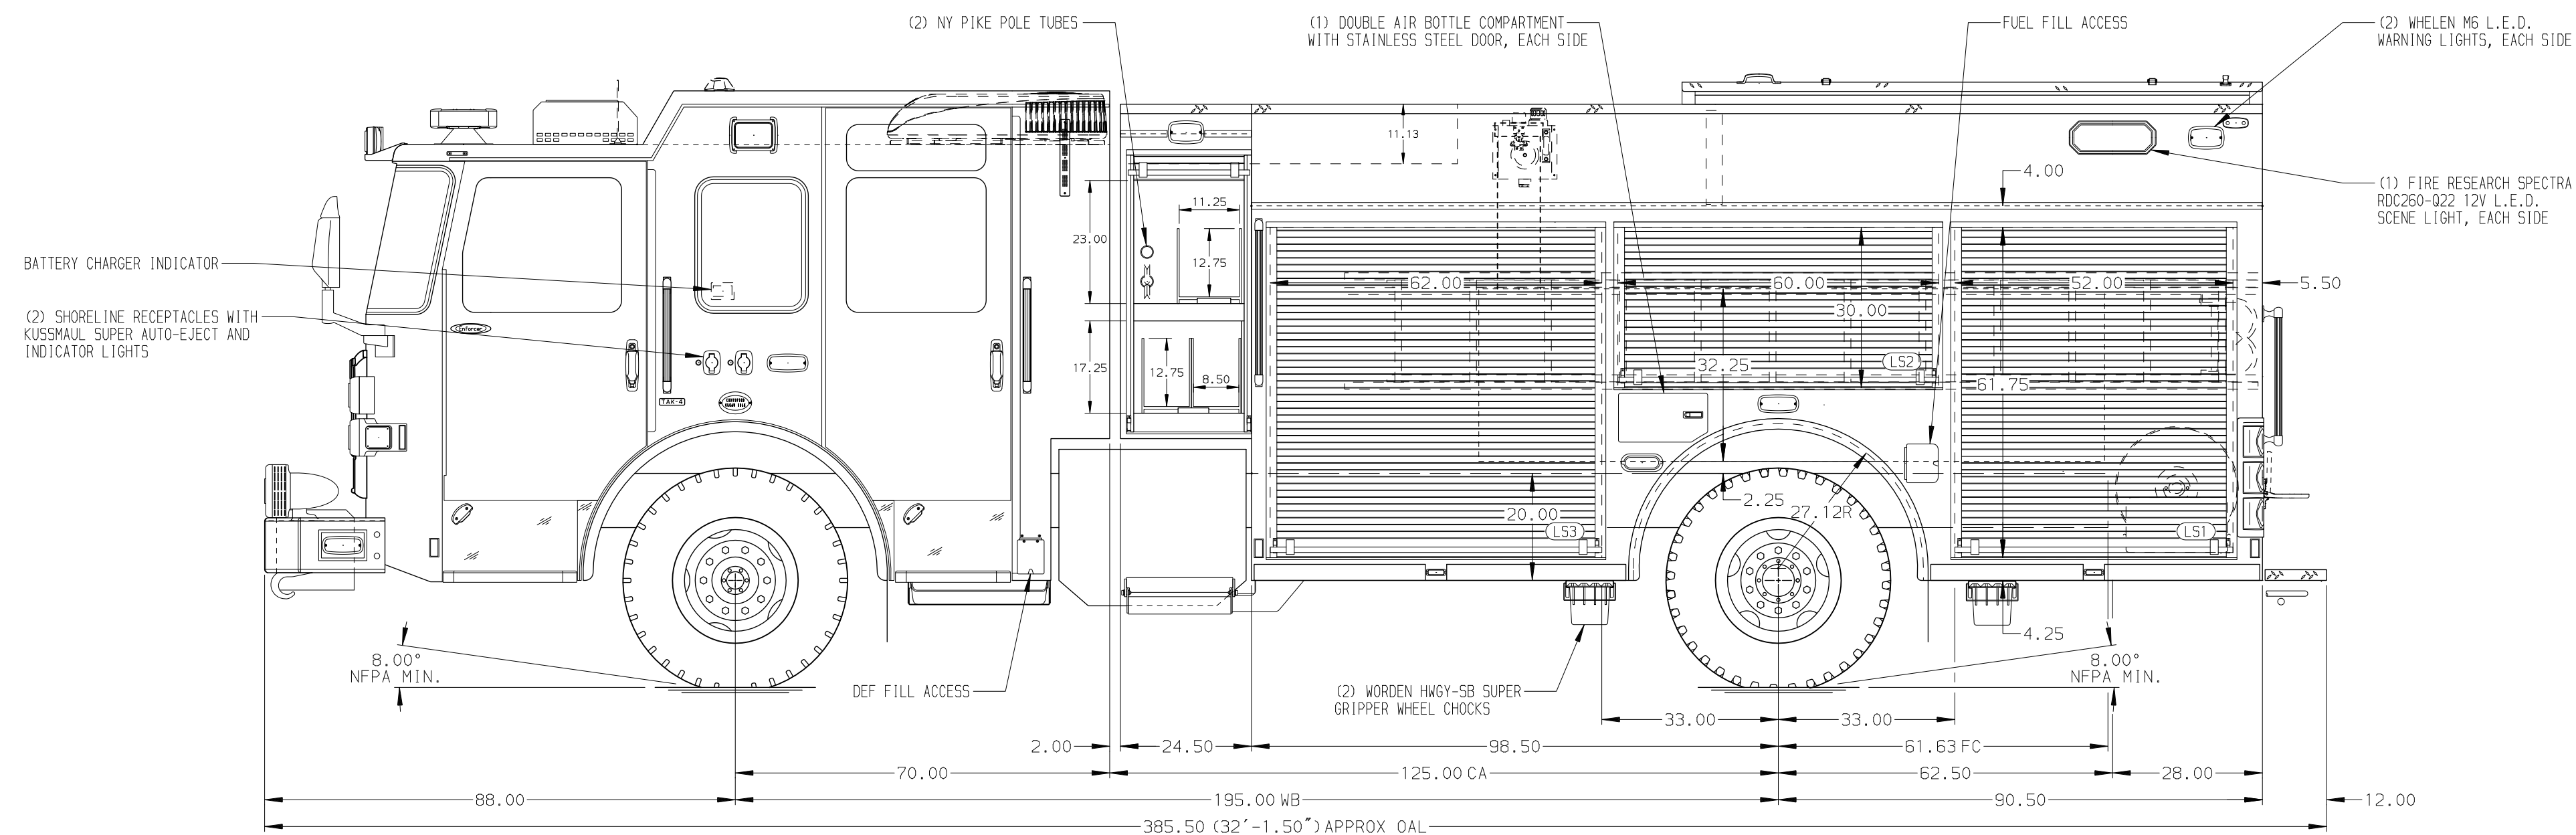

ALUMINUM BODY SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. KUSSMAUL AIR COMPRESSOR LOCATED BEHIND DRIVER'S SEAT
- 2. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
- 3. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- 4. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED PER SHOP ORDER
- 5. HANNAY BOOSTER HOSE REEL MODEL SB8F34-23-24 WITH CAPACITY FOR 200' OF 1.00" BOOSTER HOSE LOCATED IN B1

REV	DATE	BY	CH	ENFORCER
140C125	MPM	KBO		PIERCE
09SEP25	JDA	KBO		MODEL

		JOB NO.	44758
		SCALE	DATE
TITLE	1500 GPM, 520G TANK, 500G WATER, 20G FOAM 189" PUC, MUX	DRAWN BY	JDA 08AUG25
FOR	GRAND PRAIRIE FIRE DEPARTMENT GRAND PRAIRIE, TEXAS	CHECKED BY	KBO 14AUG25
DWG NO.	44758AD-SH1	SHEET SIZE	SHEET NO.
		D	1 OF 2

NFPA 1900 (2024) COMPLIANT