

PUMPER BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM

18,000 Lb Oshkosh Tak-4 Axle

AXLE, REAR

24,000 Lb Meritor Axle

ENGINE

450 HP Cummins L9

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

19" Extended Painted Steel

CAB

7010 Enforcer Cab

BODY WATER TANK

750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt

COMPT, PUMPER, DRIVER SIDE

152" RollUp Full Height Front & Rear FDLR

COMPT, PUMPER PASS. SIDE

152" RollUp Full Height Front & Rear FDLR

FIRE SUPPRESSION PUMPHOUSE

48" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

(1) 2.50" Standard Capacity

SPEEDLAYS

Speedlays Not Required

GENERATOR

Generator Not Required

Foam System

Husky 3 Foam System

Foam Cell


25 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSHHAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- FOUR ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
- ONE 120V RECEPTACLE LOCATED PER SHOP ORDER
- FOUR FLOOR MOUNTED TRAYS LOCATED IN COMPARTMENT PER SHOP ORDER
- ONE HANNAY BOOSTER REEL (MODEL EF34-23-24) FOR 200' OF 1.00" HOSE LOCATED IN B1
- PROVISIONS FOR FRONT INLET

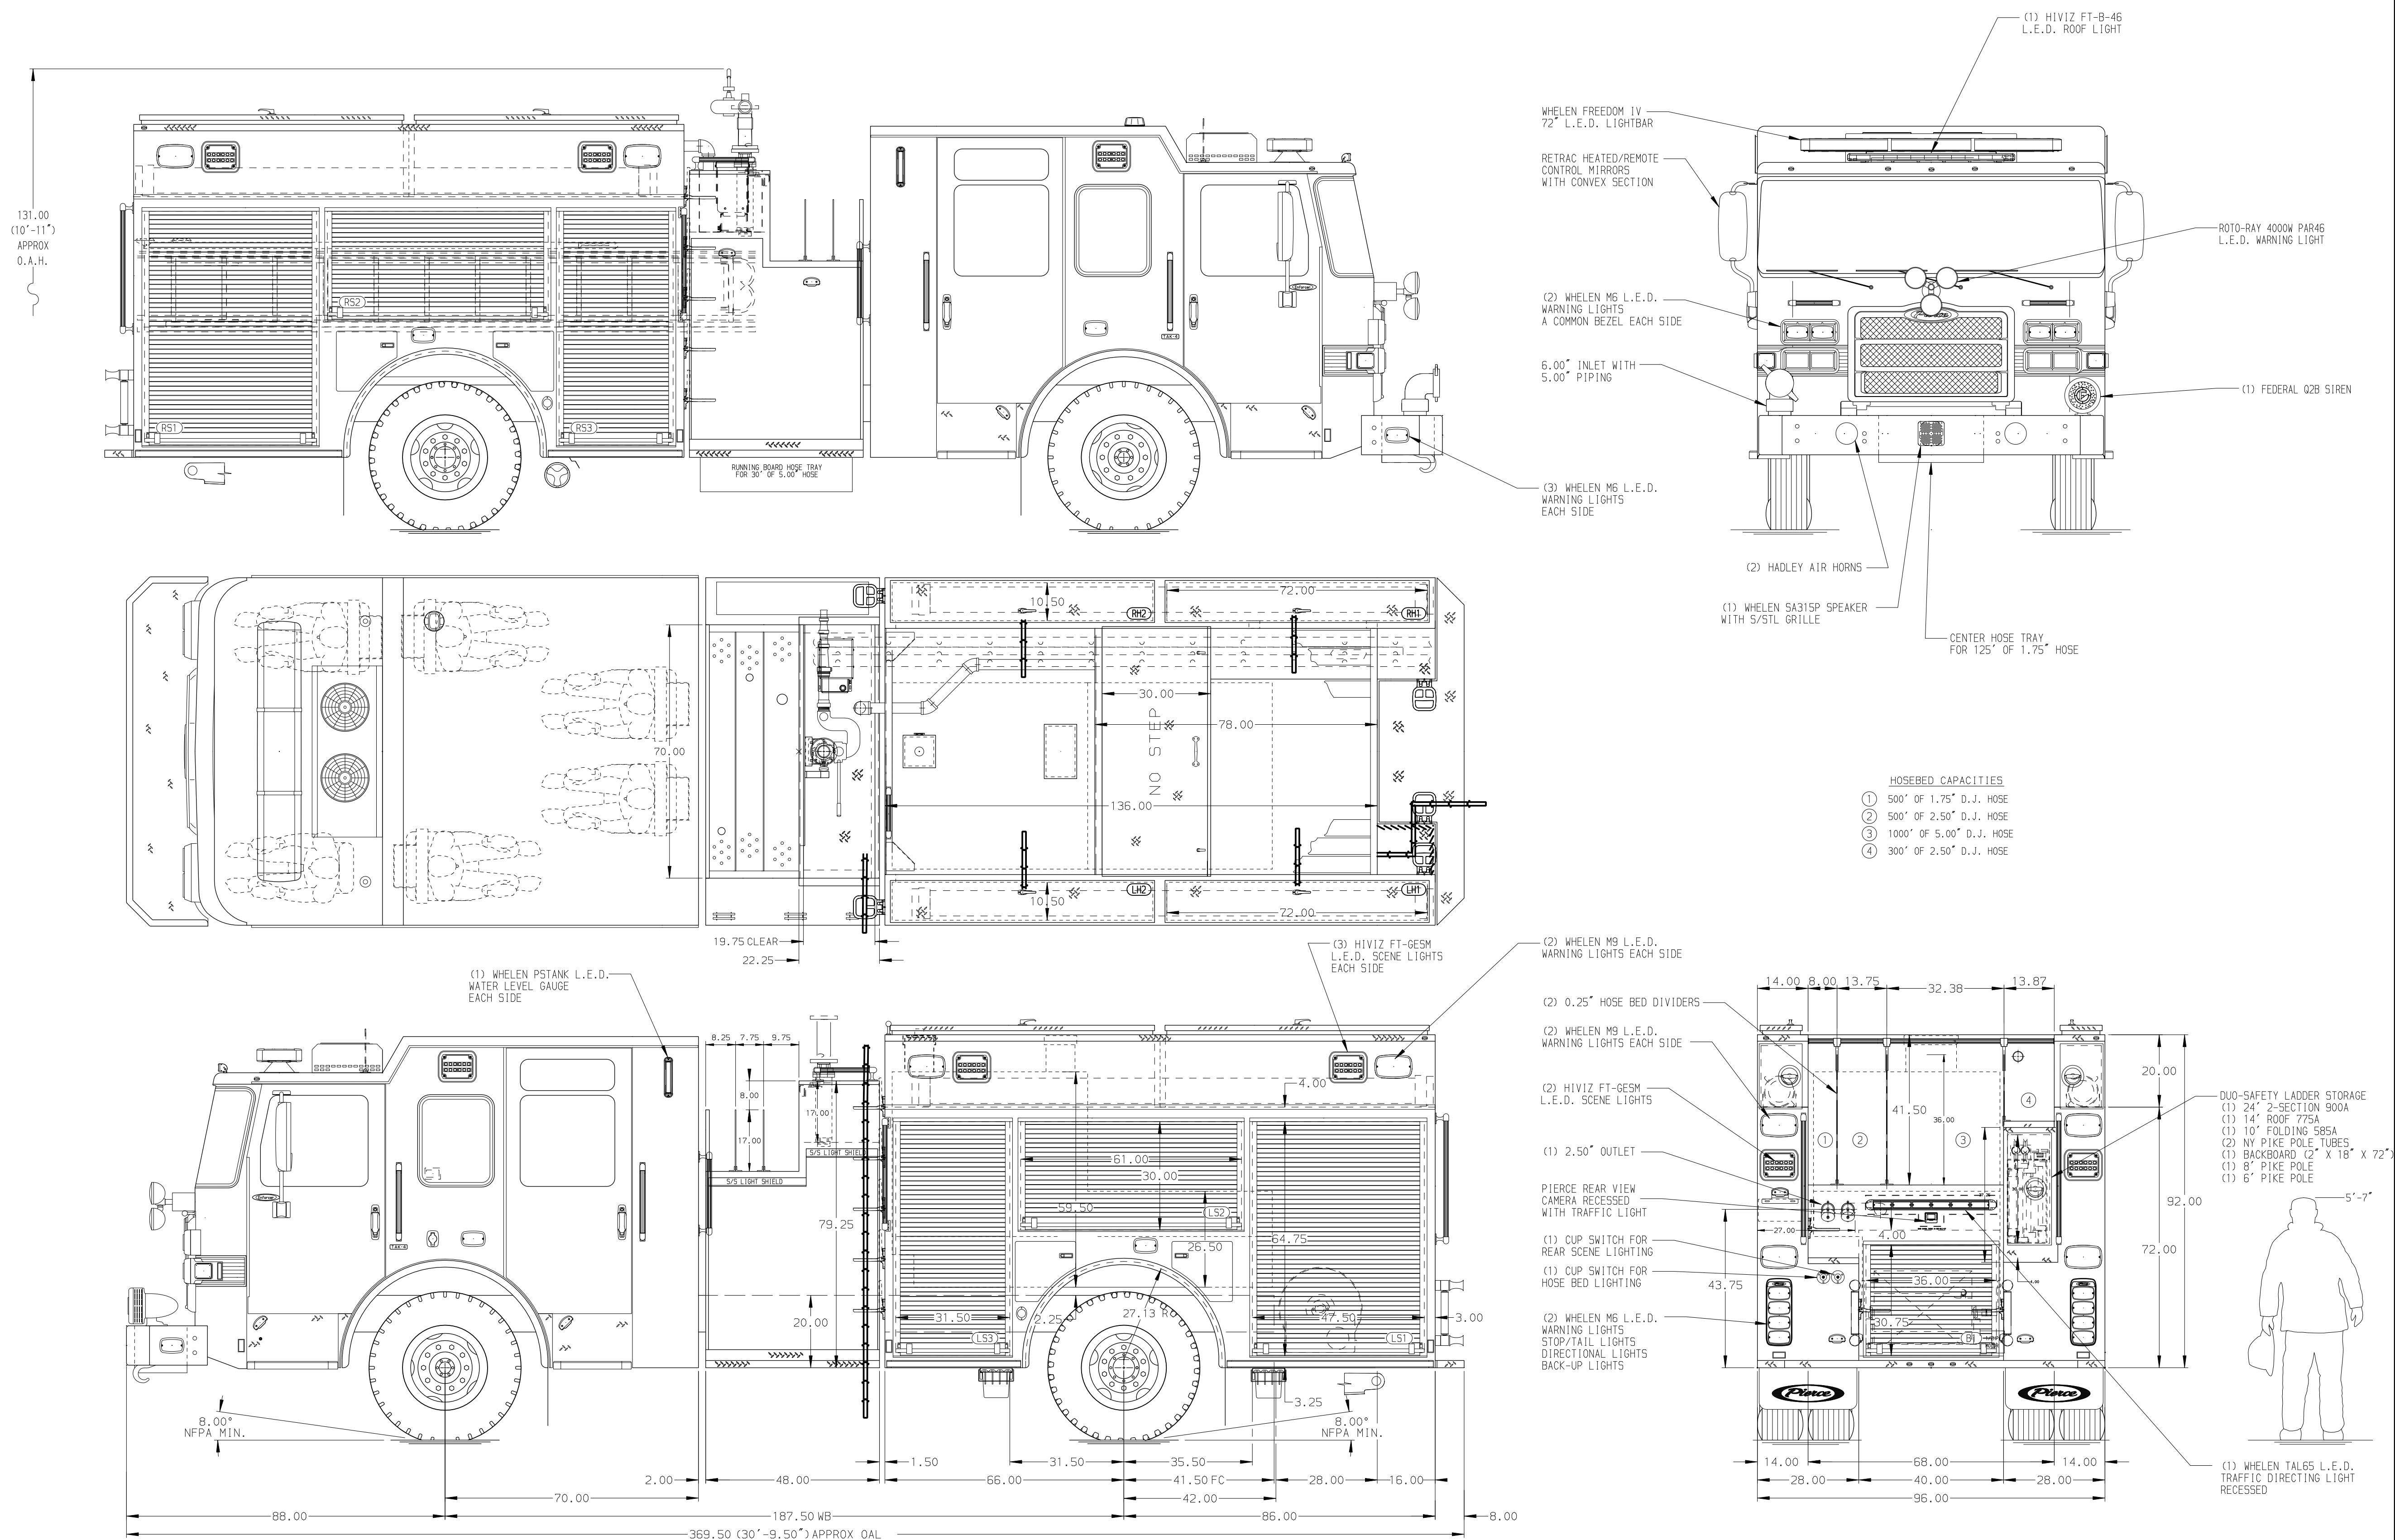

CUSTOMER APPROVAL

APPROVED BY: _____
DATE: _____



JOB NO. 44889

SCALE 1:24 DATE

170C125	MMF	AST	PIERCE	TITLE	Pierce Pumper Approval Drawing
22SEP25	MMF	AST	MODEL	FOR	Pierce Stock Field Unit
REV	DATE	BY	CH	DWG NO.	44889AD

DRAWN BY	MMF	03SEP25
CHECKED BY	AST	4SEP25
SHEET SIZE	D	SHEET NO. 1 OF 1