
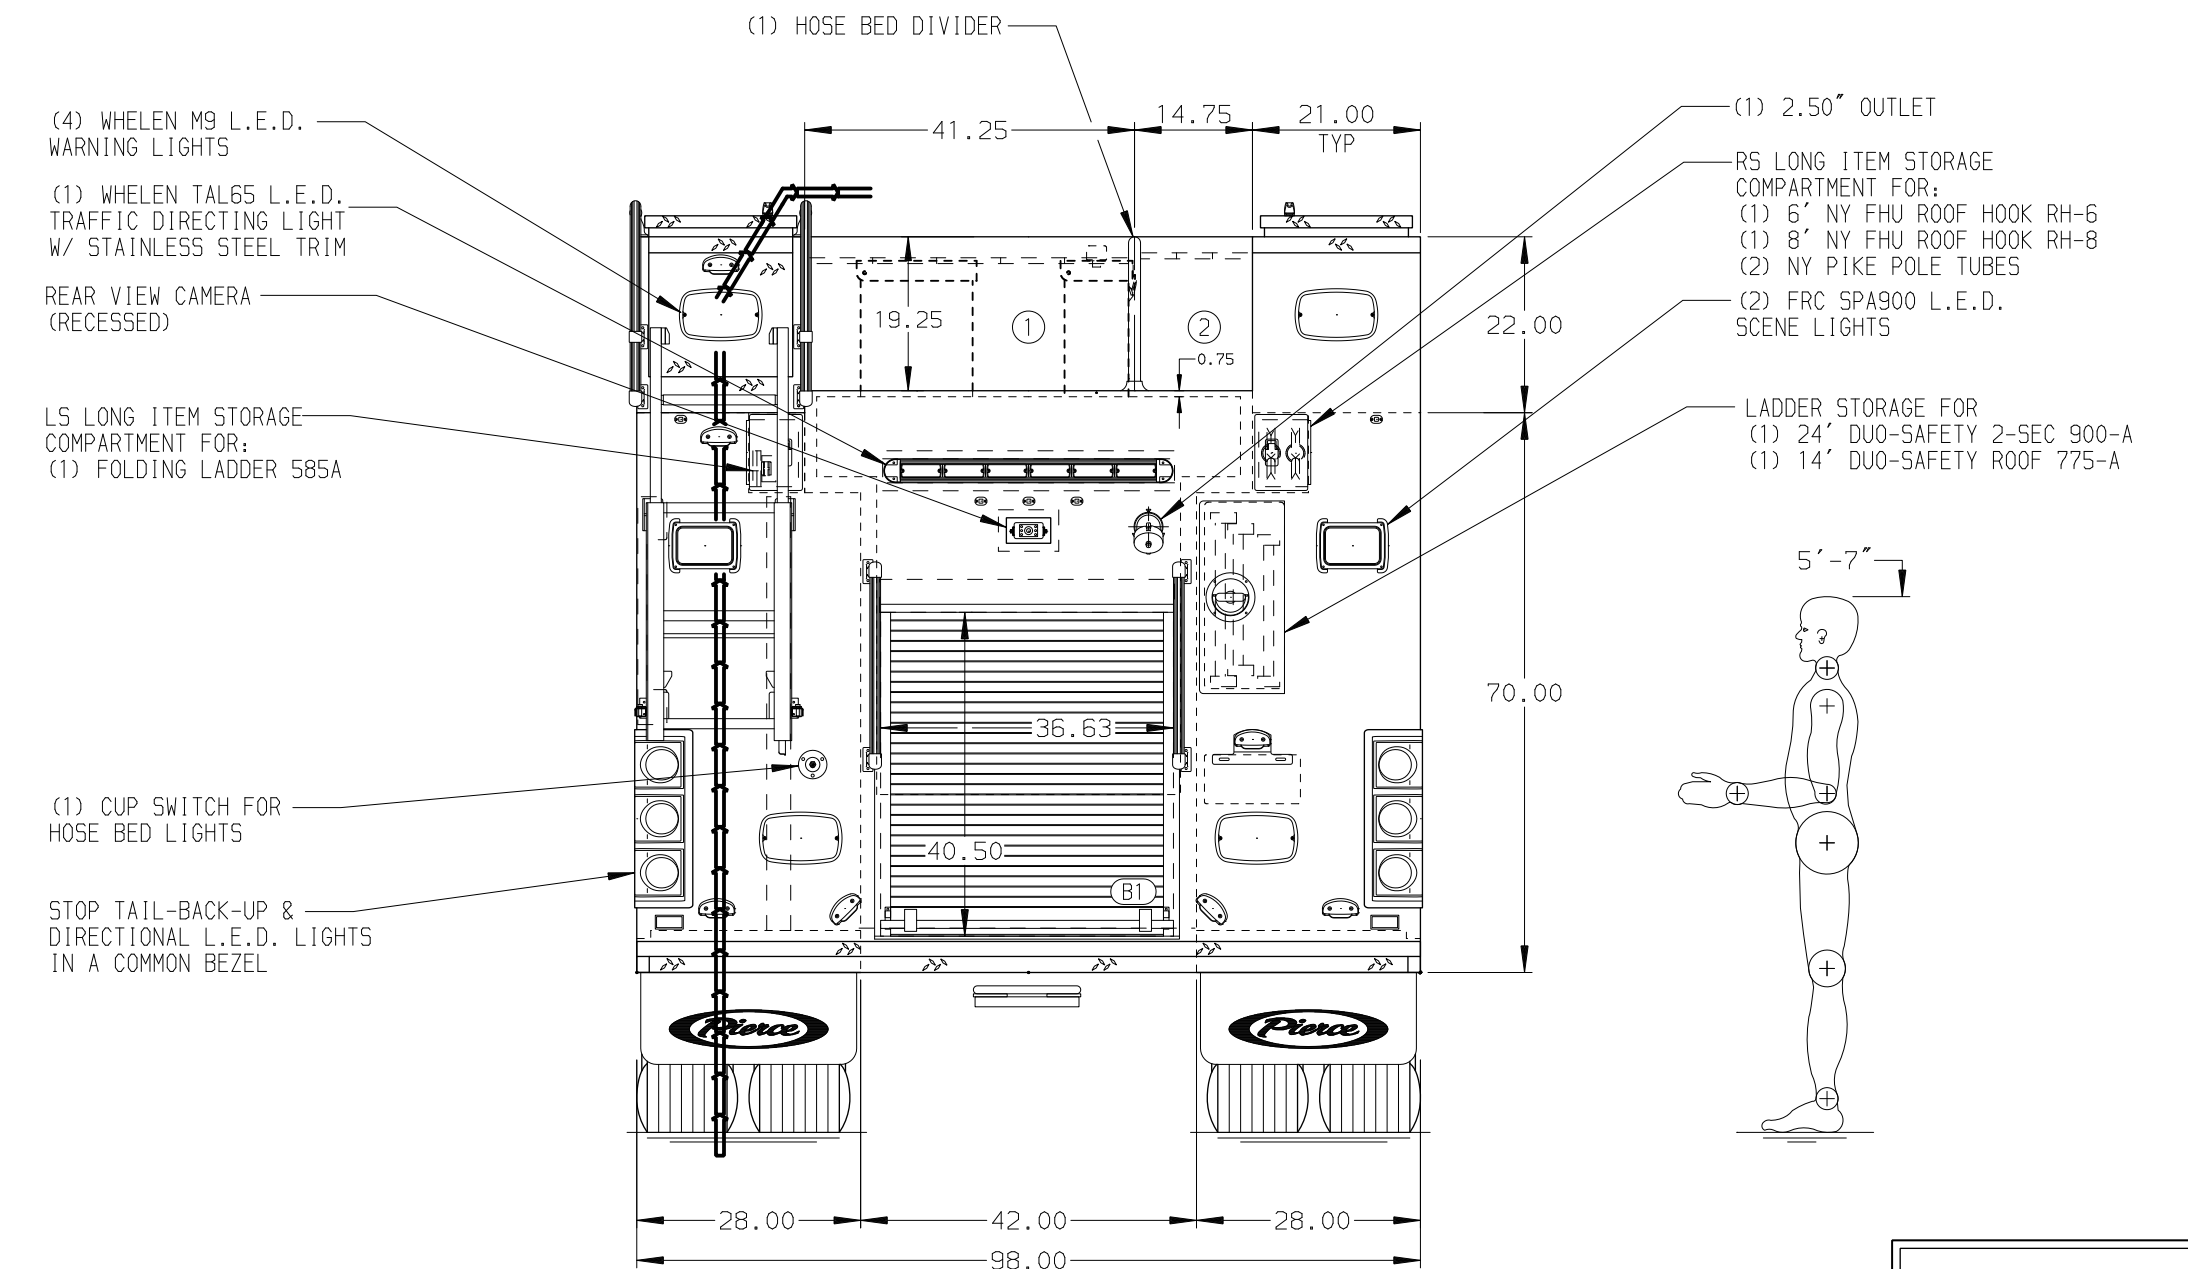


HOSEBED CAPACITIES

① - 1000' OF 5.00" D.J. POLY HOSE

② - 600' OF 2.50" D.J. POLY HOSE

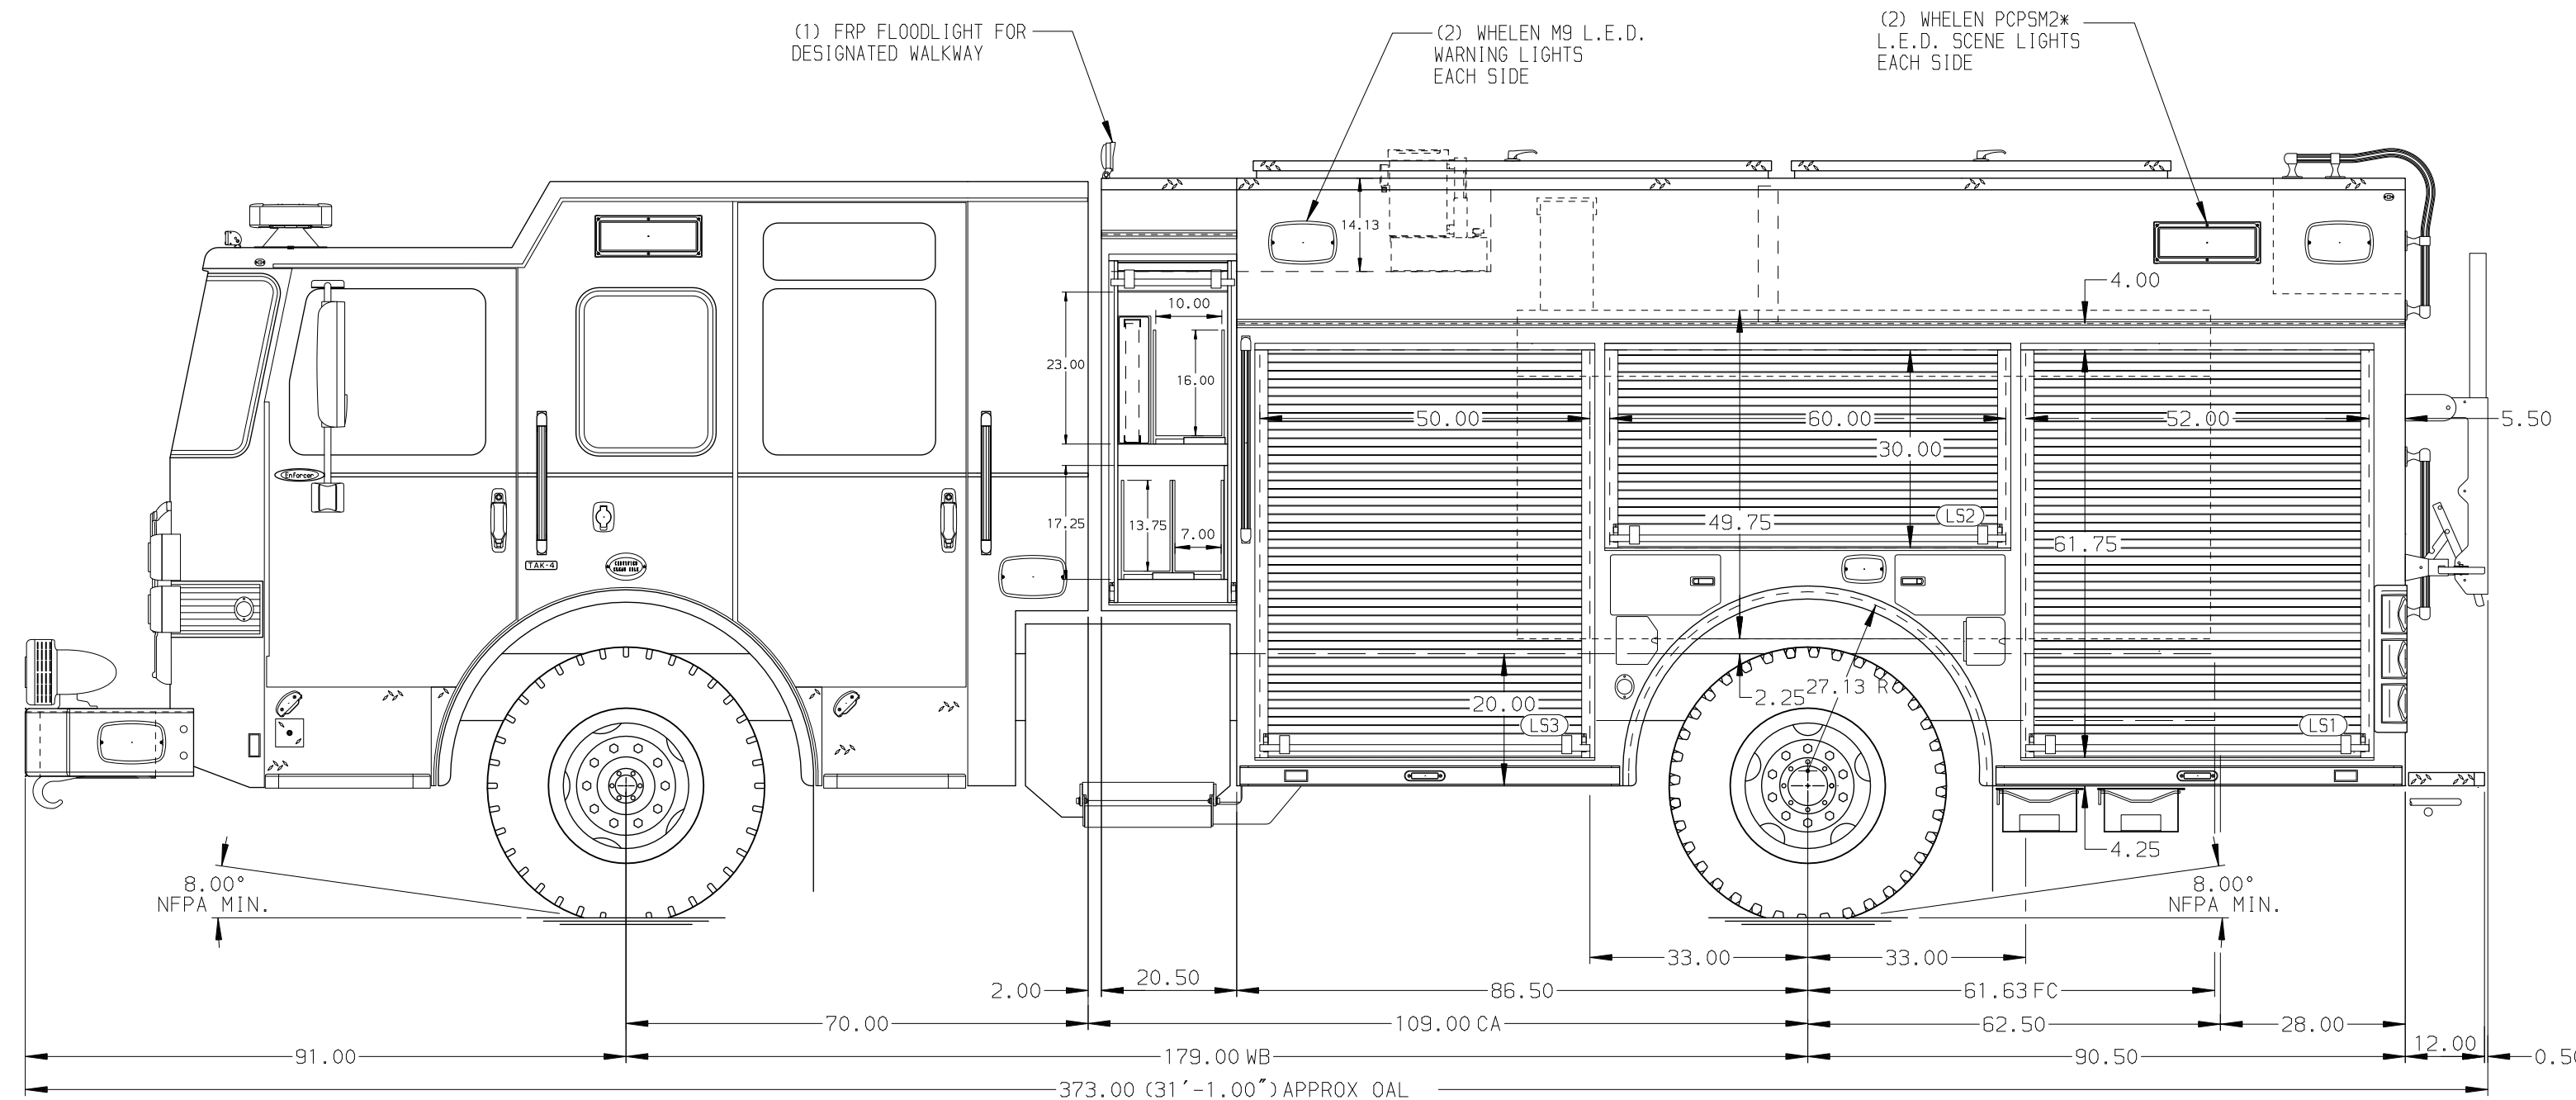

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHOULDER RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING RECESSED IN DRIVER'S CAB STEP WELL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF CAB

CUSTOMER APPROVAL

APPROVED BY: _____
DATE: _____



REV	DATE	BY	CH	ENFORCER
18DEC25		MMF	AST	

TITLE: 2000 GPM, 780G TANK, 750G WATER, 30G FOAM 177" PUC PUMPER, MUX

FOR: PIERCE STOCK FIELD PIERCE MANUFACTURING INC.

DWG NO.: 45098AD

NFPA 1900 (2024) COMPLIANT

JOB NO.	45098
SCALE	1:24
DATE	
DRAWN BY	MMF
CHECKED BY	AST
SHEET SIZE	D
SHEET NO.	1 OF 1