



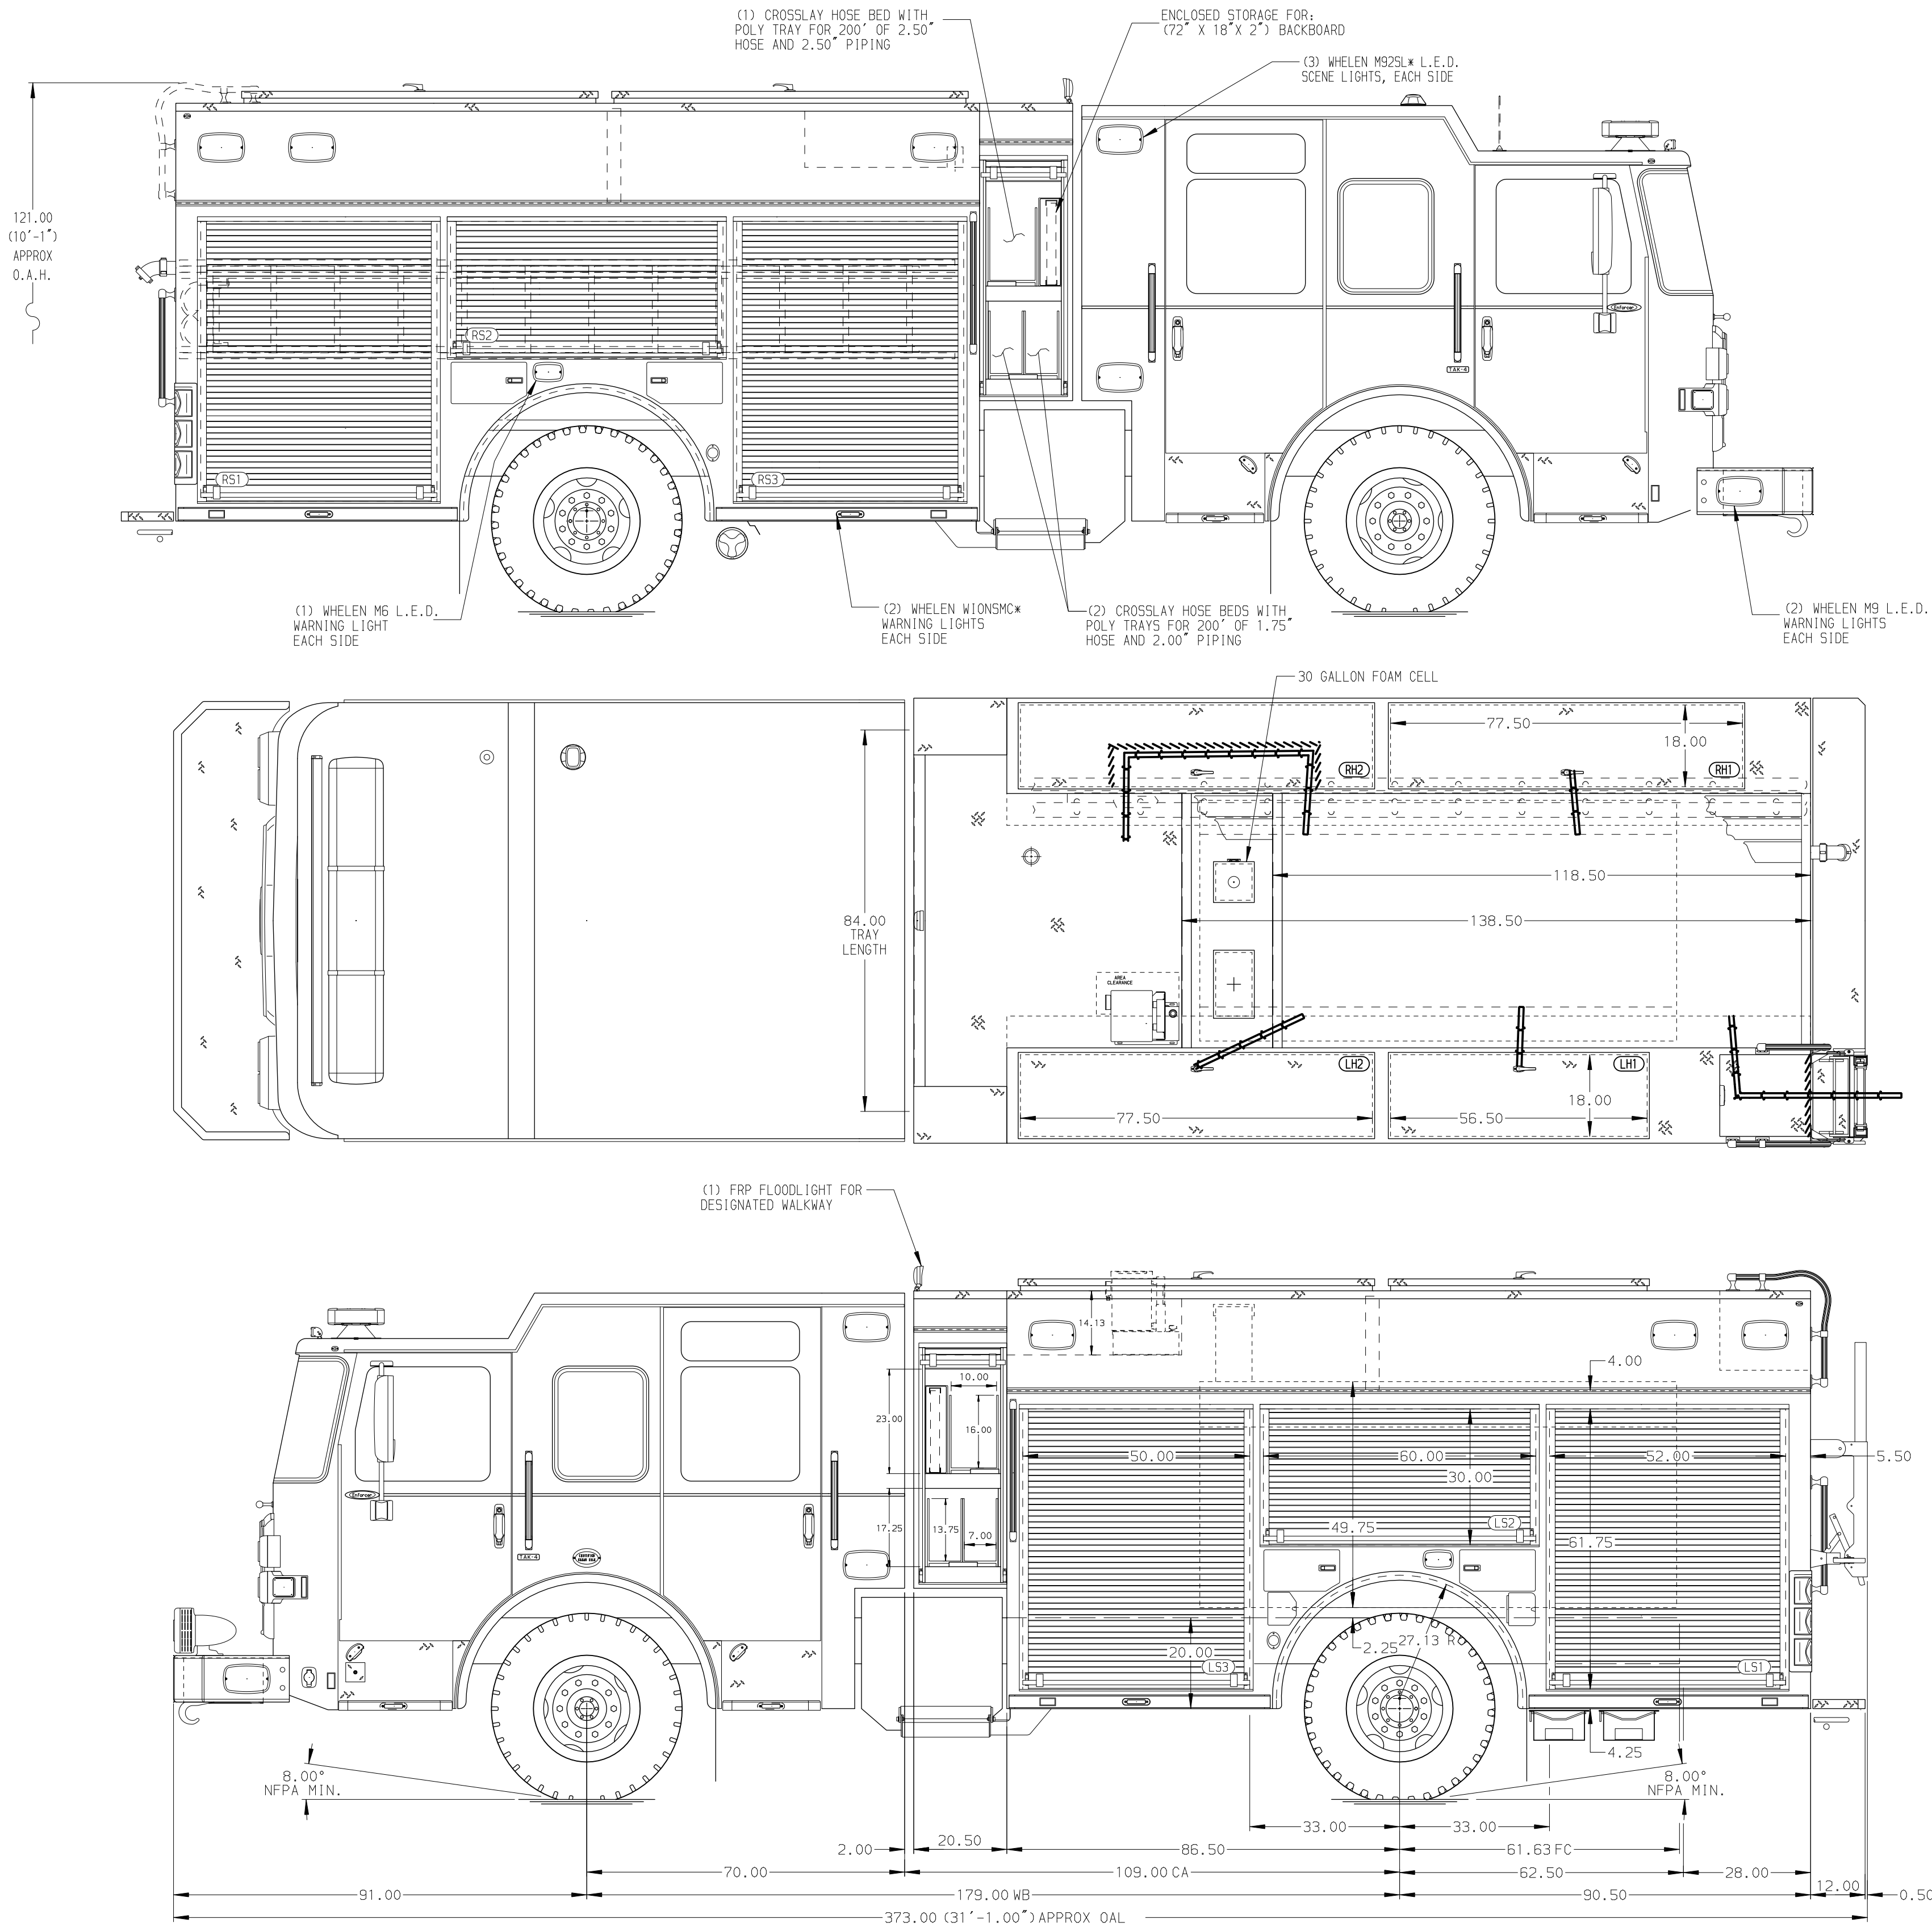

HOSEBED CAPACITIES

① - 1000' OF 5.00" D.J. POLY HOSE

② - 600' OF 2.50" D.J. POLY HOSE

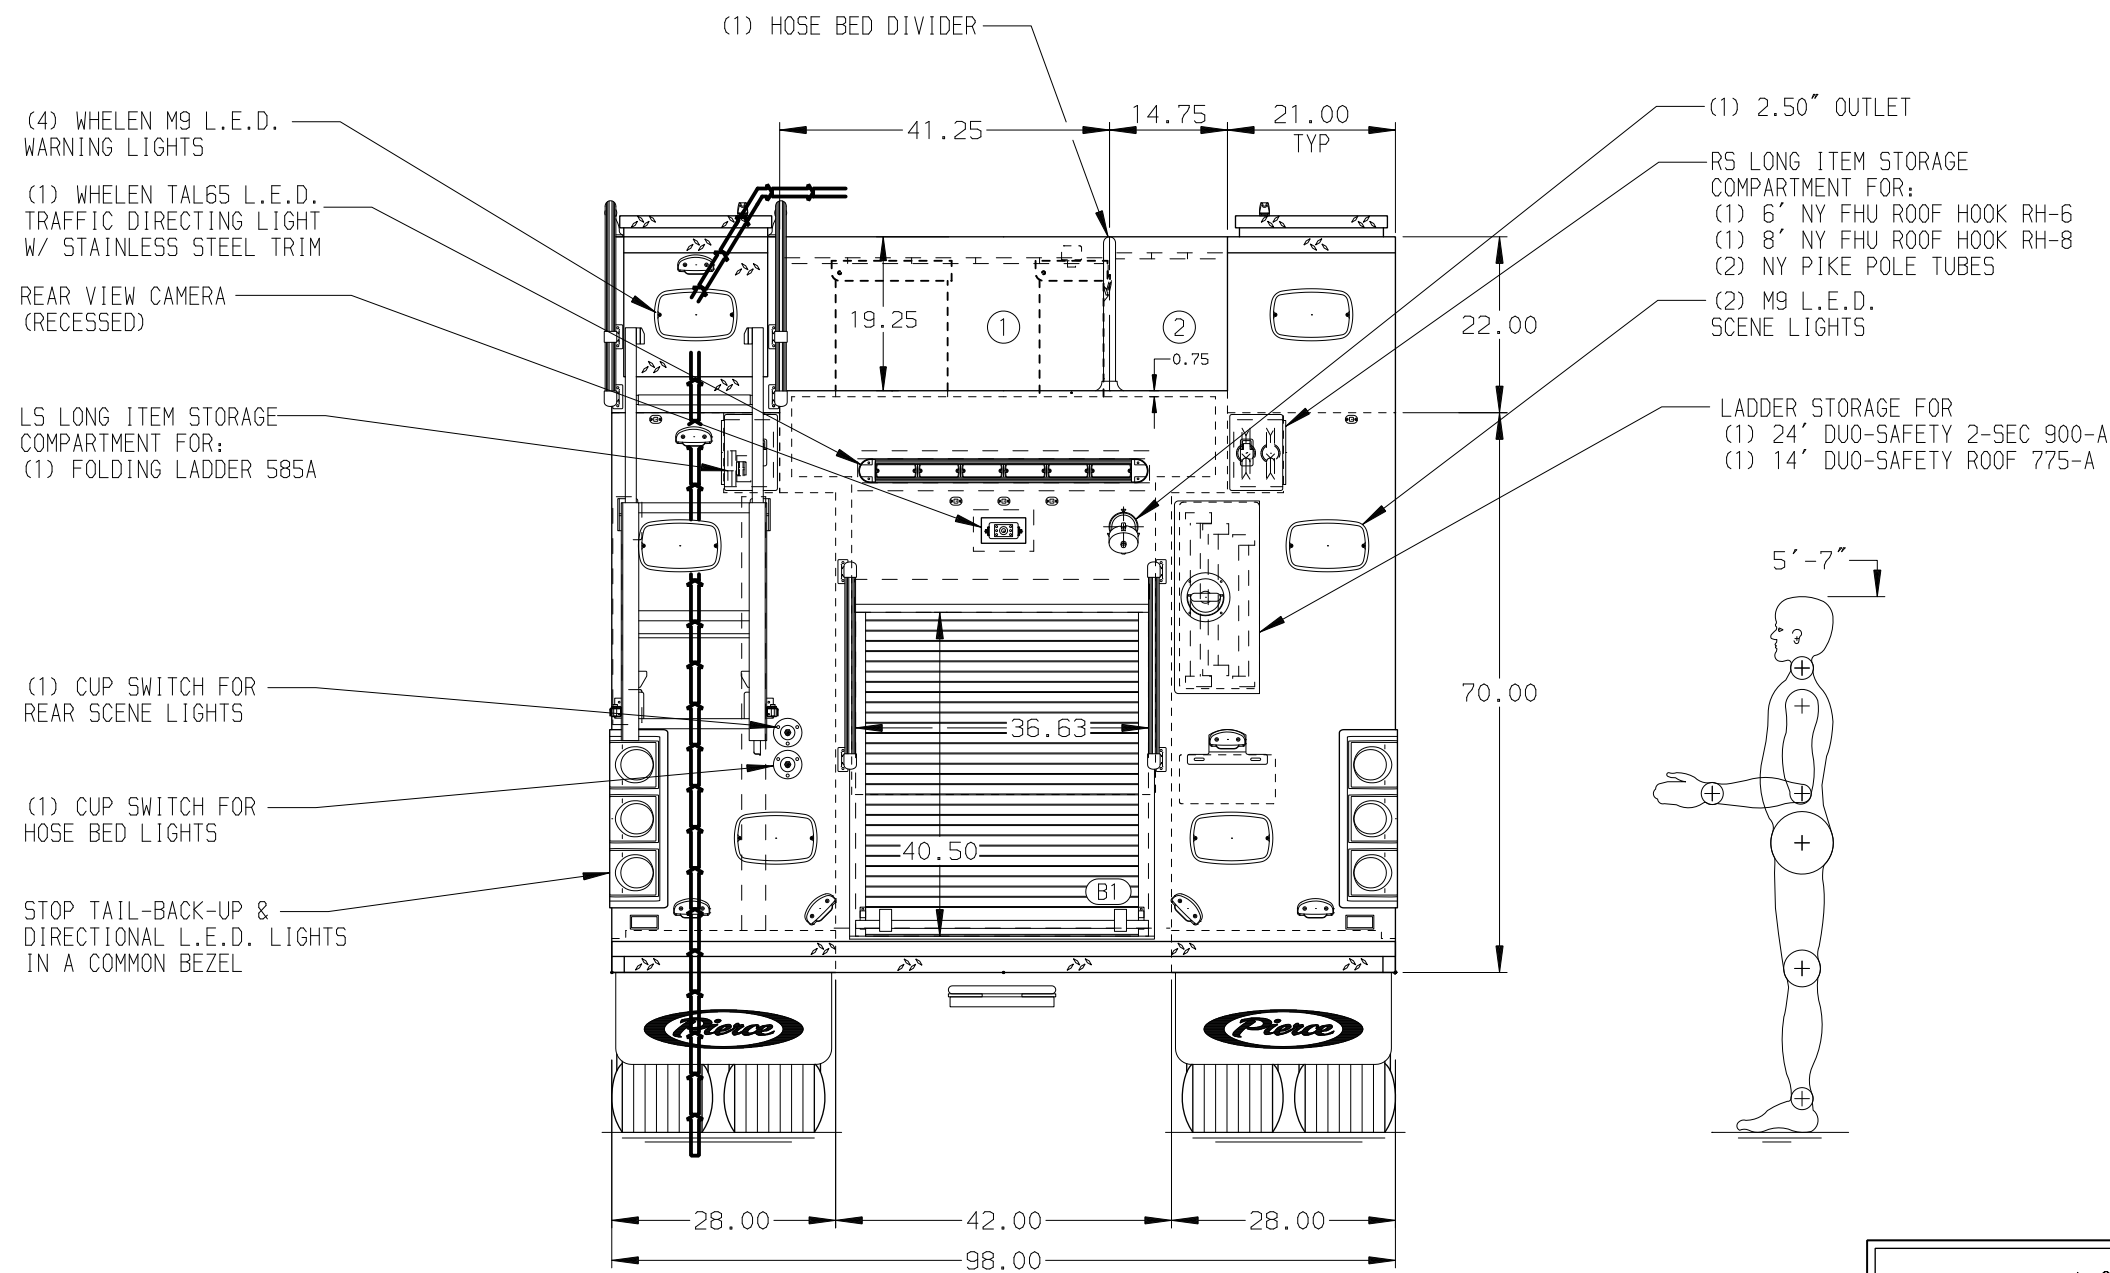

NFPA 1900  
(2024)  
COMPLIANT

## ALUMINUM BODY

### NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING RECESSED IN DRIVER'S CAB STEP WELL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER SIDE OF CAB

### CUSTOMER APPROVAL

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

|     |      |    |    |              |                                           |
|-----|------|----|----|--------------|-------------------------------------------|
|     |      |    |    | CHASSIS DATA | TITLE                                     |
|     |      |    |    | MAKE         | 2000 GPM, 780G TANK, 750G WATER, 30G FOAM |
|     |      |    |    | PIERCE       | 177" PUC PUMPER, MUX                      |
|     |      |    |    | MODEL        | FOR PIERCE STOCK FIELD                    |
|     |      |    |    | ENFORCER     | PIERCE MANUFACTURING INC.                 |
| REV | DATE | BY | CH |              | DWG NO.                                   |



MANUFACTURING INC.

JOB NO. 45465

SCALE 1:24 DATE

DRAWN BY DLH 16JAN26

CHECKED BY AST 16JAN26

SHEET SIZE D SHEET NO. 1 OF 1

45465AD