


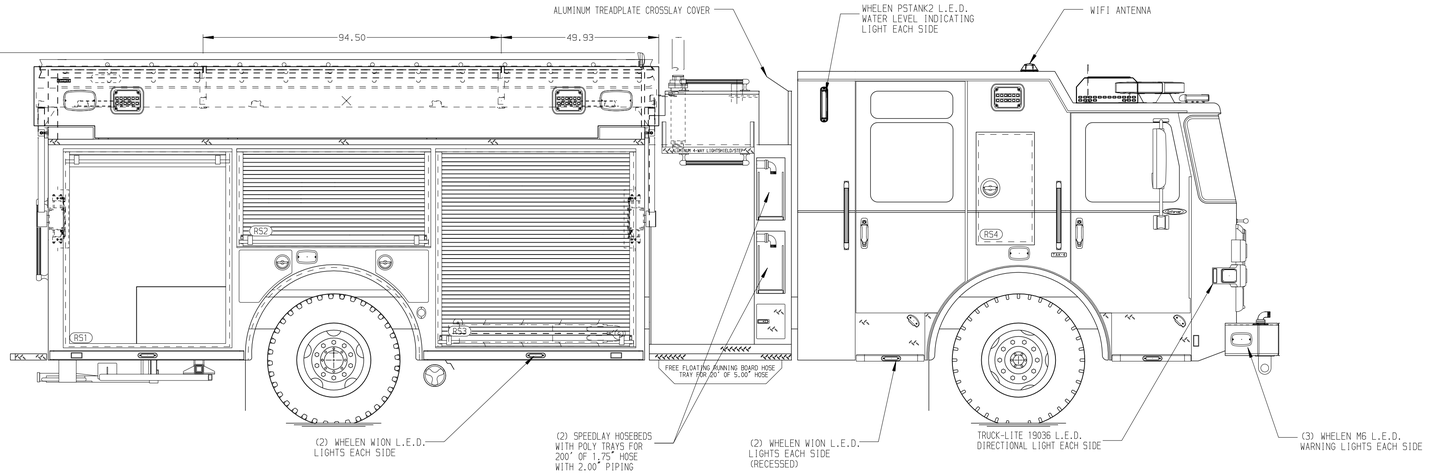


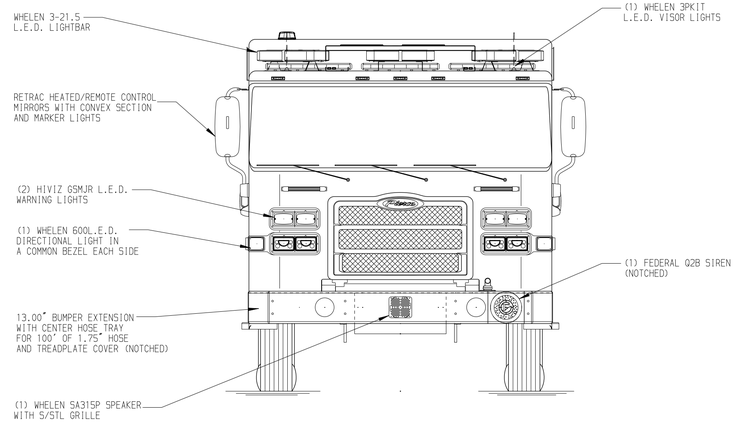


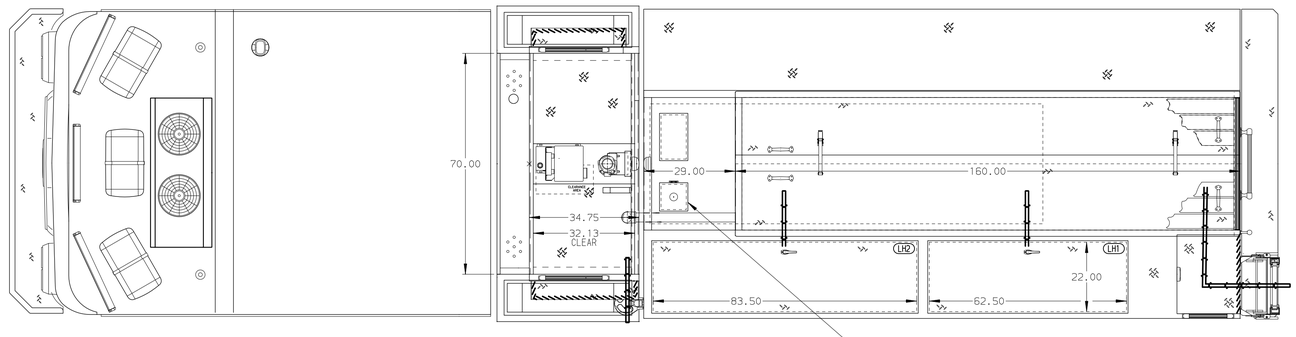

HOSEBED CAPACITIES

① - 600' OF 2.50" D.J. POLY HOSE
② - 1000' OF 5.00" D.J. POLY HOSE

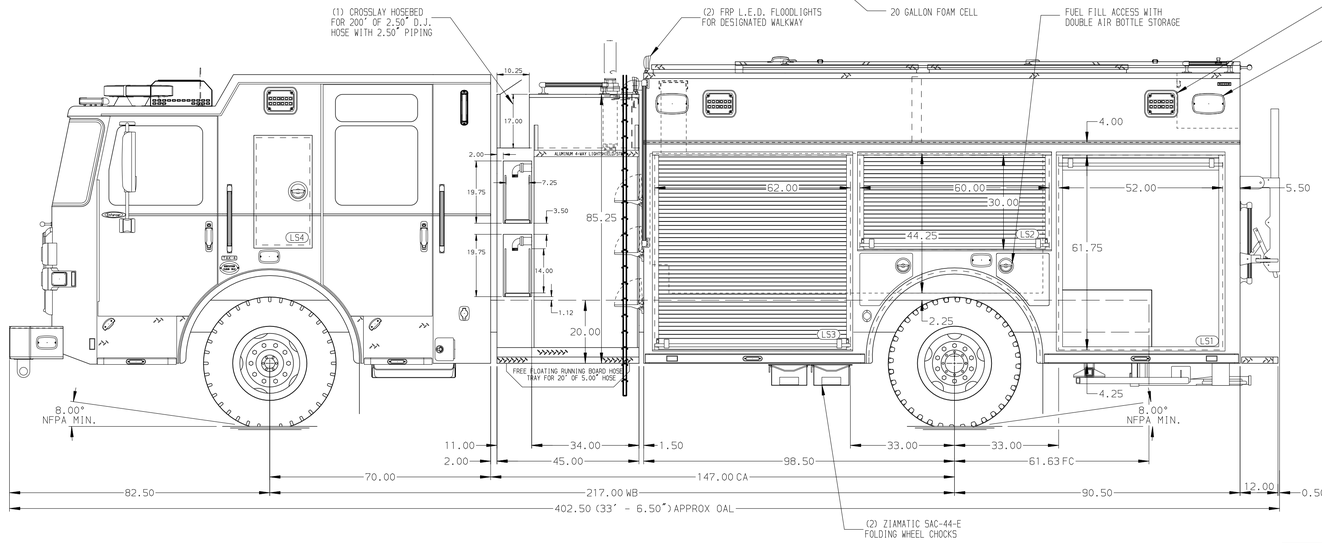

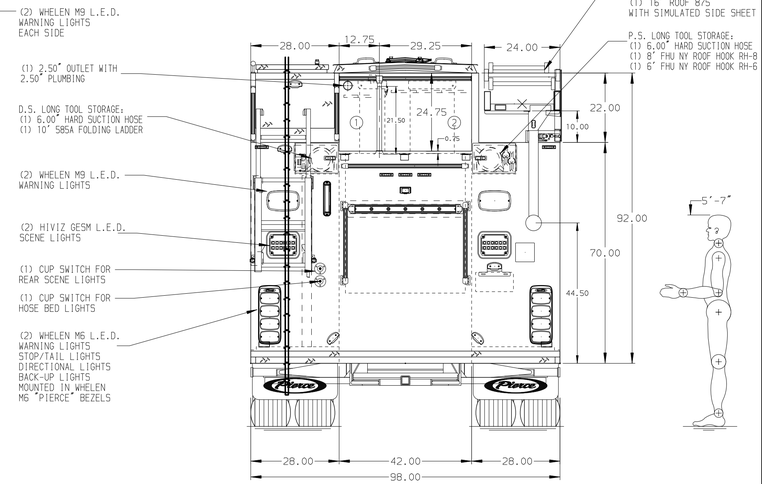

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

Pierce MANUFACTURING INC.

JOB NO.	45552
SCALE	1:24
DATE	
DRAWN BY	AMI
DATE	06FEB26
CHECKED BY	WME
DATE	6FEB26
SHEET SIZE	D
SHEET NO.	1 OF 2

REV	DATE	BY	CH
2	21APR26	AMI	WME
1	10MAR26	DLH	WME

CHASSIS DATA

MAKE: PIERCE

MODEL: ENFORCER

TITLE: 1500 GPM, 770G TANK, 750G WATER, 20G FOAM
189" HDRP, MUX

FOR: WILLIAMSTOWN VOLUNTEER FIRE COMPANY
WILLIAMSTOWN, WEST VIRGINIA

DWG NO. 45552AD-SH1

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING LOCATED PER SHOP ORDER
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. BATTERY CHARGE INDICATOR LOCATED PER SHOP ORDER

View File Created 23-APR-2026 07:10:36