

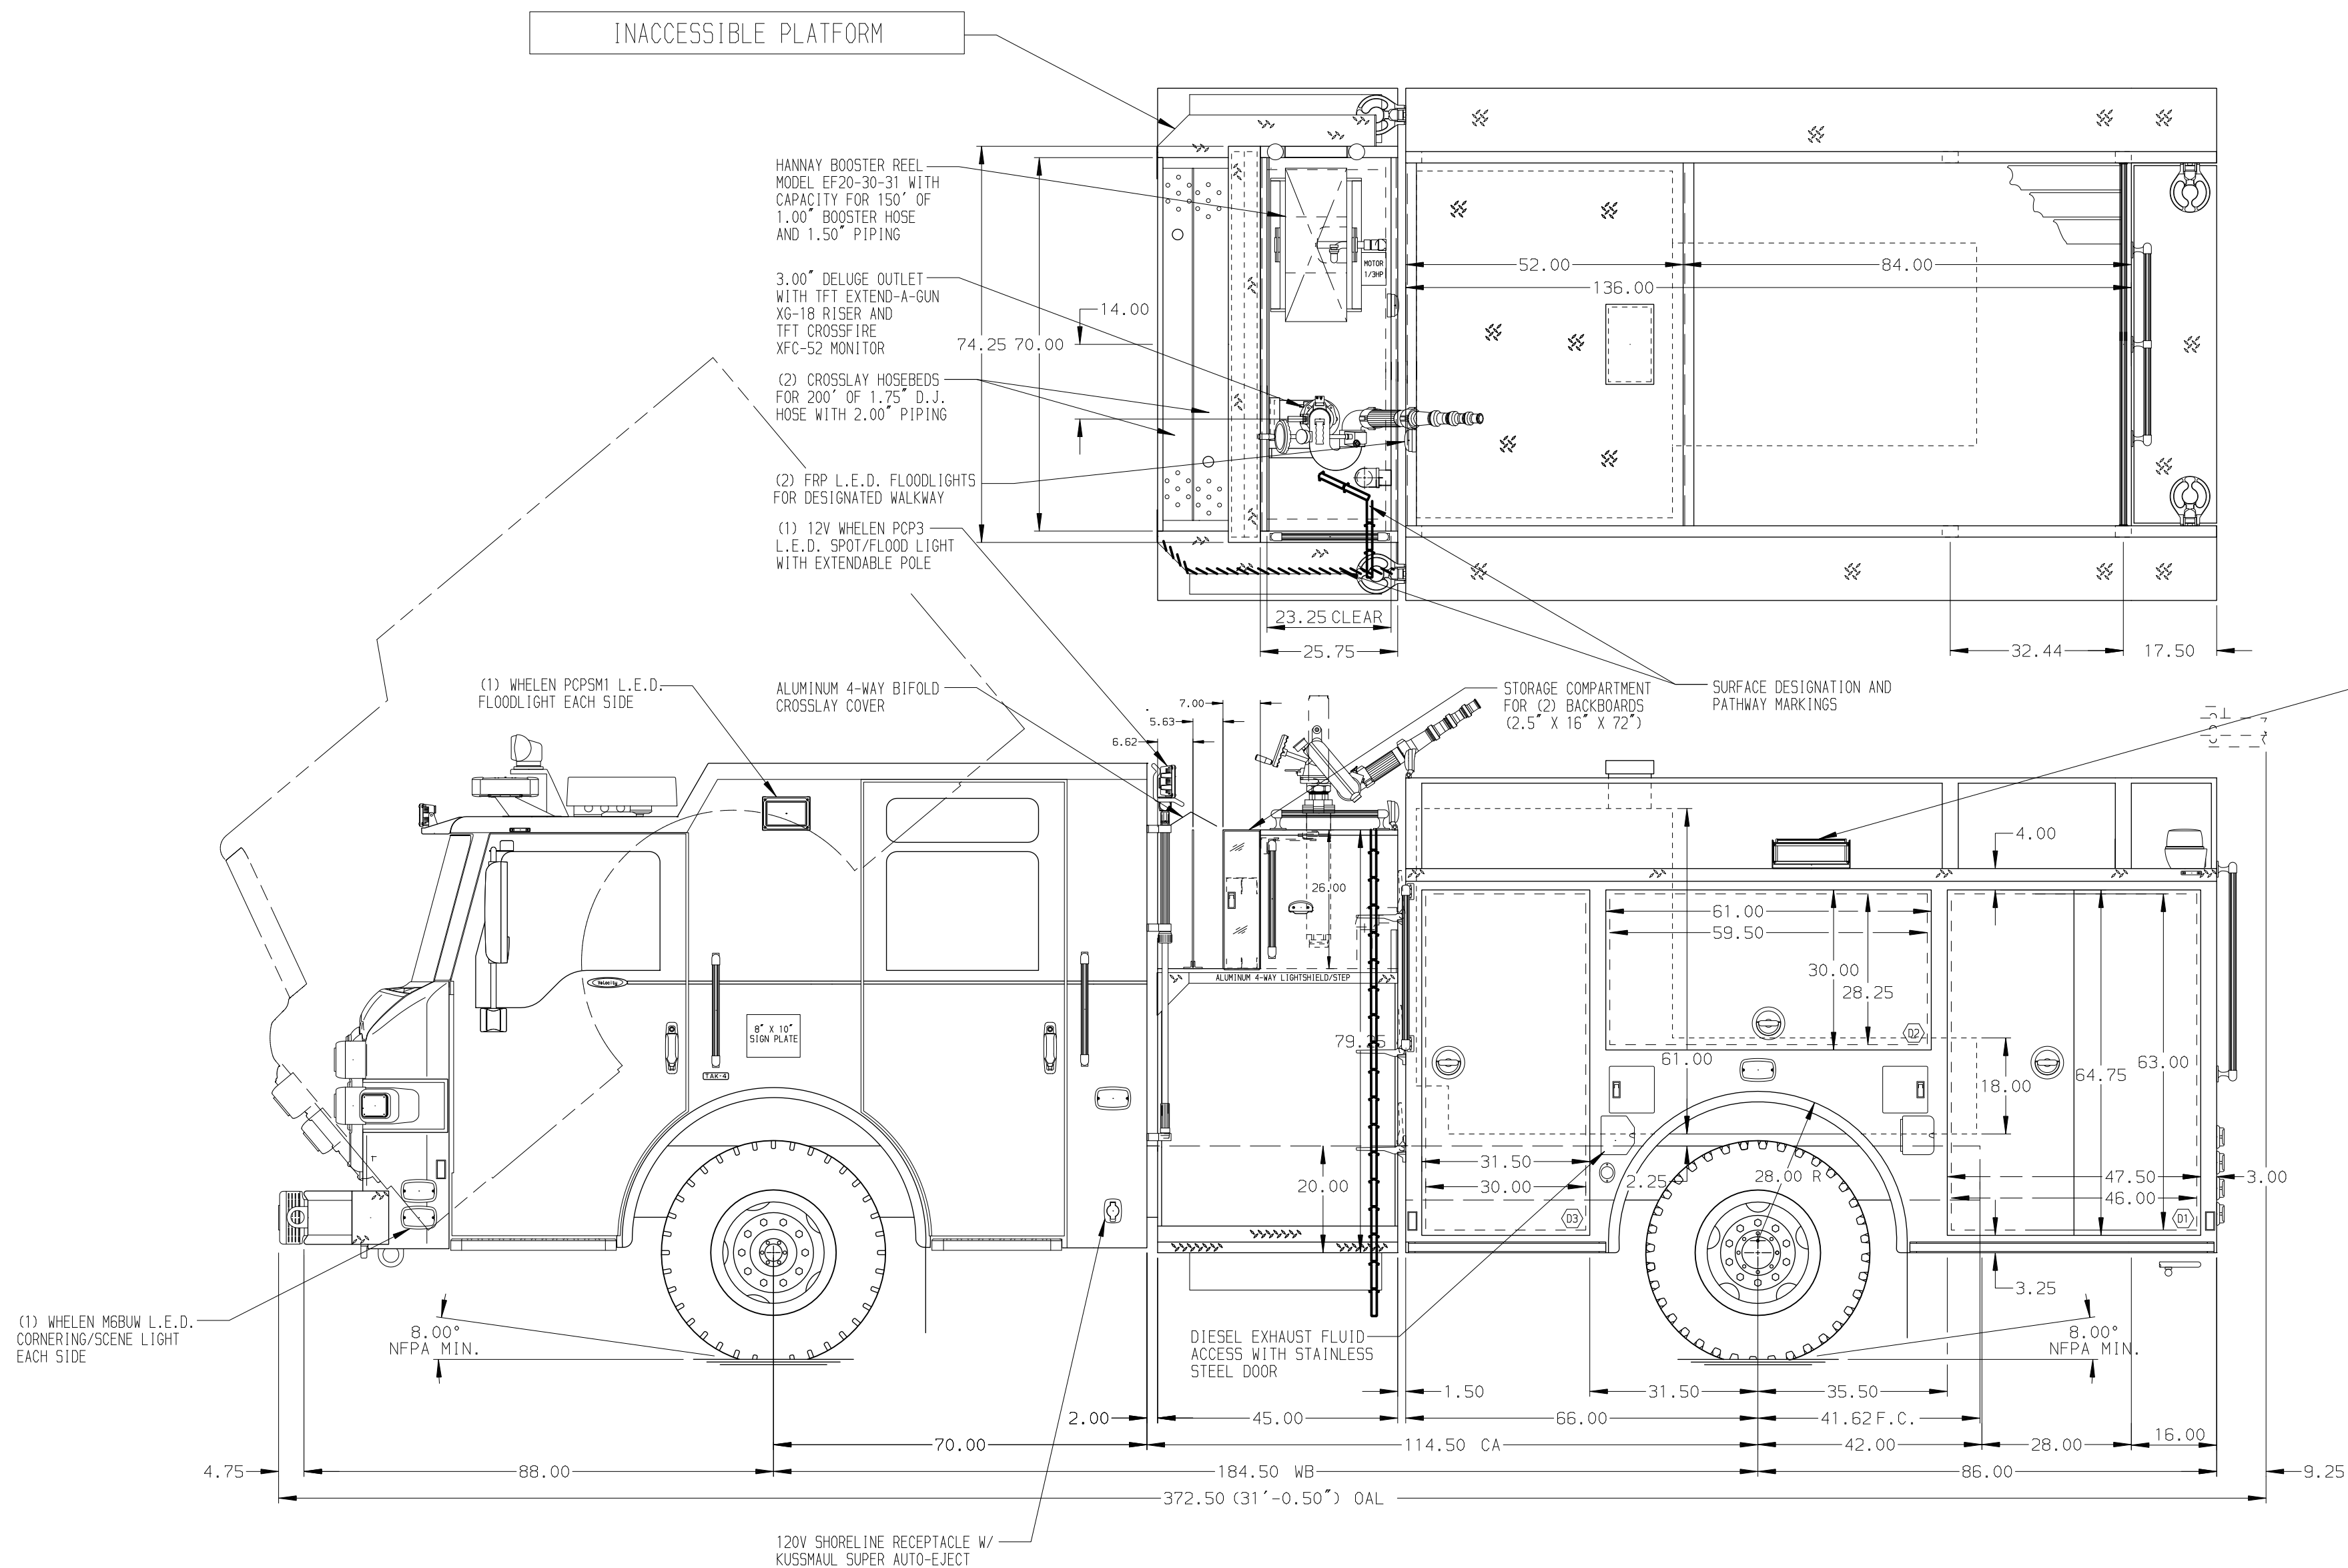
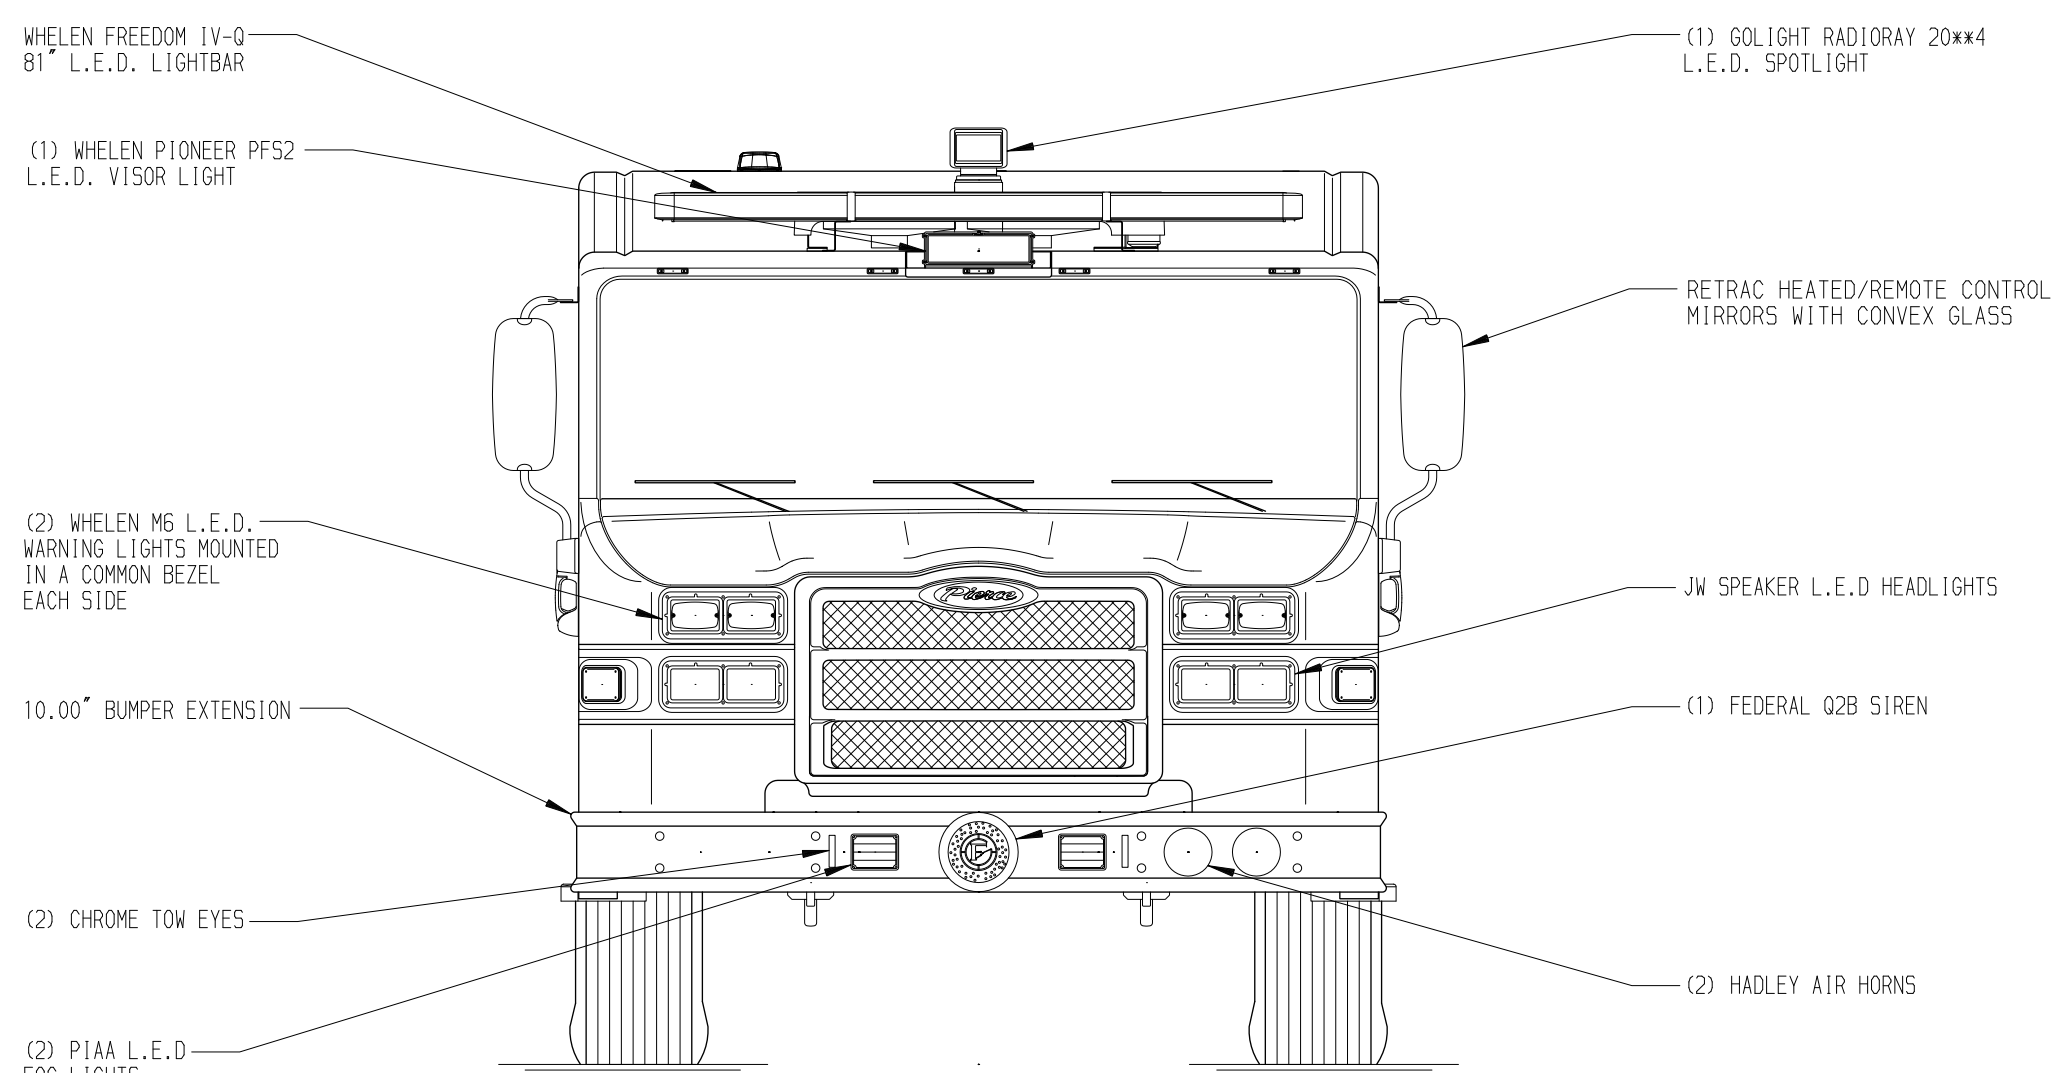


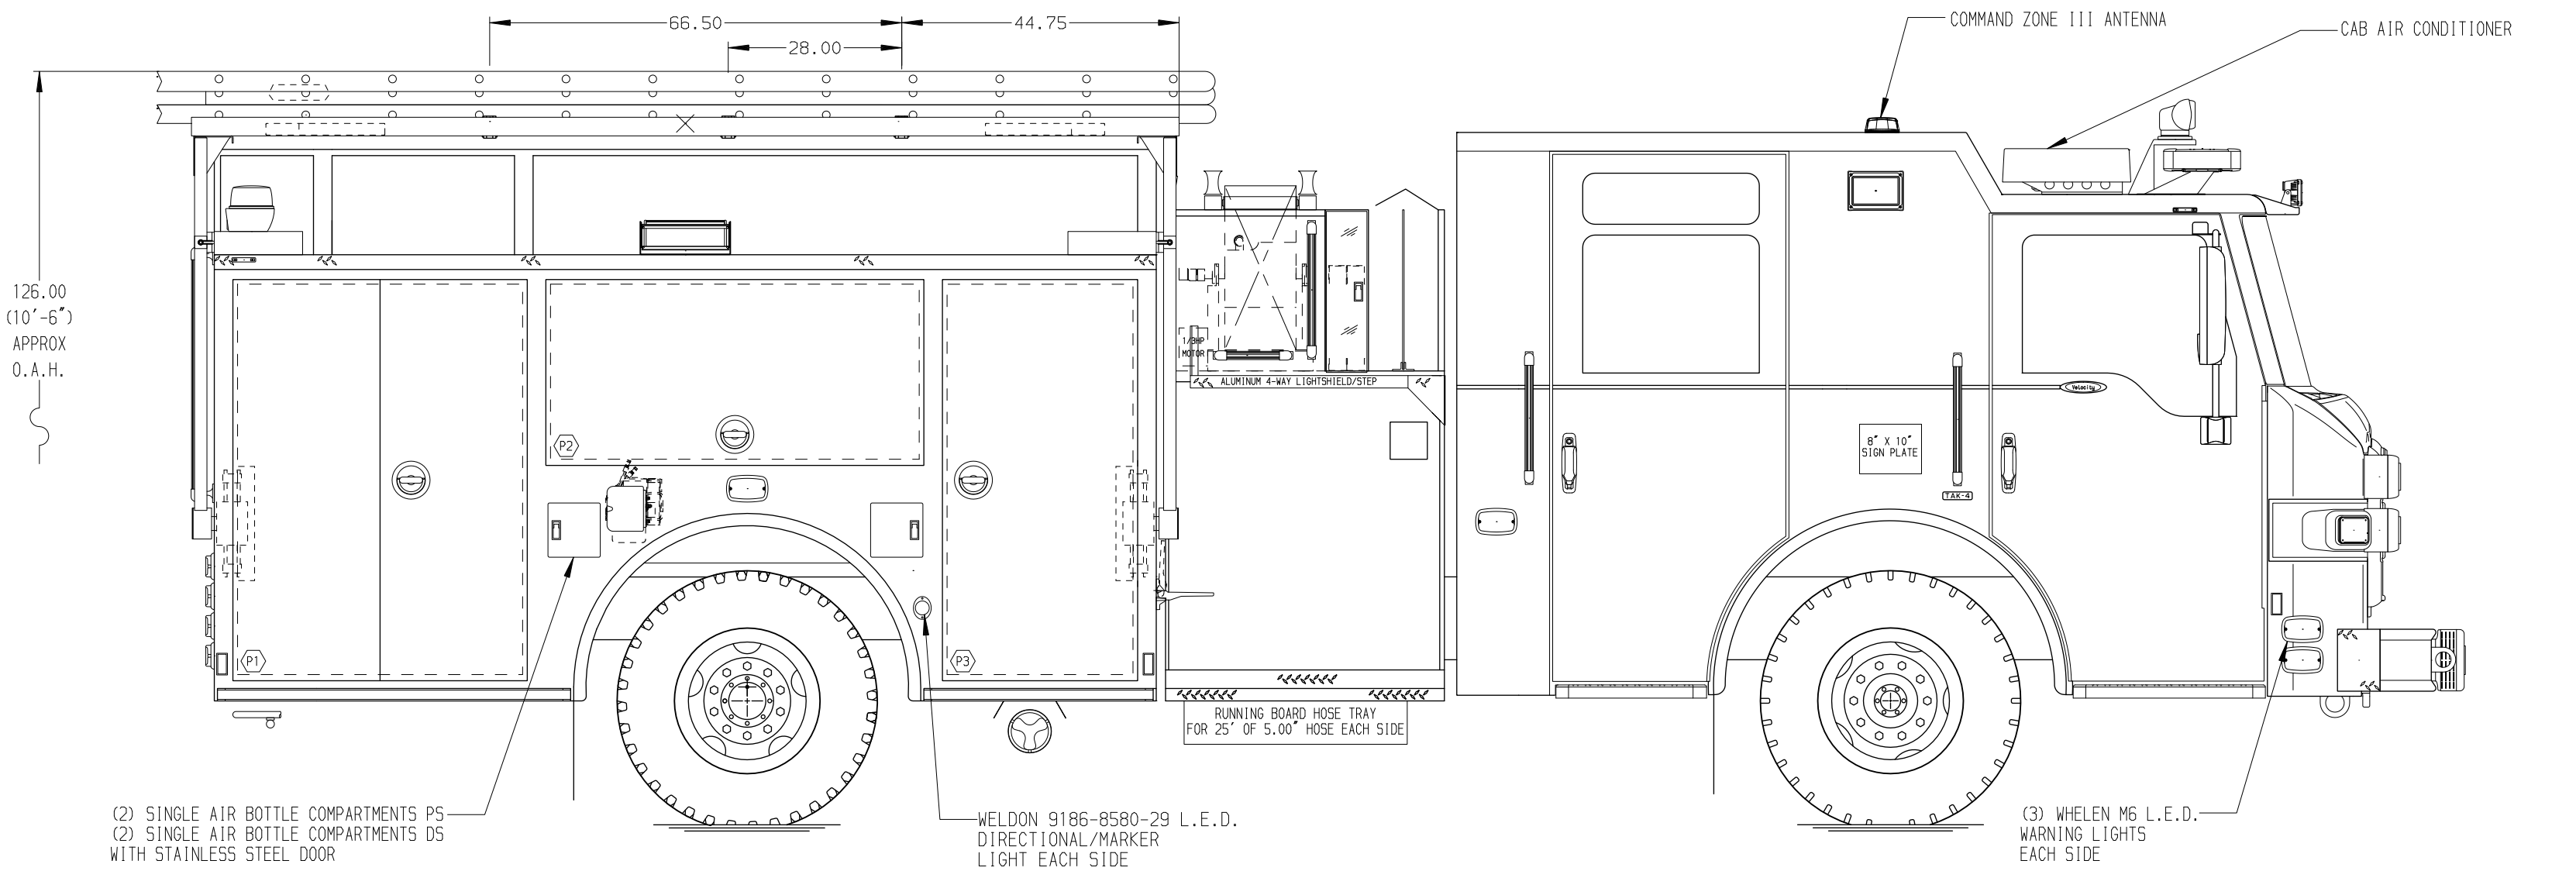

- HOSEBED CAPACITIES
- ① 250' OF 2.50" D.J. HOSE
 - ② 250' OF 1.75" D.J. HOSE
 - ③ 1000' OF 5.00" D.J. HOSE
 - ④ 1000' OF 2.50" D.J. HOSE

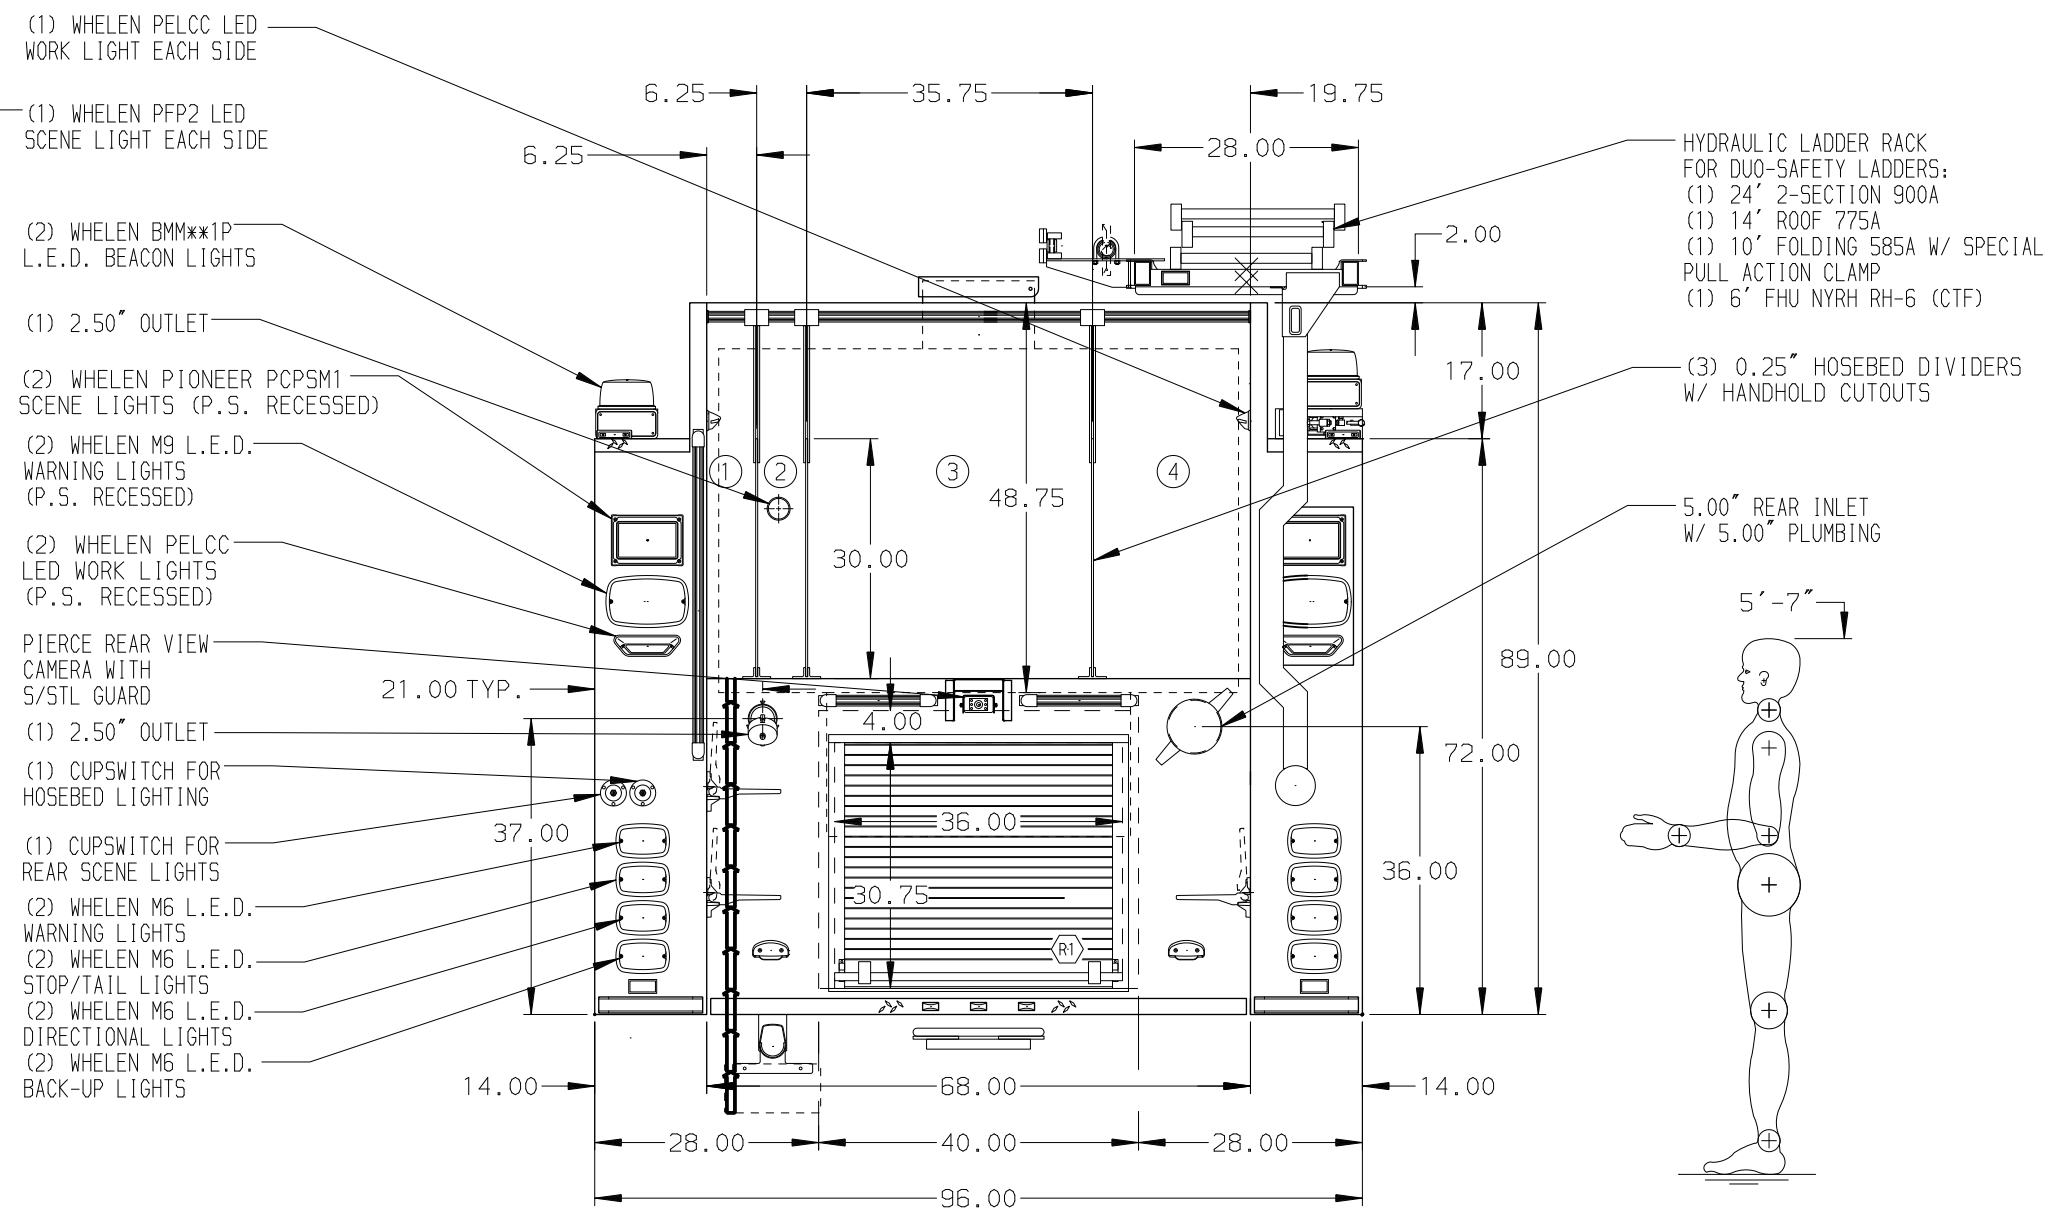

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. CTF WHEEL CHOCKS AND MOUNTING BRACKETS
- 2. BATTERY CHARGER LOCATED IN COMPARTMENT D3
- 3. BATTERY CHARGE INDICATOR LOCATED ON D.S. SEAT RISER WITH BRACKET
- 4. ONE ADJUSTABLE SHELF (FULL DEPTH/FULL WIDTH) IN COMPARTMENTS D1, D2, & P2 TWO IN COMPARTMENTS D3, P1 AND THREE IN COMPARTMENT P3
- 5. AIR INLET W/ DISCONNECT FITTING LOCATED IN D5 STEP WELL
- 6. ONE 120V DUPLEX RECEPTACLE IN EACH BOX AT THE BASE OF THE MAP BOOK HOLDER AND IN D2,D3,R1,P2 AND P3
- 7. ONE FULL WIDTH/DEPTH FLOOR MOUNTED SLIDE OUT TRAY LOCATED IN COMPARTMENT D1



MANUFACTURING INC.

JOB NO.	30535 01-02
SCALE	1:24
DATE	
DRAWN BY	LST
23AUG16	
CHECKED BY	WKL
30AUG16	
SHEET SIZE	D
SHEET NO.	1 OF 1

TITLE	1500-D-750 GAL POLY, 152" BODY, HYDRAULIC LADDER RACK (2) CROSSESLAYS, DELUGE, BOSTER REEL, REAR INLET
FOR	GRESHAM FIRE & EMERGENCY SERVICES GRESHAM, OREGON
DWG NO.	30535AD

CHASSIS DATA	MAKE	PIERCE	MODEL	VELOCITY FR
REV	DATE	BY	CH	
05NOV16	LST	MSA		
14OCT16	LST	MSA		
02SEP16	LST	WKL		