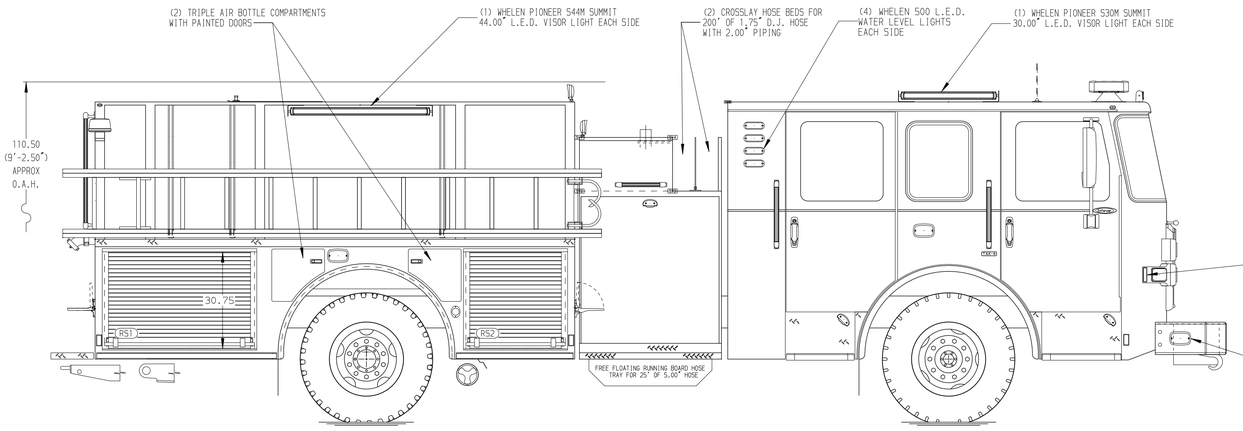

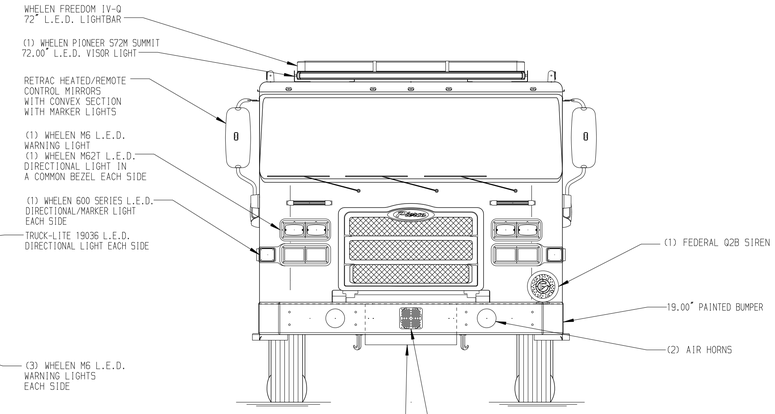

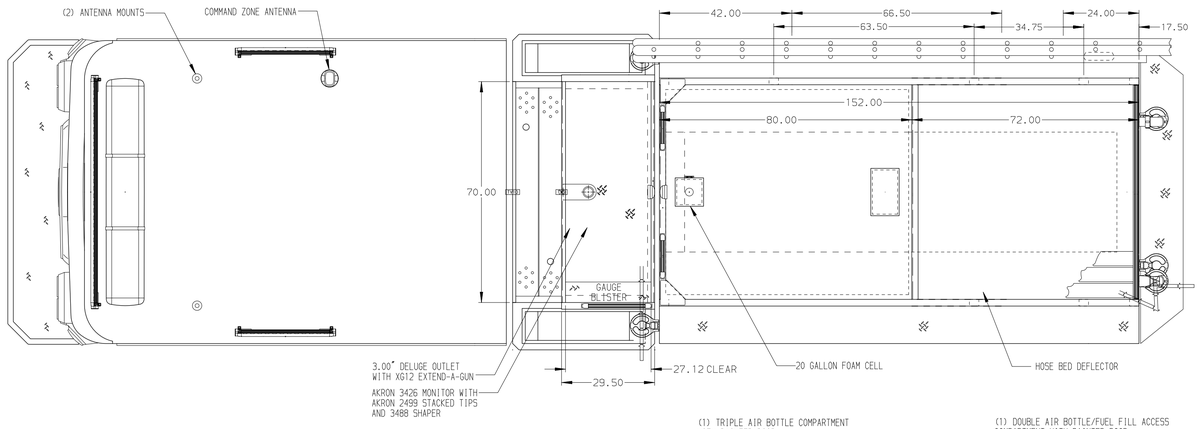

HOSEBED CAPACITIES

1. 400' OF 1.75" D.J. POLY HOSE
2. 200' OF 2.50" D.J. POLY HOSE
3. 1000' OF 5.00" D.J. POLY HOSE
4. 200' OF 2.50" D.J. POLY HOSE
5. 250' OF 1.75" D.J. POLY HOSE

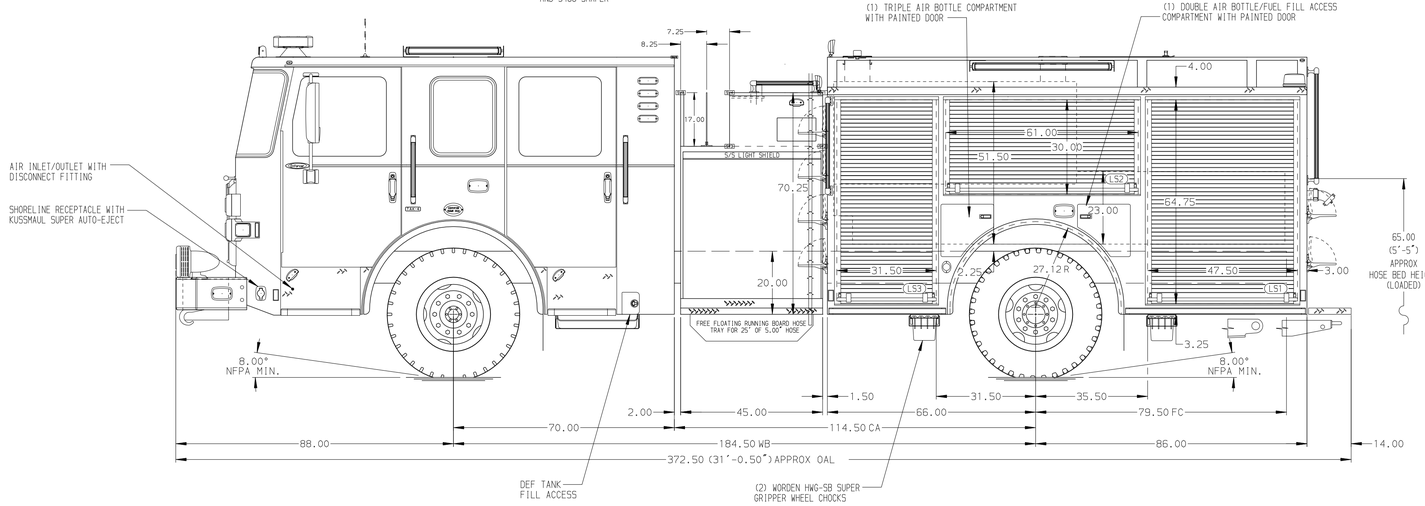

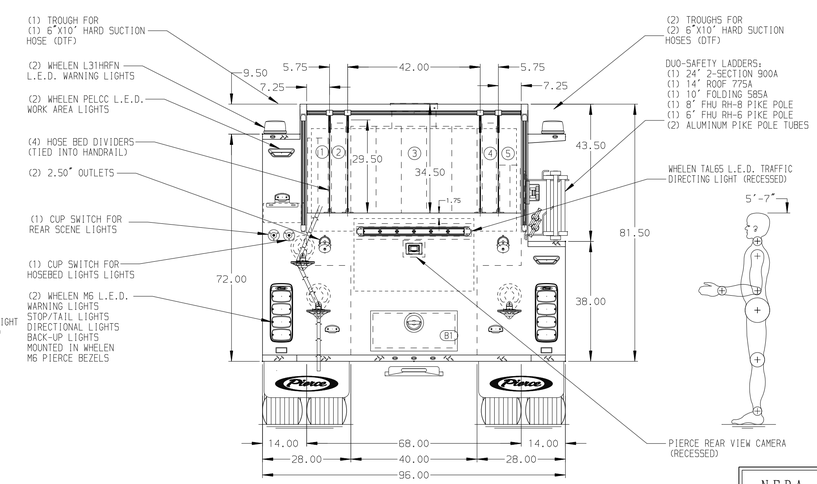

NFPA 1900 (2024) COMPLIANT

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
3. FOUR 15/20A 120V RECEPTACLES LOCATED PER ORDER
4. PLUMBING FOR FUTURE FOAM SYSTEM 3/12

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

PIERCE MANUFACTURING INC.

REV	DATE	BY	CH	
V	22JUN26	DLH	WME	

CHASSIS DATA

MAKE: PIERCE

MODEL: ENFORCER

TITLE: 1500GPM, 1020G TANK, 1000G WATER, 20G FOAM 152" 2G PUMPER, MUX

FOR: PIERCE STOCK UNIT APPLETON, WI

DWG NO.: 46032AD

JOB NO.	46032
SCALE	1:24
DATE	
DRAWN BY	DLH
DATE	08MAY26
CHECKED BY	WME
DATE	08MAY26
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 23-JUN-2026 10:30:26