PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

ELECTRICAL SYSTEM
MUX

CHASSIS

AXLE,FRONT,CUSTOM
19,500 Lb TAK-4 Axle

AXLE,REAR
24,000 Lb Dana Axle

ENGINE
455 HP Cummins X12 Engine

TRANSMISSION
ALlison 6th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
6000 Enforcer Cab

BODY

TOTAL TANK CAPACITY
530 Gallon New York Style Poly Tank

WATER CAPACITY
500 Gallons of Water

FOAM CELL CAPACITY
30 Gallon Foam Cell

COMPT,PUMPER,REAR
30.75" FF Rollup Rear Compt

COMPT,PUMPER,LEFT SIDE
136" Rollup Full Height Compts

COMPT,PUMPER,RIGHT SIDE
136" Rollup Low Compts

FIRE SUPPRESSION

PUMPHOUSE
48" Control Zone Side Mount

PUMP
1500 GPM Hale DSD

CROSSLAYS,1.50"
(2) 1.75" Standard Capacity


CROSSLAYS,2.50"
2.50" Crosslay Not Required


SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required


FOAM SYSTEM
External Foam System


SAFETY
Side Roll and Frontal Impact Protection Not Required

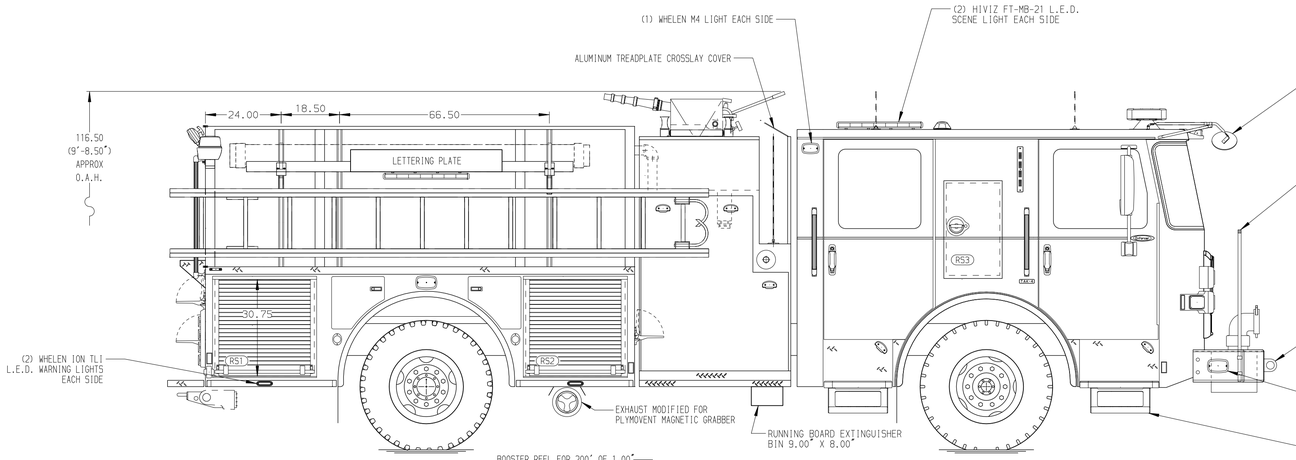

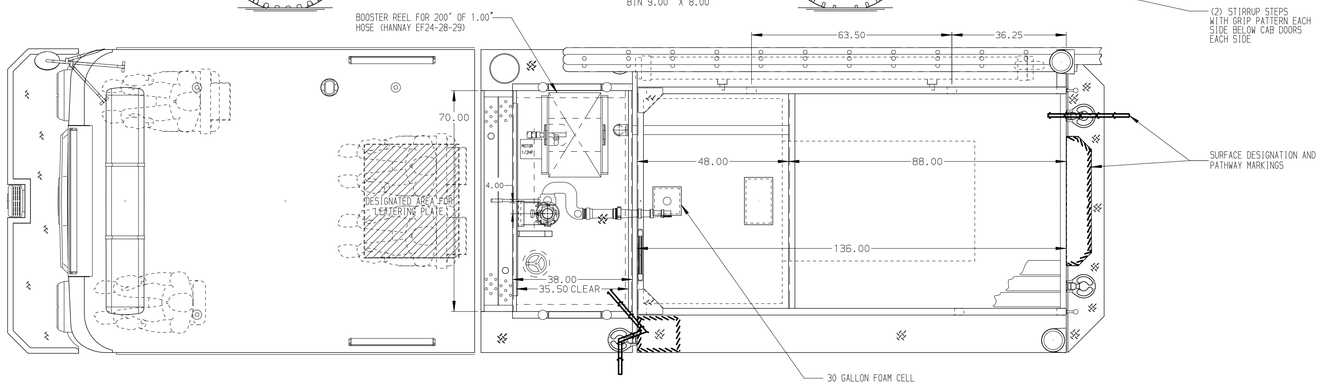

HOSEBED CAPACITIES
1. 400' OF 1.75" D.J. POLY HOSE
2. 800' OF 2.50" D.J. POLY HOSE
3. 1000' OF 4.00" D.J. POLY HOSE
4. 200' OF 2.50" D.J. POLY HOSE
5. 150' OF 1.75" D.J. POLY HOSE
6. 150' OF 1.75" D.J. POLY HOSE

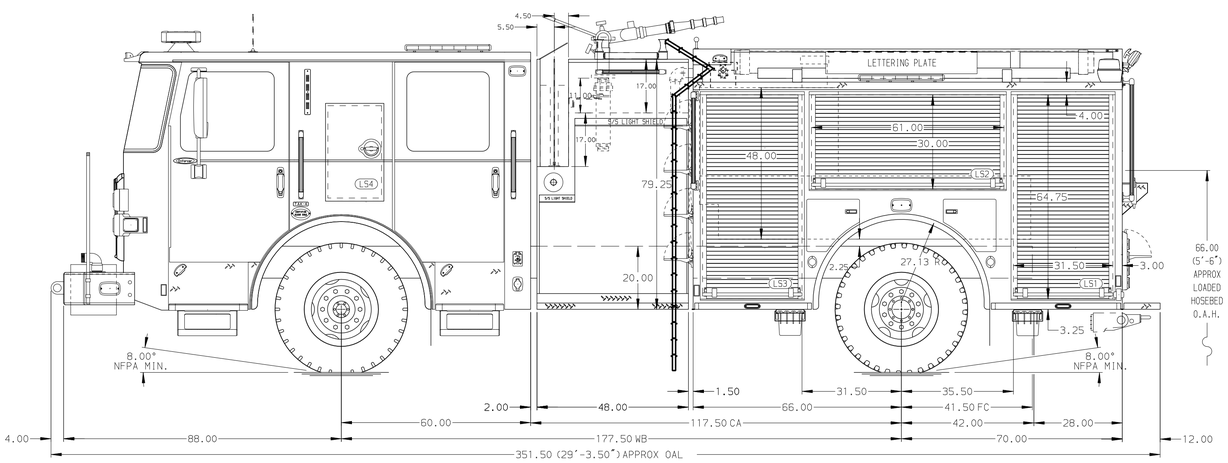

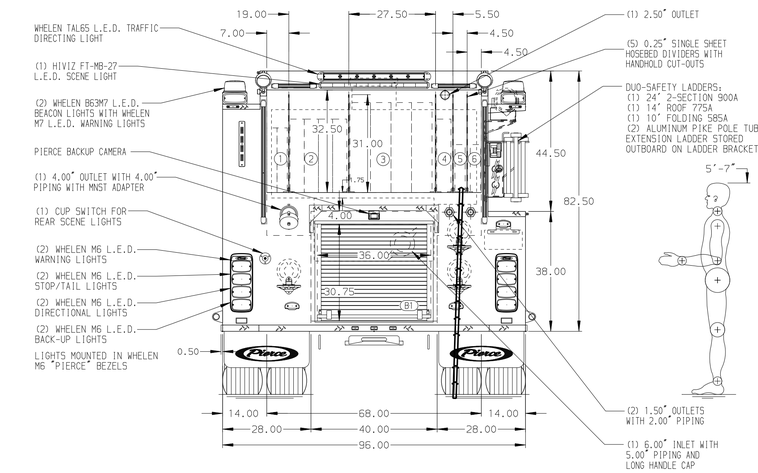

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON THE DRIVER SIDE REAR OF CREW CAB DOOR
3. AIR INLET WITH DISCONNECT COUPLING LOCATED ON THE DRIVER SIDE REAR OF CREW CAB DOOR
4. BATTERY CHARGER LOCATED PER ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
6. TWO FIXED SHELVES LOCATED PER ORDER
7. TWO 120V RECEPTACLES LOCATED PER ORDER

REV	DATE	BY	CH
3	05MAR26	MPM	COS
2	09FEB26	MPM	COS

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing –
FOR: Reading Department of Fire & Rescue Services –
DWG NO.: 42054AD

JOB NO.: 42054 01-03
SCALE: 1:24
DRAWN BY: JER
DATE: 17DEC25
CHECKED BY: ADS
DATE: 17DEC25
SHEET SIZE: D
SHEET NO.: 1 OF 1

View File Created 06-MAR-2026 12:25:46