PUMPER, PUC

BODY
Pumper, PUC, Aluminum

CHASSIS
Enforcer Chassis, PUC

ELECTRICAL SYSTEM
MUX

CHASSIS

AXLE,FRONT,CUSTOM
18,000 lb Dana Axle

AXLE,REAR
27,000 lb Dana Axle

ENGINE
510 HP Paccar MX13 Engine

TRANSMISSION
Allison 6th Gen, 4000 EVS P

BUMPER
19" Extended Painted Steel

CAB
7010 Enforcer Cab, PUC

BODY

TOTAL TANK CAPACITY
750 Gallon Poly Tank

WATER CAPACITY
750 Gallons of Water

FOAM CELL CAPACITY
Foam Cell Not Required

COMPT,PUMPER,REAR
33.50" FF Rollup Rear Compt w/Tailboard, PUC

COMPT,PUMPER,LEFT SIDE
177" Rollup Full Height & Depth Front & Rear, PUC

COMPT,PUMPER,RIGHT SIDE
177" Rollup Full Height & Depth Front & Rear, PUC

FIRE SUPPRESSION

PUMPHOUSE
Control Zone, PUC

PUMP
1500 GPM Pierce PUC


CROSSLAYS,1.50"
(2) 1.50", Poly Trays, 200'


CROSSLAYS,2.50"
2.50" Crosslays Not Required


SPEEDLAYS
Speedlays Not Required

GENERATOR
Generator Not Required


FOAM SYSTEM
Foam System Not Required

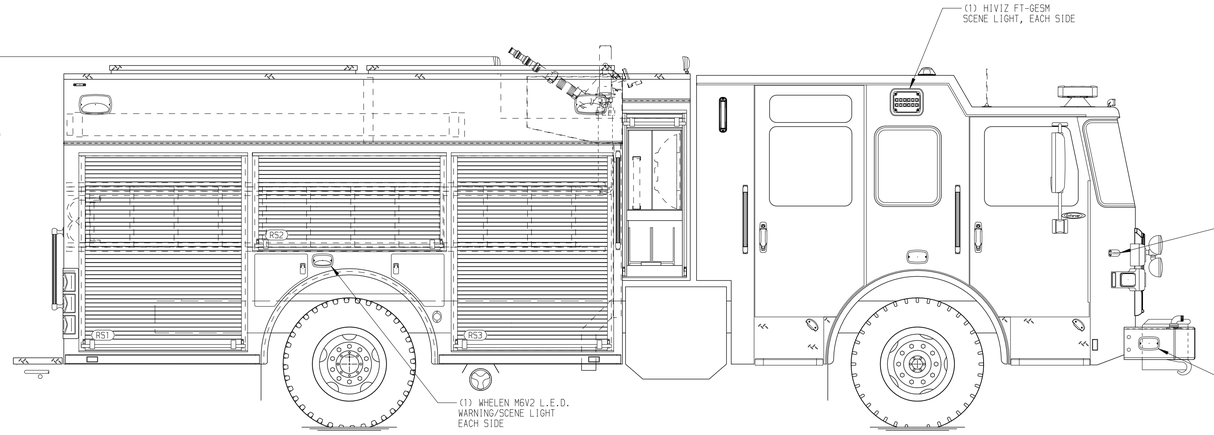


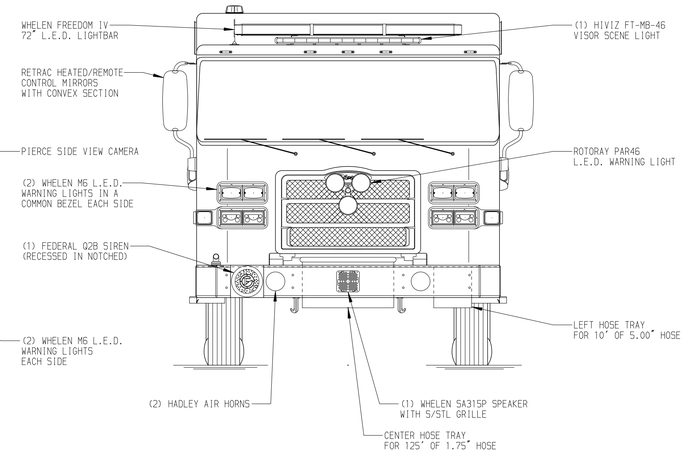

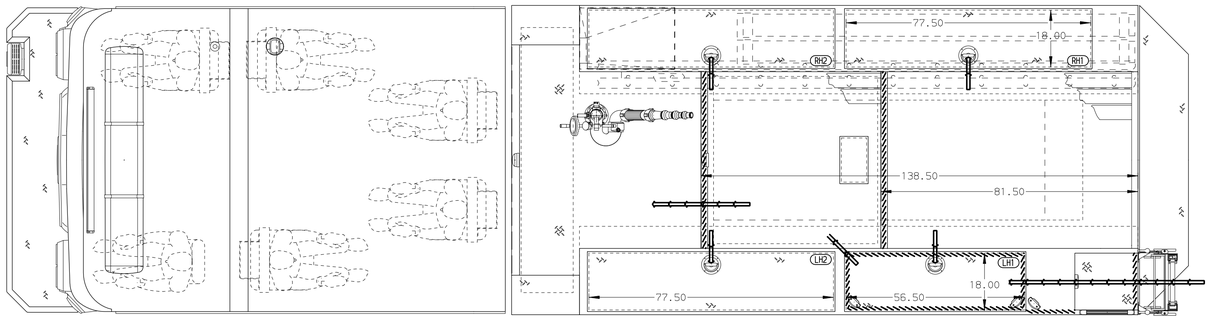

HOSEBED CAPACITIES
1. 1000' OF 4.00" D.J. POLY HOSE
2. 400' OF 1.75" D.J. POLY HOSE
3. 700' OF 2.50" D.J. POLY HOSE

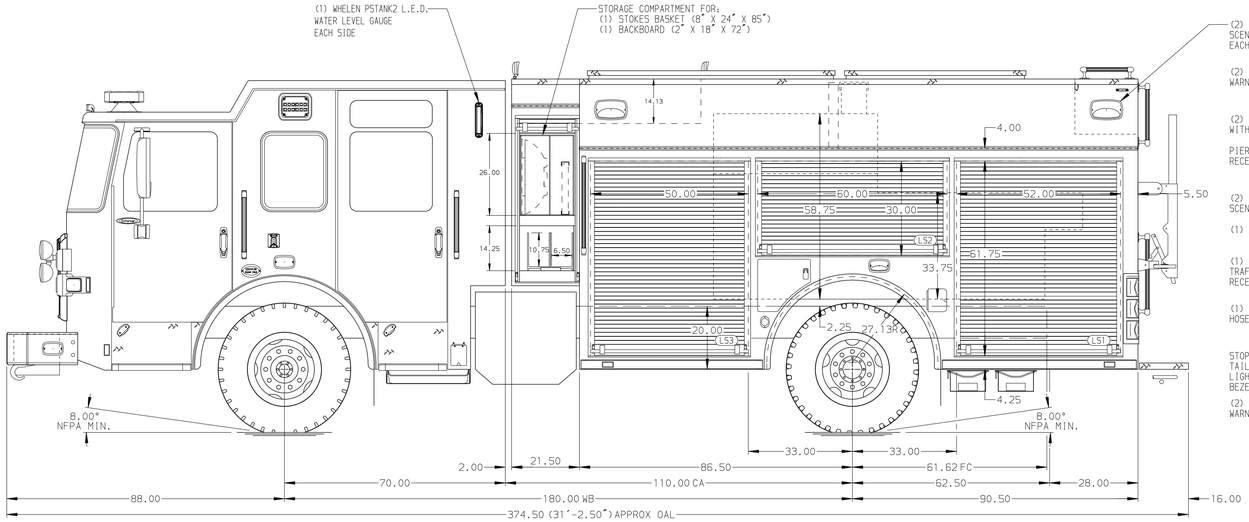

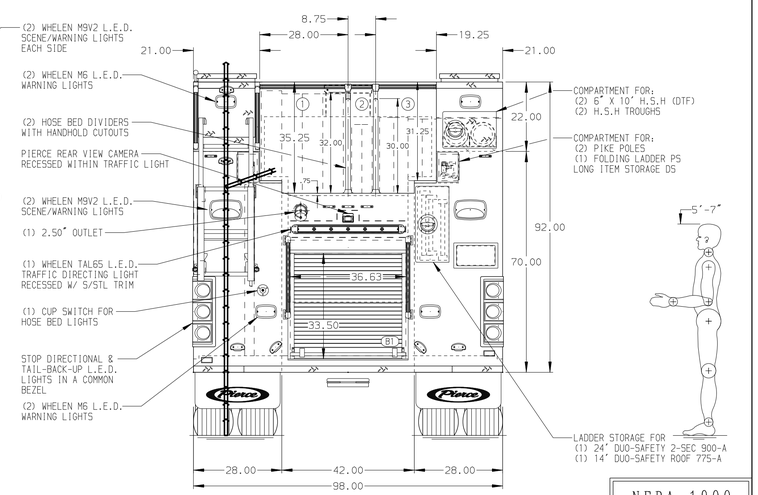

NFPA 1900 (2024) COMPLIANT

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP BUMPER RIGHT SIDE
2. BLUE SEA SHORELINE RECEPTACLE LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET/OUTLET WITH DISCONNECT COUPLING ON THE DRIVER SIDE PUMP PANEL
4. BATTERY CHARGER LOCATED DRIVER SIDE BEHIND SEAT
4. BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
6. FIVE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT PER SHOP ORDER
8. ONE SPECIAL SIZE ADJUSTABLE SHELF LOCATED IN COMPARTMENT PER SHOP ORDER
9. ONE CTECH FOUR DRAWER ASSEMBLY LOCATED IN COMPARTMENT PER SHOP ORDER
10. ONE SWING-OUT TOOLBOARD LOCATED IN COMPARTMENT PER SHOP ORDER
11. FOUR PEGBOARDS MOUNTED ON BACK WALL IN COMPARTMENT PER SHOP ORDER
12. AUTOMATIC TIRE CHAINS
13. OIL DRY HOPPER WITH 200 LBS. OF OIL DRY ABSORBENT LOCATED PER SHOP ORDER

REV	DATE	BY	CH
V	23MAR26	JDA	TDC
V	27FEB26	JDA	TDC
V	28JAN26	JDA	TDC

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing
FOR: City of Hendersonville
DWG NO.: 42920AD

JOB NO.: 42920
SCALE: 1:24
DATE
DRAWN BY: JDA — 05DEC25
CHECKED BY: MMF — 05DEC25
SHEET SIZE: D
SHEET NO.: 1 OF 1

View File Created 30-JUN-2026 08:16:49