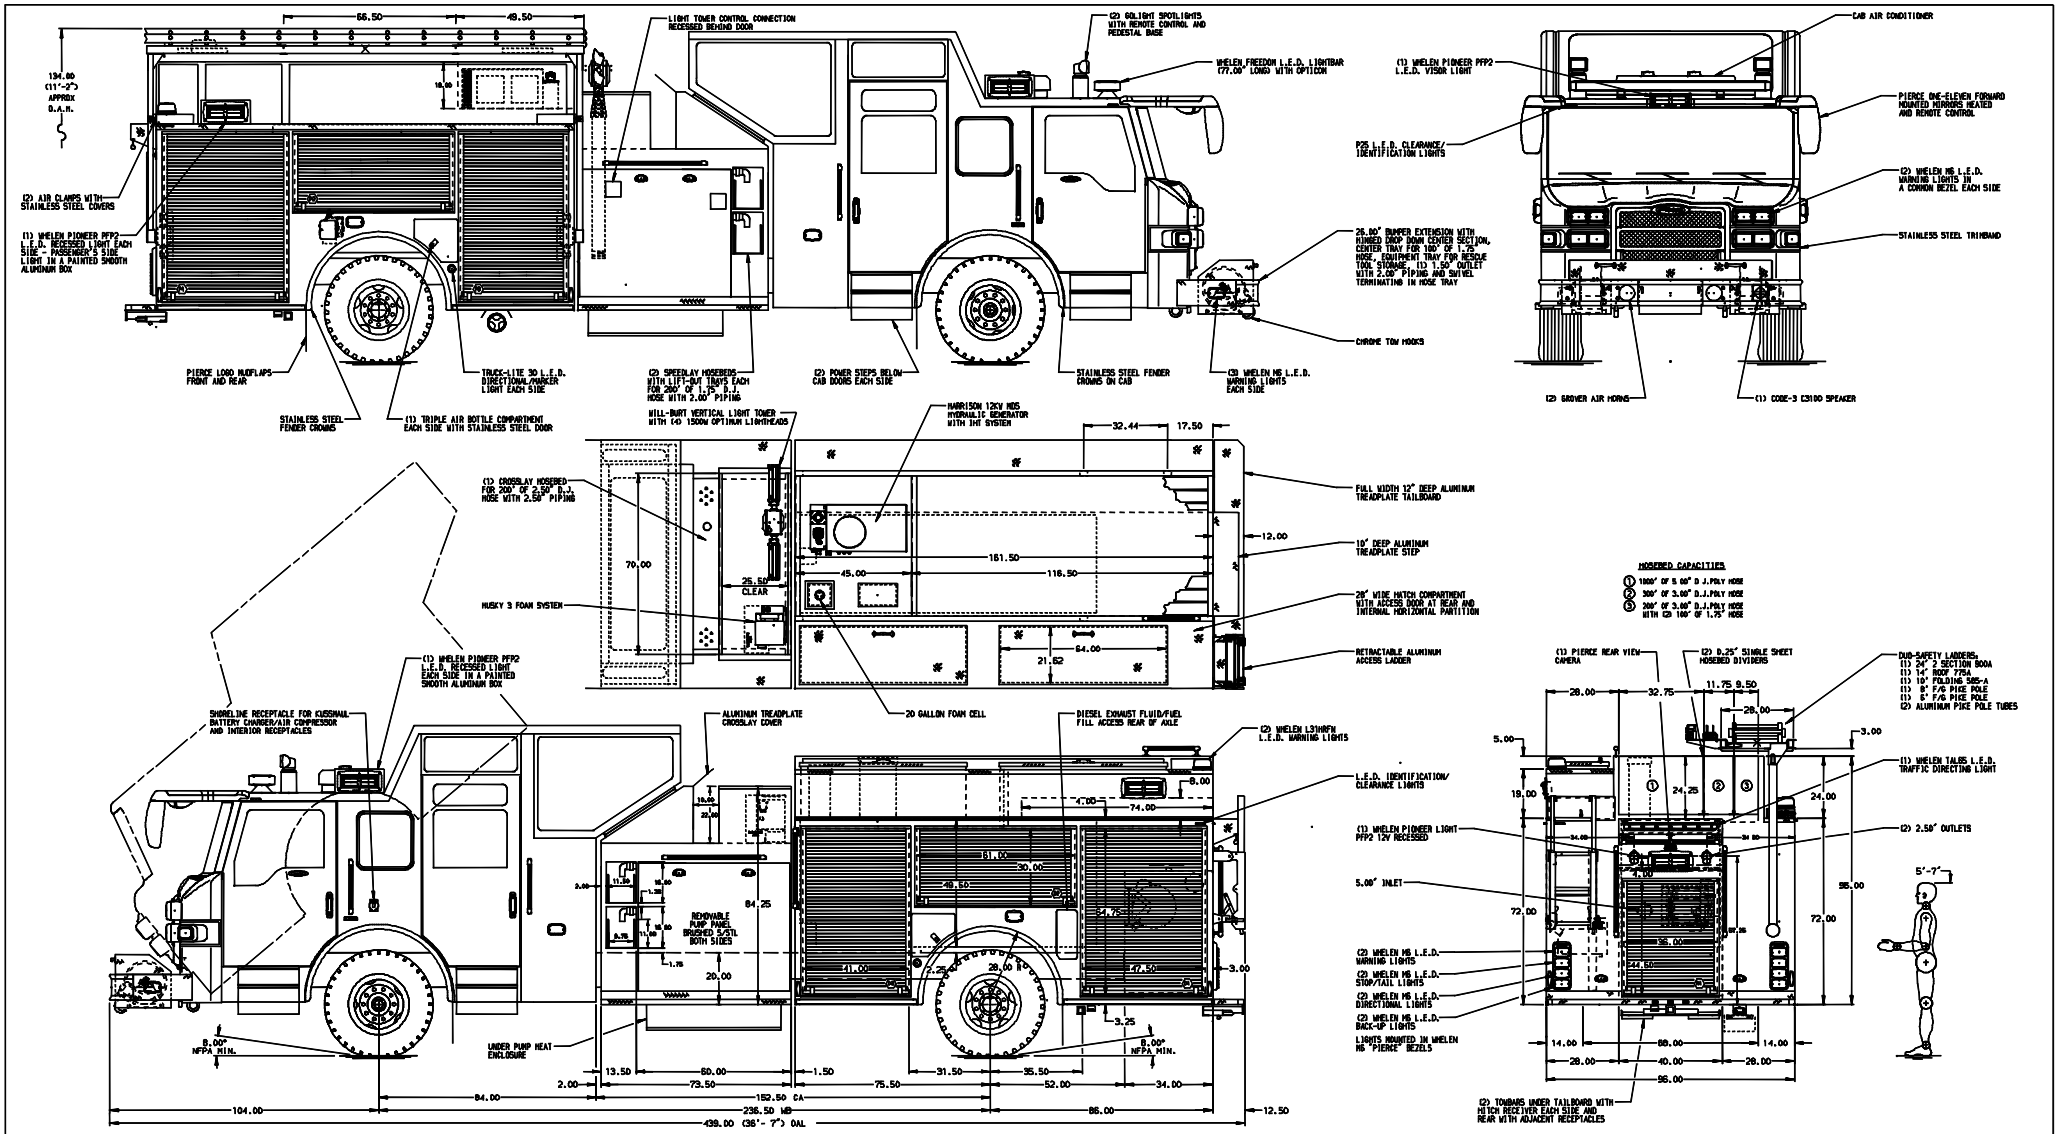

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
3. BATTERY CHARGER/AIR COMPRESSOR IN COMPARTMENT B3
4. BATTERY CHARGE INDICATION LOCATED ON DRIVER'S SIDE SEAT RISER WITH BRACKET
5. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
6. ANCHOR LUNA BAG COMPARTMENT LIGHTS LOCATED PER SHOP ORDER
7. FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELVES - ONE IN COMPARTMENTS D2, P1 AND P2 AND TWO IN P3
8. FLOOR MOUNTED SLIDE-OUT TRAYS - ONE IN COMPARTMENTS D3 AND R1
9. ADJUSTABLE SLIDE-OUT TRAY - ONE IN COMPARTMENT D3
10. ADJUSTABLE TILTING SLIDE-OUT TRAY - ONE IN COMPARTMENT D3
11. SLIDE-OUT TOOL BOARDS - THREE IN COMPARTMENT D1
12. 250# OIL DRY HOPPER WITH FLIP DOWN CHUTE IN COMPARTMENT P1
13. CTECH DRAWER ASSEMBLY IN COMPARTMENT P1
14. VERTICAL PARTITION - TWO IN COMPARTMENT D2
15. 1" SHAPER PARTITION - ONE IN COMPARTMENT R1
16. STORAGE BIN FOR FOURTEEN AIR BOTTLES IN COMPARTMENT P2
17. CIRCUIT BREAKER PANEL IN COMPARTMENT P3
18. FOUR PLACE AIR BAG RACK IN COMPARTMENT P2
19. ADJUSTABLE SUPPORT PLATE - ONE IN COMPARTMENT P1
20. TWO HANNAY ELECTRIC REWIND HYDRAULIC HOSE REELS MODEL EF 2016-17-18 EACH WITH CAPACITY FOR 100' OF .25" I.D. DUAL HYDRAULIC HOSE LOCATED IN FRONT BUMPER
21. TWO 15A 120V DUPLEX RECEPTACLES LOCATED IN CAB PER SHOP ORDER
22. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL EER 1618-17-18 WITH CAPACITY FOR 200' OF 16/3 CORD IN COMPARTMENT R1
23. PERMANENT SHELF - ONE IN COMPARTMENT D2
24. MOUNTING BRACKET FOR POWER SUPPLY IN COMPARTMENT P3

REV	DATE	BY	CH		
V	28JAN13	SHA	COR	CHASSIS DATA	
V	10JAN13	JRO	COR		
V	08JAN13	JRO	COR	MAKE	
V	16NOV12	BZI	TEO	PIERCE	
V	07NOV12	BZI	TEO	MODEL	
				VEL8426	

CUSTOMER APPROVAL
APPROVED BY: _____
DATE:

Pierce MANUFACTURING INC.

TITLE: 1500-D-770 750 GAL WATER W/20 GAL FOAM, 161" RESCUE BODY, ENCLOSED TOP MOUNT, (2)SPEEDLAYS, (1)CROSSLAY

FOR: CITY OF DELANO, DELANO, MN

DWG NO.: 26451AD

JOB NO.	26451
SCALE	1:24
DATE	310CT12
DRAWN BY	JRO
CHECKED BY	BZI
DATE	01NOV12
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 29-Jan-2013 10:26:18