PUMPER

BODY
Long Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM
19,500 lb TAK-4 Axle

AXLE, REAR
27,000 lb Dana Axle

ENGINE
500 HP Cummins X12 Engine

TRANSMISSION
Allison 6th Gen, 3000 EVS P

BUMPER
16" Extended Stainless Steel

CAB
7010 Enforcer Cab

BODY

WATER TANK
1000 Gallon New York Style Water Tank

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, LEFT SIDE
171" Rollup Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE
171" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
56" Control Zone Top Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
1.50" Crosslays Not Required

CROSSLAYS, 2.50"
(2) 2.50" Standard Capacity

SPEEDLAYS
(3) 1.50" Std. Capacity

GENERATOR
Generator Not Required

Foam System
Husky 3 Single Agent Foam System

Foam Cell
20 Gallon Foam Cell, Reduced Water

Side Roll and Frontal Impact Protection

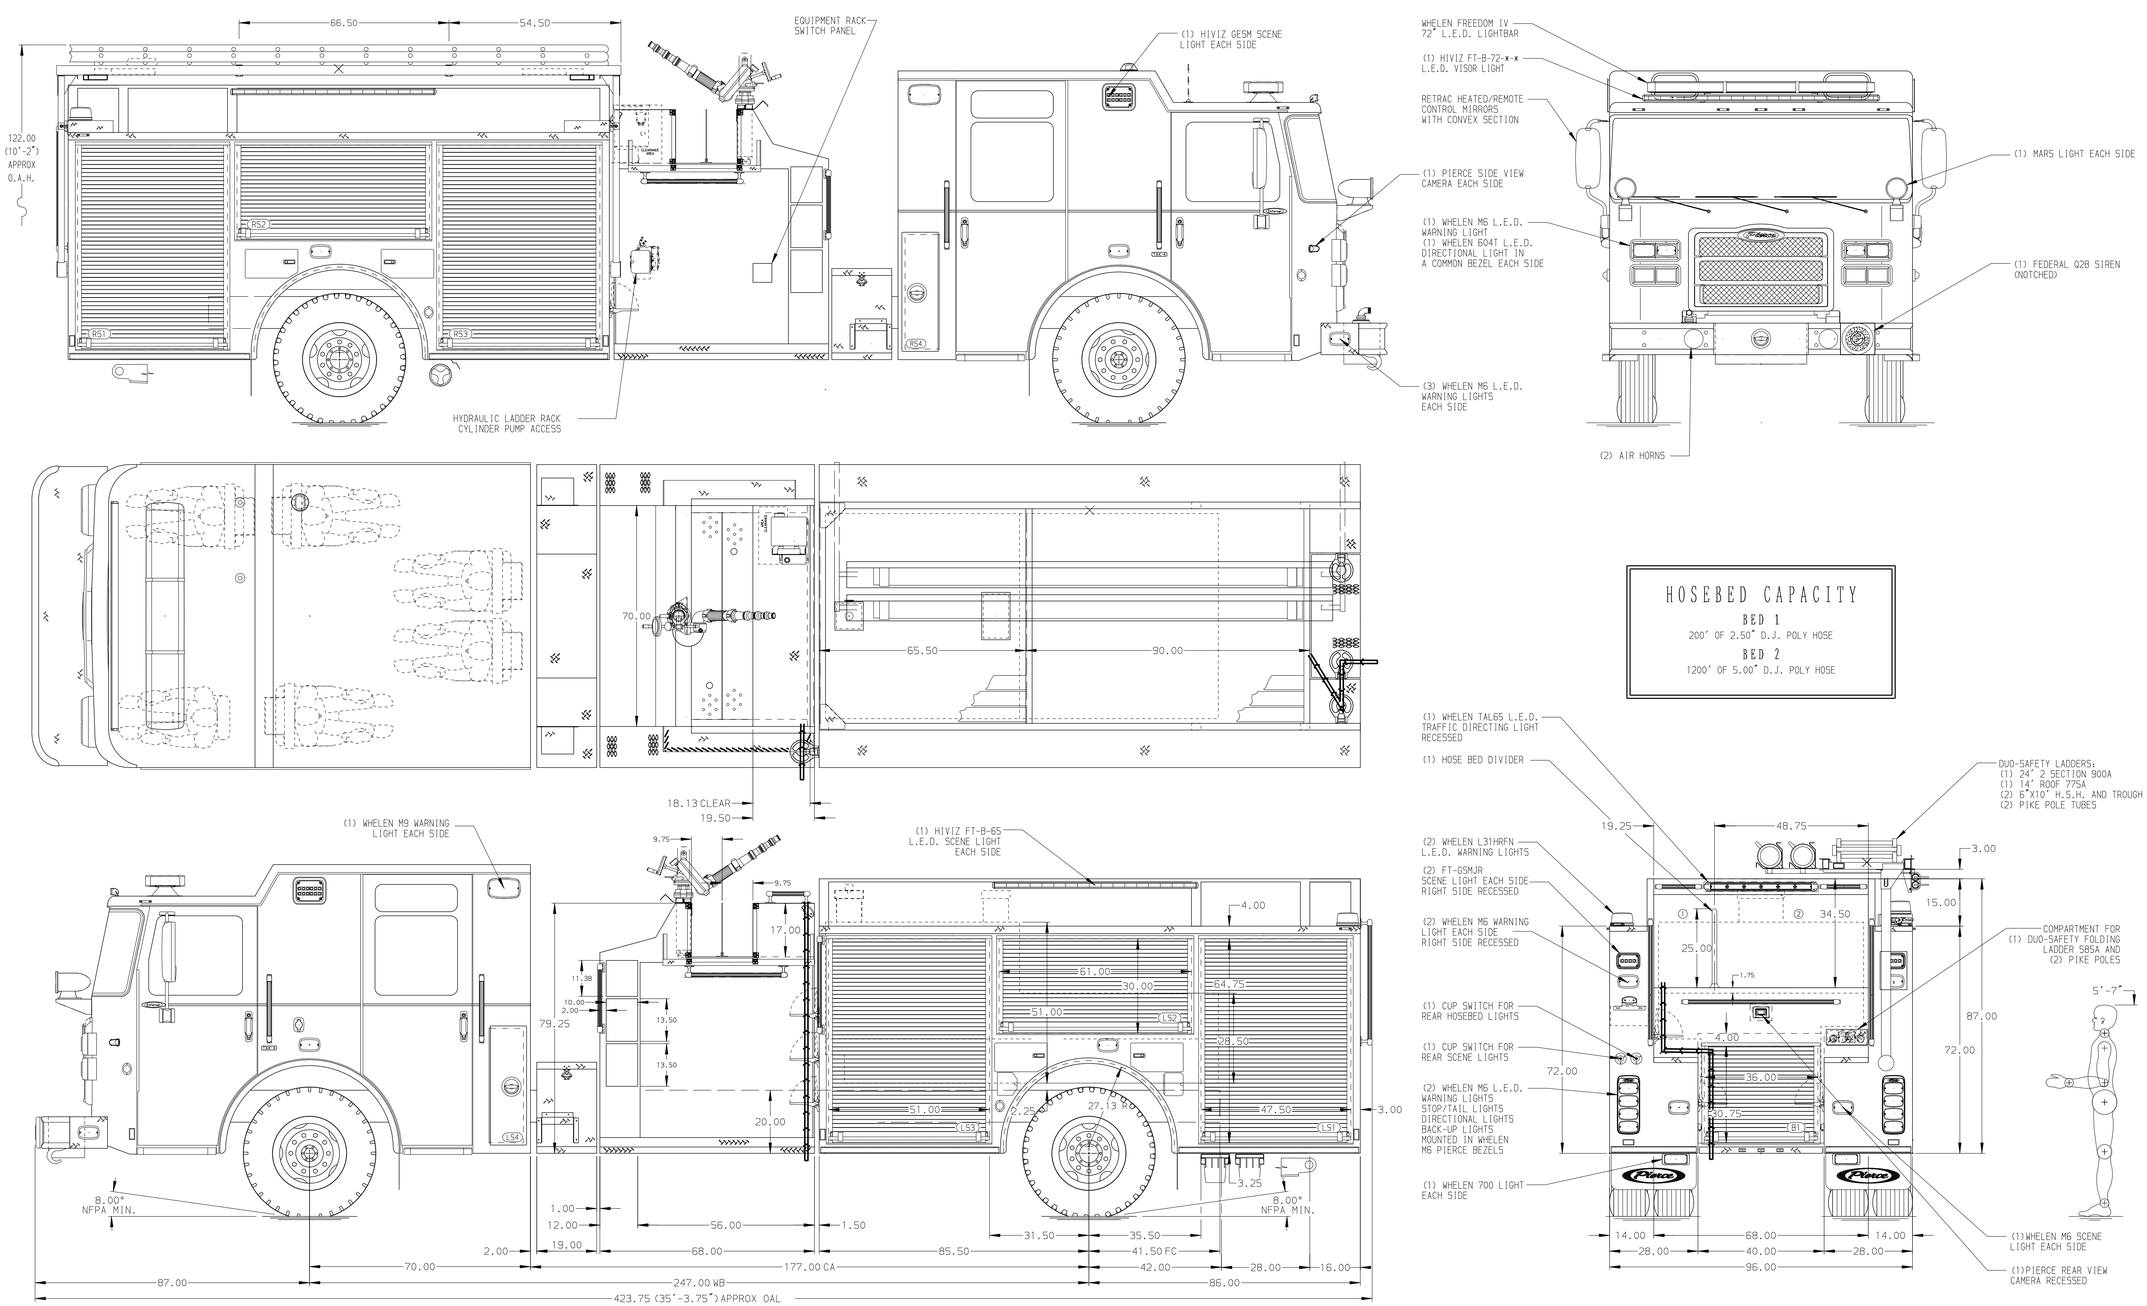

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED ON TOP BUMPER RIGHT SIDE
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
4. BATTERY CHARGER LOCATED PER ORDER
5. EIGHT ADJUSTABLE SHELVES LOCATED PER ORDER
6. ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
7. AIR OUTLET W/SHUTOFF VALVE LOCATED PER SHOP ORDER

REV	DATE	BY	CH
3	17NOV23	MMF	CHR
2	14SEP23	MMF	COS
1	07SEP23	MMF	COS

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: Pierce Pumper Approval Drawing
FOR: Vienna Vol Fire Department
DWG NO.: 39050AD

JOB NO. 39050
SCALE 1:24
DATE
DRAWN BY WRE 18JUL23
CHECKED BY MMF 25JUL23
SHEET SIZE D
SHEET NO. 1 OF 1

View File Created 20-NOV-2023 11:54:12