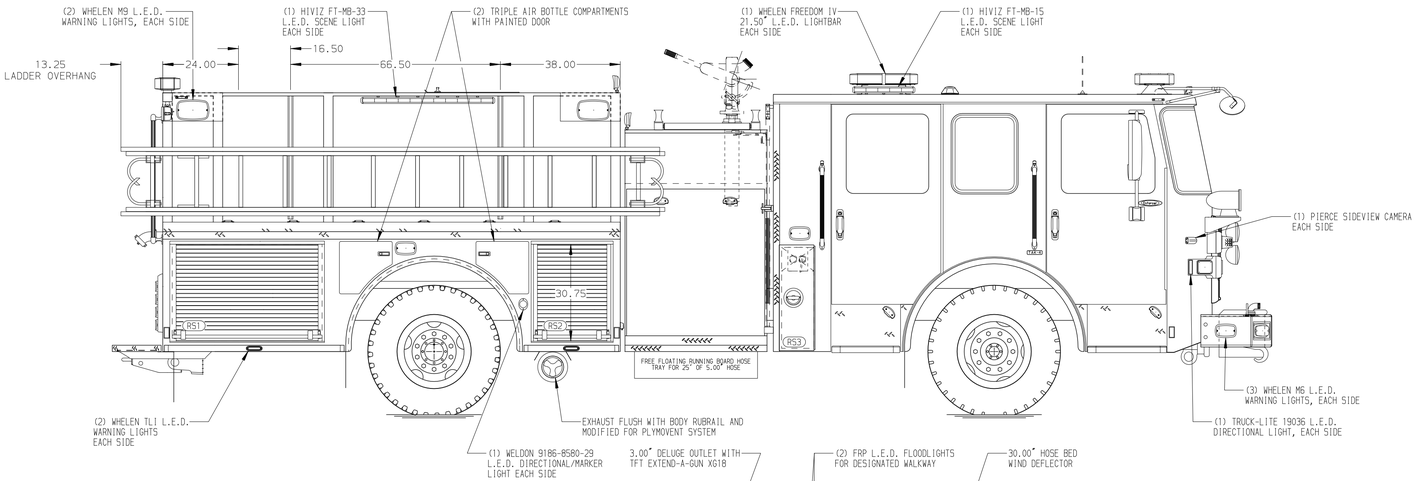

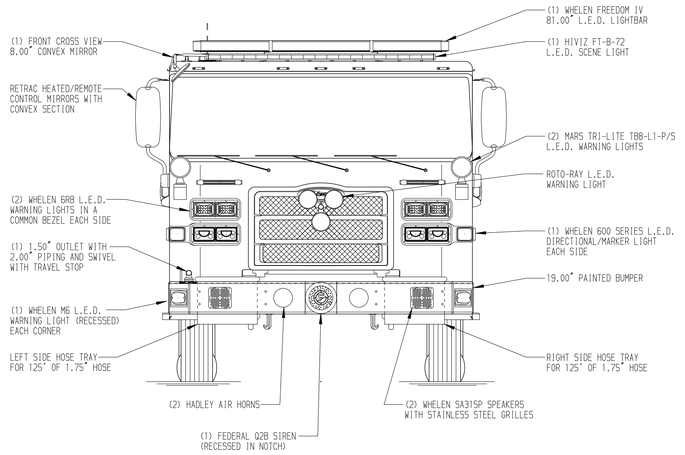

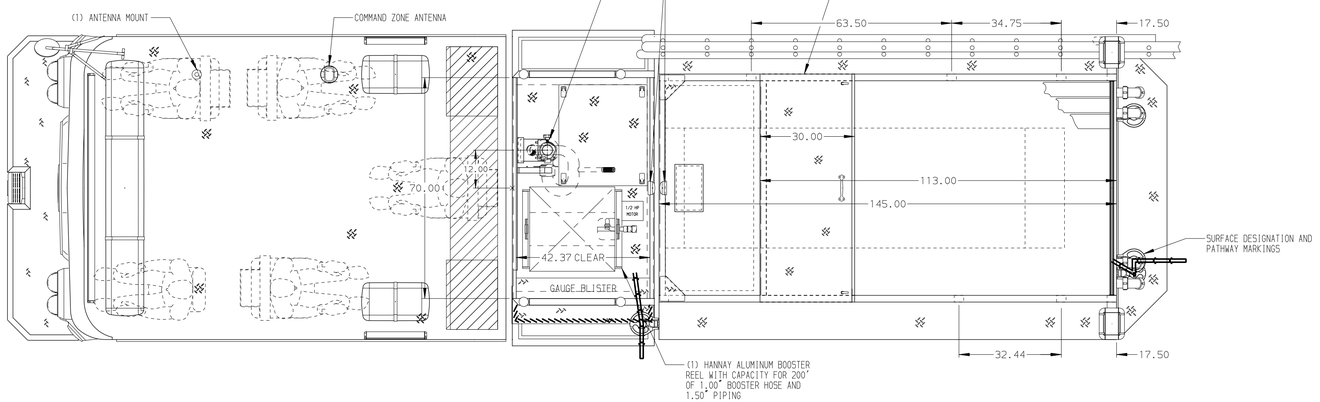

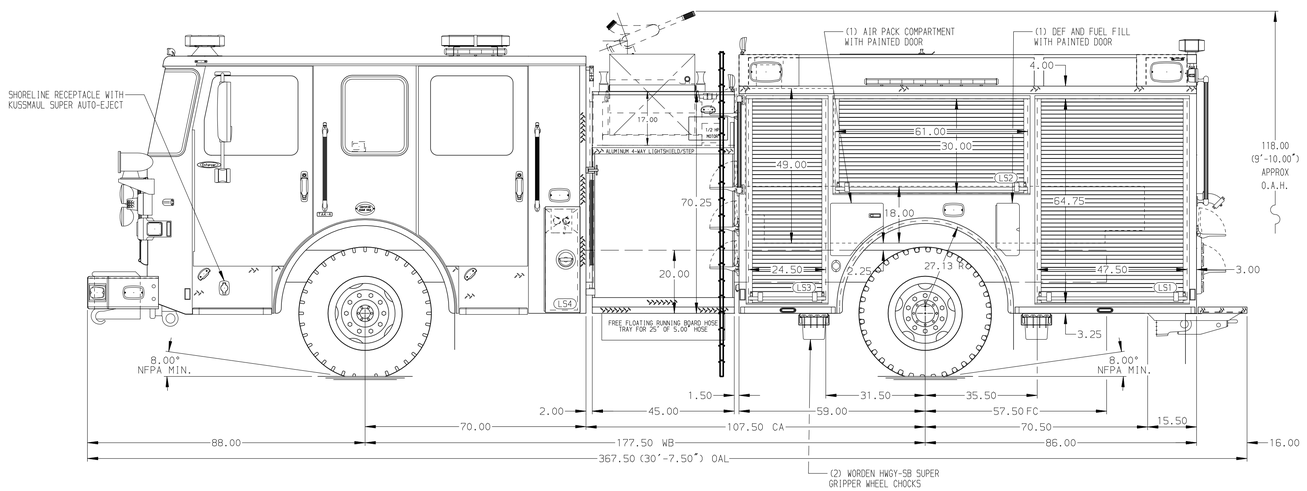

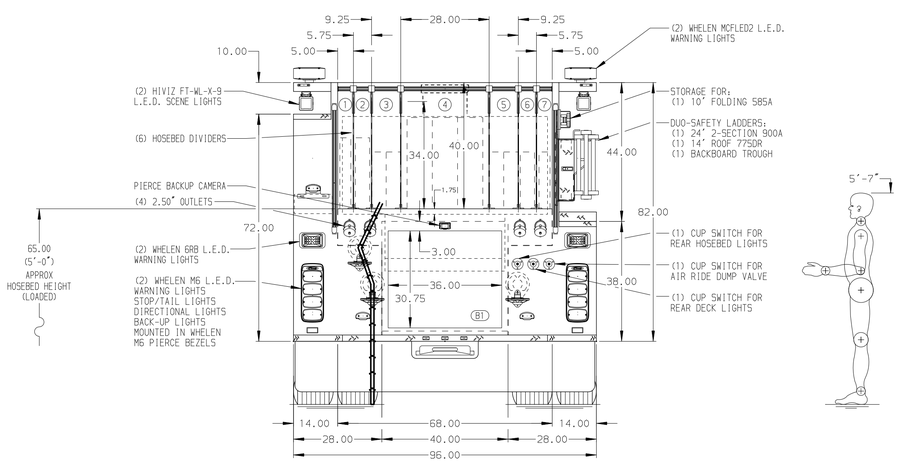

HOSEBED CAPACITIES

1. 250' OF 1.88" D.J. POLY HOSE
2. 250' OF 2.50" D.J. POLY HOSE
3. 400' OF 2.50" D.J. POLY HOSE
4. 1000' OF 5.00" SUPPLY LINE
5. 400' OF 2.50" D.J. POLY HOSE
6. 200' OF 2.50" D.J. POLY HOSE
7. 200' OF 1.88" D.J. POLY HOSE

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. KUSSMAUL AIR COMPRESSOR LOCATED PER ORDER
2. AIR INLET/OUTLET WITH DISCONNECT COUPLING IN DS PUMP PANEL
3. BATTERY CHARGER LOCATED PER ORDER
4. BATTERY CHARGE INDICATOR LOCATED BEHIND DRIVER'S SIDE CAB WINDOW
5. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
6. TWO PIKE POLE TUBES TO BE INSTALLED IN THE TRANSVERSE COMPARTMENT

REV	DATE	BY	CH
3	30JUN25	JDA	CLM
2	22MAY25	JDA	CLM
1	09JAN25	JDA	BSE

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 2000GPM, 500G WATERTANK 145" PUMPER, MUX
FOR: WINSTON-SALEM FIRE DEPARTMENT WINSTON-SALEM, NORTH CAROLINA
DWG NO. 39621AD-SH1

JOB NO.	39621
SCALE	1:24
DATE	
DRAWN BY	JDA
DATE	19DEC24
CHECKED BY	CMS
DATE	20DEC24
SHEET SIZE	D
SHEET NO.	1 OF 2

View File Created 23-JUL-2025 10:12:21